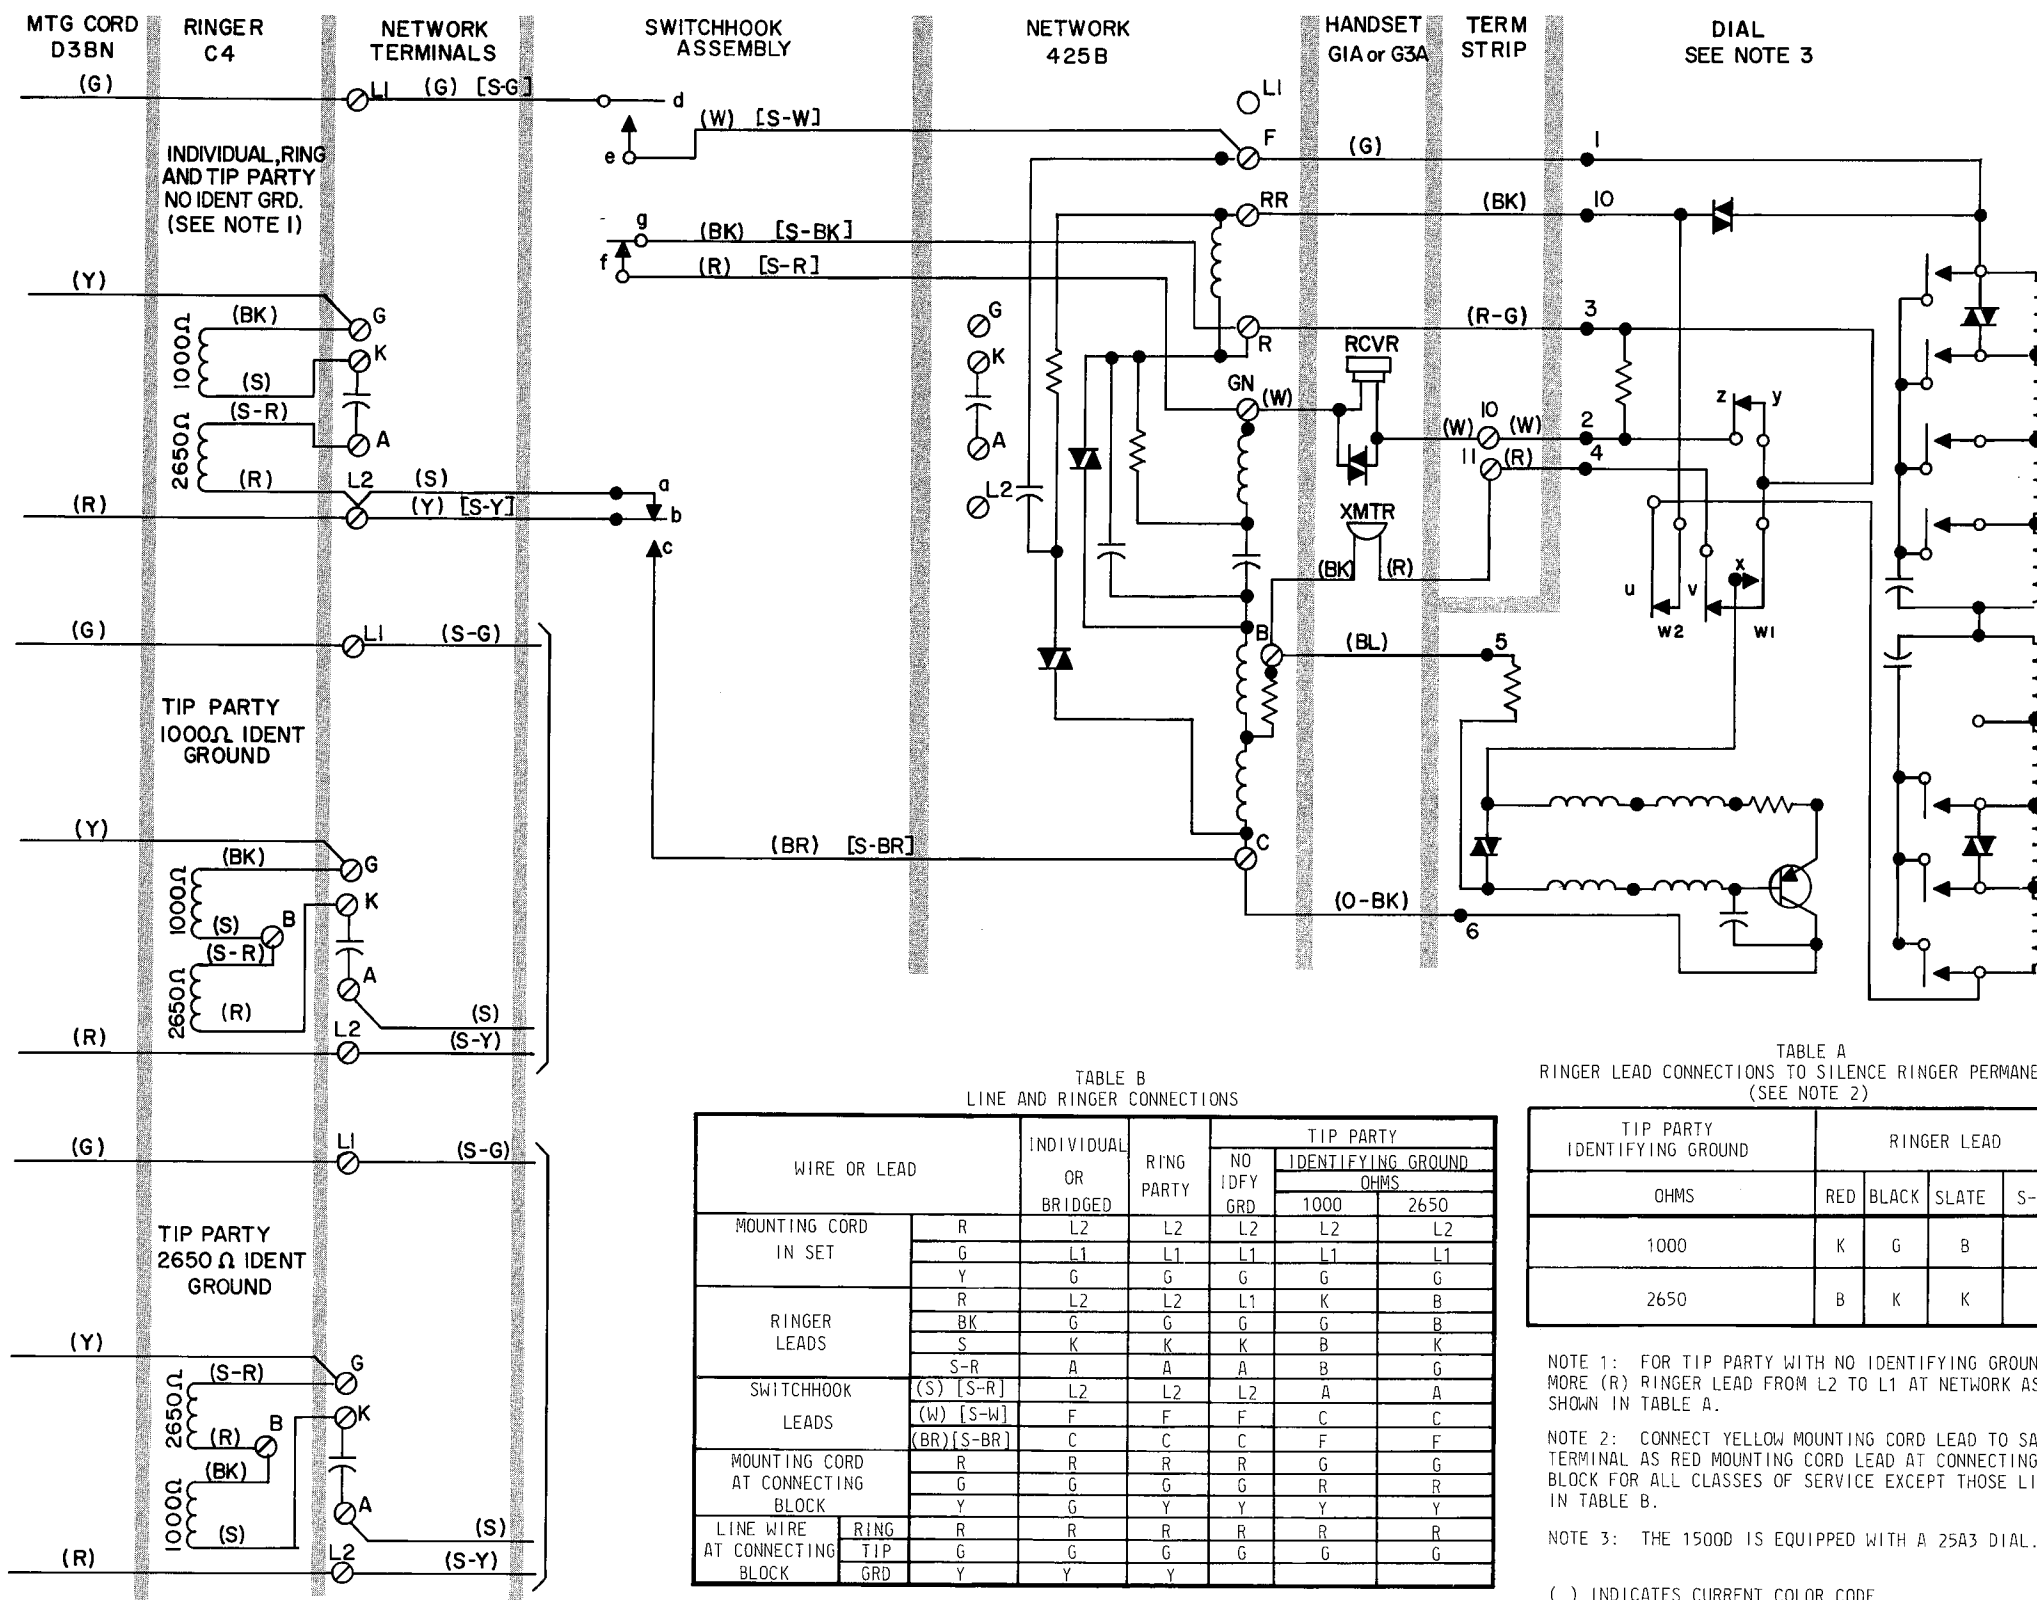


TELEPHONE SETS—1500 D
CONNECTIONS

TABLE B
LINE AND RINGER CONNECTIONS

WIRE OR LEAD	INDIVIDUAL OR BRIDGED	RINGER PARTY	TIP PARTY IDENTIFYING GROUND			
			NO IDFY GRD	OHMS		
				1000	2650	
MOUNTING CORD IN SET	R	L2	L2	L2	L2	L2
	G	L1	L1	L1	L1	L1
	Y	G	G	G	G	G
RINGER LEADS	R	L2	L2	L1	K	B
	BK	G	G	G	G	B
	S	K	K	K	B	K
	S-R	A	A	A	B	G
SWITCHHOOK LEADS	(S) [S-R]	L2	L2	L2	A	A
	(W) [S-W]	F	F	F	C	C
	(BR) [S-BR]	C	C	C	F	F
MOUNTING CORD AT CONNECTING BLOCK	R	R	R	R	G	G
	G	G	G	G	R	R
	Y	G	Y	Y	Y	Y
LINE WIRE AT CONNECTING BLOCK	RING	R	R	R	R	R
	TIP	G	G	G	G	G
	GRD	Y	Y	Y		

TABLE A
RINGER LEAD CONNECTIONS TO SILENCE RINGER PERMANENTLY (SEE NOTE 2)

TIP PARTY IDENTIFYING GROUND OHMS	RINGER LEAD			
	RED	BLACK	SLATE	S-RED
OHMS				
1000	K	G	B	K
2650	B	K	K	G

NOTE 1: FOR TIP PARTY WITH NO IDENTIFYING GROUND: MORE (R) RINGER LEAD FROM L2 TO L1 AT NETWORK AS SHOWN IN TABLE B.

NOTE 2: CONNECT YELLOW MOUNTING CORD LEAD TO SAME TERMINAL AS RED MOUNTING CORD LEAD AT CONNECTING BLOCK FOR ALL CLASSES OF SERVICE EXCEPT THOSE LISTED IN TABLE B.

NOTE 3: THE 1500 IS EQUIPPED WITH A 25A3 DIAL.

() INDICATES CURRENT COLOR CODE

[] INDICATES MD COLOR CODE

Fig. 1 - 1500 Telephone Set, Connections