


TABLE A TERMINAL-ASSY STRAPPING TO SELECT CONNECTOR-HOLDING AND RELEASE CONTROL					
CONNECTOR-HOLDING AND RELEASE CONTROL	LAST-PARTY RELEASE		CALLING-PARTY RELEASE		CALLING-PARTY RELEASE WITH TIMED DISCONNECTION
	SHOP SIDE	INSTALLER'S SIDE	SHOP SIDE	INSTALLER'S SIDE	
TERMINAL-ASSY STRAPPING	9	9	9	9	9
	8	8	8	8	8
	7	7	7	7	7
	6	6	6	6	6
	5	5	5	5	5
	4	4	4	4	4
	3	3	3	3	3
	2	2	2	2	2
	1	1	1	1	1
	1	1	1	1	1
APPLICATION	ISSUES				
FACTORY'S STANDARD "FIGURE 1A" WIRING	18 LATER				*
INSTALLER'S POSSIBLE RE-WIRING (NOTE 52)	18 LATER	*	*		

OPTIONS TABLE					
APP AND/OR WIRING	ISSUES		WIRED BY		NOTES
	FIRST USED	LAST USED	FACTORY	INSTALLER	
1	1		*		A 52
2	1	4	*		A 52
3	1		*		
4	1		*		
5	1		*		
6	1		*		
7	1		*		
8	1		*		
9	1		*		
10	1		*		A 52
11	1		*		
12	1		*		
13	1		*		
14	1		*		
15	1		*		
16	1		*		
17	1		*		
18	1		*		
19	1		*		
20	1		*		
21	1		*		
22	1		*		
23	1		*		
24	1		*		
25	1		*		
26	1		*		
27	1		*		
28	1		*		
29	1		*		
30	1		*		
31	1		*		
32	1		*		
33	1		*		
34	1		*		
35	1		*		
36	1		*		
37	1		*		
38	1		*		
39	1		*		
40	1		*		
41	1		*		
42	1		*		
43	1		*		
44	1		*		
45	1		*		
46	1		*		
47	1		*		
48	1		*		
49	1		*		
50	1		*		
51	1		*		
52	1		*		
53	1		*		
54	1		*		
55	1		*		
56	1		*		
57	1		*		
58	1		*		
59	1		*		
60	1		*		
61	1		*		
62	1		*		
63	1		*		
64	1		*		
65	1		*		
66	1		*		
67	1		*		
68	1		*		
69	1		*		
70	1		*		
71	1		*		
72	1		*		
73	1		*		
74	1		*		
75	1		*		
76	1		*		
77	1		*		
78	1		*		
79	1		*		
80	1		*		
81	1		*		
82	1		*		
83	1		*		
84	1		*		
85	1		*		
86	1		*		
87	1		*		
88	1		*		
89	1		*		
90	1		*		
91	1		*		
92	1		*		
93	1		*		
94	1		*		
95	1		*		
96	1		*		
97	1		*		
98	1		*		
99	1		*		
100	1		*		

ENGINEERING NOTES:

- 51-MAXIMUM EXTERNAL-CIRCUIT RESISTANCE: 1500 OHMS IF SUBSCRIBERS DIAL DIRECTLY; 1700 OHMS IN REGISTER-SENDER OFFICE.
- 52-FACTORY STRAPS CONNECTORS WITH THE "STANDARD FIGURE 1A WIRING" SHOWN IN TABLE A. IF THIS WILL NOT GIVE THE SERVICE OR CONTROL REQUIRED, SELECT ONE OPTION FROM TABLE A, AND INSTRUCT INSTALLER TO RE-STRAP CONNECTORS ACCORDINGLY.
- 53-BANKS MUST NOT BE CONNECTED TO LINE EQUIPMENTS WITH "MECHANICAL LOCKOUT" RELAYS D-817722.
- 54-INTERCEPTING CIRCUITS MUST TRIP RINGING, NOT WITH RESISTOR, BUT WITH NEON TUBE.

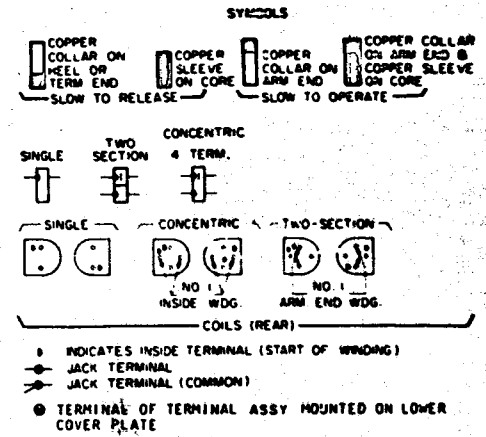

MANUFACTURING NOTES:

- 1-CAPACITANCES OF CAPACITORS C1 AND C2 MATCH WITHIN 5%.
- 2-ROTARY OFF-NORMAL SPRINGS OPERATE DURING FIRST ROTARY STEP.
- 3-WHEN RELAYS OPERATE, CONTACT "X" CLOSE FIRST.
- 4-NETWORK "NLN" TERMINAL -1 IS TERMINAL NEAREST MOUNTING PLATE.
- 5-WHEN SWITCH IS REMOVED FROM SHELF, SHELF-JACK SPRINGS 9 AND 11 MAKE CONTACT.

INSTALLING NOTES:


- 76-IF THERE IS NO SEPARATE RINGBACK-TONE LEAD, AT END OF SHELF CONNECT JACK POINT 5 TO JACK POINT 20.
- 77-IF LAST-PARTY RELEASE IS USED, ADD WIRE FROM SHELF-JACK-4 MULTIPLE TO SHELF LAMP "SUPY2".

CURRENT DRAIN DATA
HOLDING CURRENT
AMPS
0.30



STOCKLIST DH-500361-B3 (FIG. 2A)
MFG. NO. STOCKLIST DH-500361-B30 P16 W16
JUMPER LIST JL-500361-B

ASSOCIATED DRAWINGS		
DRAWING NO	ISS	DESCRIPTION
AM-500361-B	9	ADJUSTMENT
E-500361-B	2	EXPLANATION

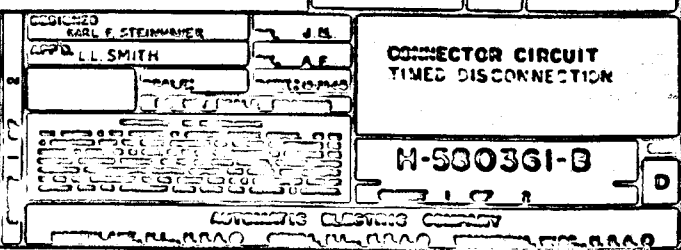

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

NAFM→FIG. 1A ("E" WIRING & APP.)

