

SERVICE

636A, B, C AND 637A, B, C, D TELEPHONE SETS

1. GENERAL

1.01 This section contains connection and maintenance information for 18- and 30-button general purpose CALL DIRECTOR® telephone sets equipped with headset jacks.

1.02 This section is reissued to:

- Change title of section from 636- and 637-type telephone sets
- Show that all codes of these telephone sets are now MD
- Show 599H and 657H keys MD, replaced by 657L key
- Add modification table, Fig. 6
- Add information on T1A ringer, Fig. 1 and change 241A amplifier to 241-type
- Remove common maintenance information which is now covered in Section 502-600-100.

1.03 These sets are not intended for use with 3-type speakerphone systems.

2. CONNECTIONS

2.01 These sets are factory-wired for use with 1A1, 1A2, or 6A KTS line circuits. They may also be used with 1A KTS line circuits by modifying the set as shown in Table A. Line circuits for 1A, 1A1, or 1A2 KTS may be connected to the same set under the following conditions:

- (a) 1A1 or 1A2 KTS lines must be connected to the first key units with 1A lines connected to supplementary key modules.
- (b) 1A, 1A1, or 1A2 KTS lines should not be connected to the same 6 line key module.
- (c) 1A, 1A1, or 1A2 KTS lines appearing behind a manual switchboard should not be

intermixed at a CALL DIRECTOR telephone set due to the different time out intervals provided by the associated KTU's.

2.02 These 636- and 637-type (MD) rotary dial telephone sets are equipped with 517A jacks for the plugs of a G3L handset or a head telephone set. The internal wiring is arranged to electrically connect either the line switch or the headset jacks to the line.

2.03 Replacement or substitution of the key in the first module may require wiring changes as shown in the notes for Fig. 3 and 4.



Some spade-tipped conductors or mounting cord leads are insulated with tubing which should be cut off with electrician scissors or diagonal pliers. Other conductors are insulated with stiff plastic pockets. Pinch open the pocket to release the spade tips.

2.04 When station busy lamp feature is required with these sets having 1A1 or 1A2 KTS line circuits, a P-90D033 Printed Wiring Board Assembly must be ordered separately and installed in the 636- or 637-type telephone set. With this option, the busy lamp will light whenever a line pickup button is depressed and the handset is off-hook or the headset is plugged into the jack. See Fig. 6 for connections and Section 502-600-100 for installation procedures.

2.05 Sets equipped with a D120C mounting cord manufactured prior to III-68 must use circuit per Fig. 6 to provide station busy lamp feature.

2.06 ♦The tip and ring leads of lines wired for supplementary hold feature must be run directly between the key telephone equipment and key telephone set. The A and lamp leads can be routed per SD-69530-01 and Division 518.♦

Supplementary hold can be furnished in either of the following arrangements:

◆(a) **Priority Hold:** Replace the 599- or 657-type key in the first module with a 599H (MD) or 657L key which is equipped with a second hold button and wire per Fig. 8 or 9 to transfer the A lead from ground to -24 volts.◆

(b) **I Hold:** Wire present Hold key to transfer A lead from ground to -24 volt; connect stored (BR-V) [S-Y] Hold lead from first module plug to any spare mounting cord lead using spare terminal or D-161488 connector. Mounting cord lead becomes SP lead at key equipment.

2.07 To convert a key position from pickup (locking) to signal (nonlocking) remove the


screw detail P-10E837 entirely from plunger at the key position to be converted. Make the necessary wiring changes as shown in Table B.

2.08 ◆A 657B or 599B key (turnbutton) may be used in the first module for cutoff control of ringer or line. Refer to Note 1 (Fig. 4 and 5) and Table C for necessary wiring changes.◆

3. MAINTENANCE

3.01 Maintenance of handset, dials, ringers, and modular keys is outlined in sections covering these components located in Division 501.

3.02 ◆Refer to Section 502-600-100 for common installation and maintenance information for these CALL DIRECTOR telephone set.◆

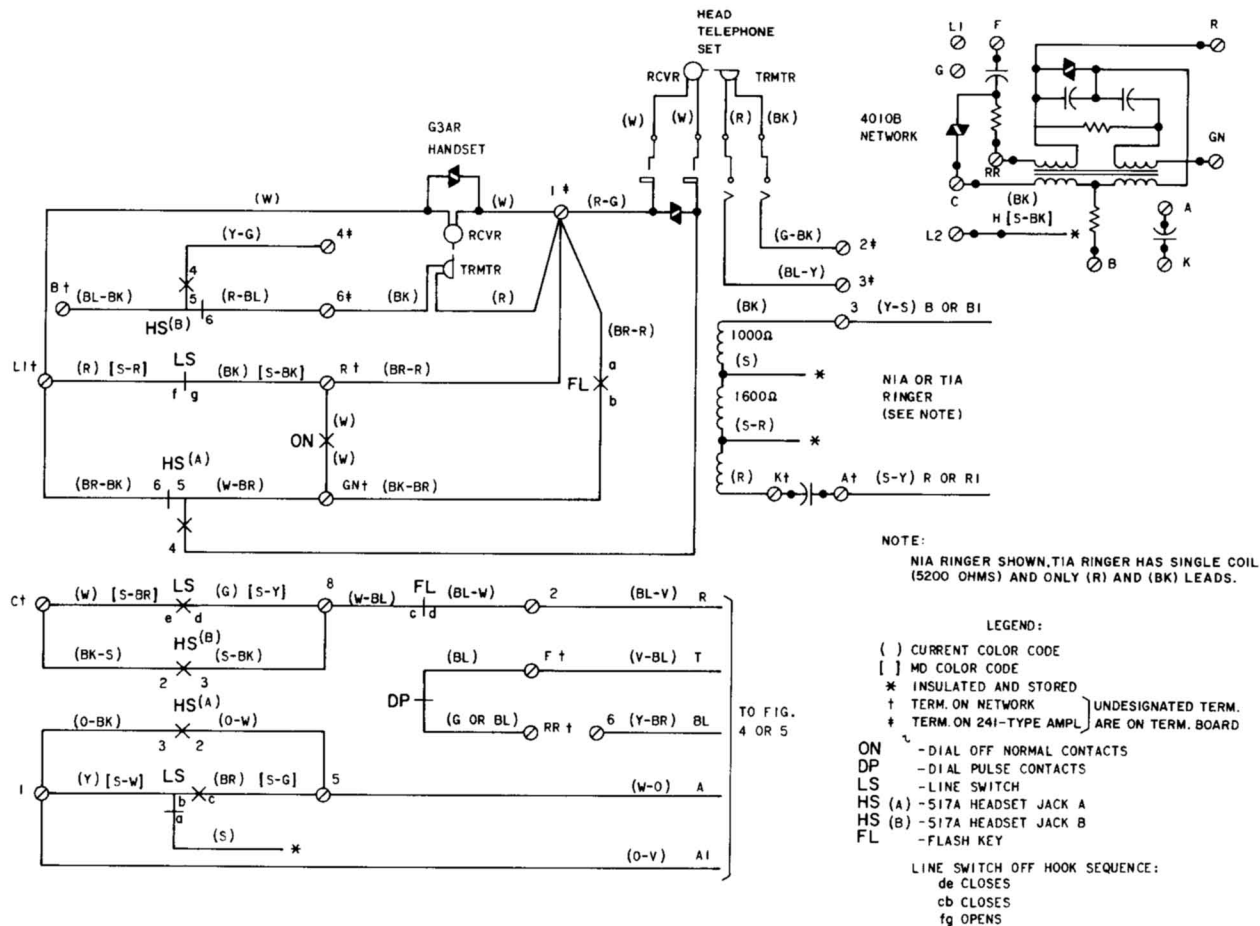

♦ Fig. 1—Current 636- and 637-Type (MD) Telephone Set, Connections ♦

NOTE:

LINE SWITCH OFF-HOOK SEQUENCE:

de - CLOSSES

cb - CLOSSES

fg - OPENS

() CURRENT COLOR CODE

[] MD COLOR CODE

* INSULATED AND STORED

† TERM. ON NETWORK

‡ TERM. ON TERM. BOARD 2

UNDESIGNATED
TERMS. ARE ON
TERM. BOARD 1

LEGEND:

ON - DIAL OFF NORMAL CONTACTS

DP - DIAL PULSE CONTACTS

LS - LINE SWITCH

HS(A) - 517A JACK A

HS(B) - 517A JACK B

FL - FLASH KEY


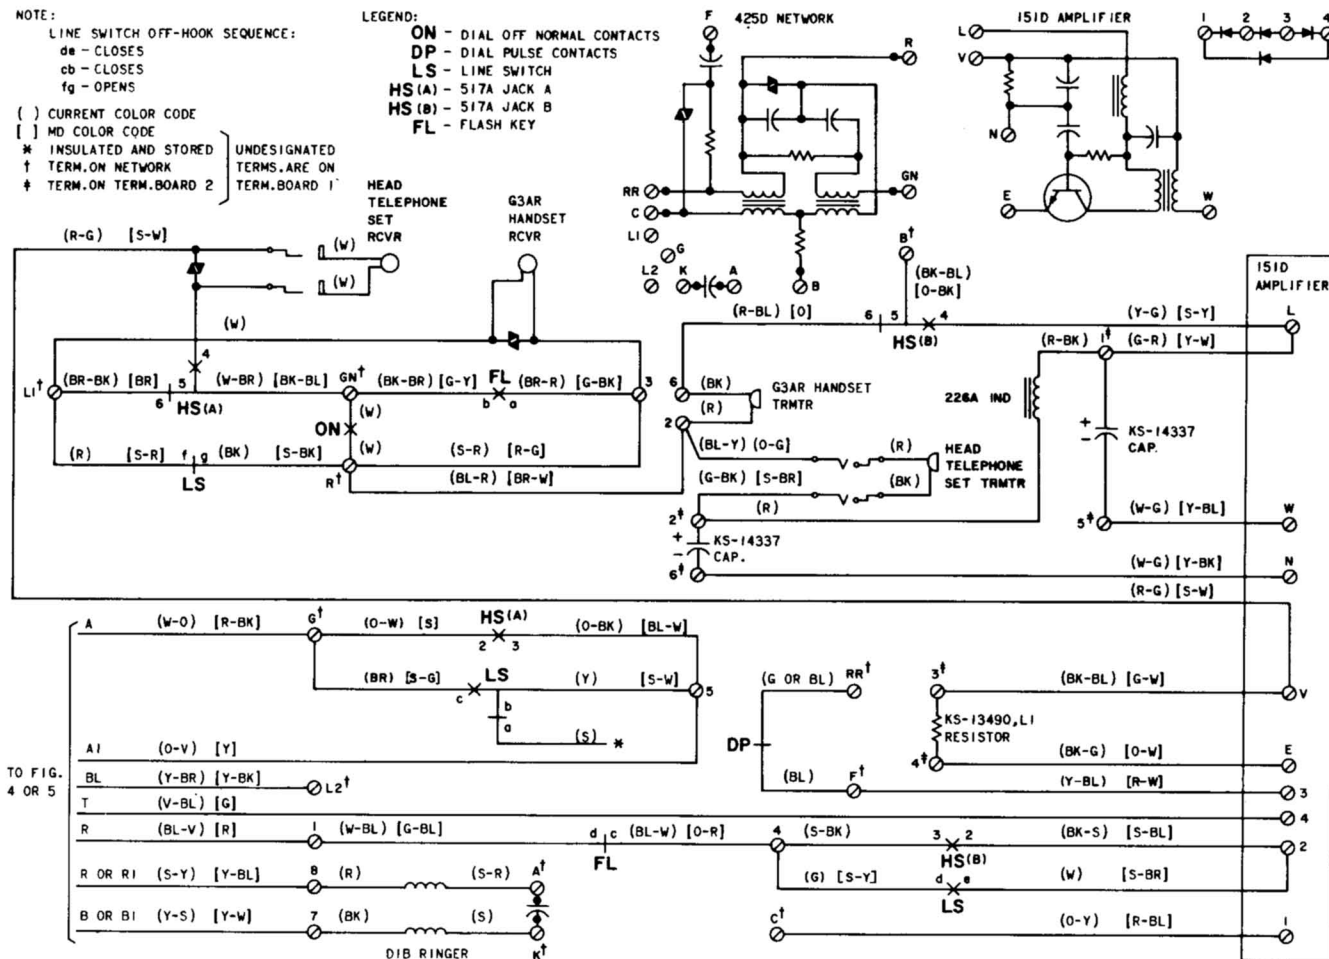


Fig. 2—Early 636- and 637-Type (MD) Telephone Set, Connections

ON	DIAL OFF NORMAL CONTACTS
DP	DIAL PULSE CONTACTS
LS	LINE SWITCH
HS (A)	517A JACK A
HS (B)	517A JACK B
FL	FLASH KEY





NOTES:

1. IF 598A OR 657A KEY IN FIRST MODULE, STRAP-TIPPED LEADS FROM KEY PLUG 1 AND MOUNTING CORD BINDER GROUP (BL-W) ARE INSULATED AND STORED AS SHOWN.

WITH 598B OR 657B KEY IN FIRST MODULE, (BR-BK) LEAD MUST BE REMOVED FROM A-H OF TB2, INSULATED AND STORED.

WITH 598A OR 656A KEY IN FIRST MODULE, STRAP A-H OF TB2 TO TERMINAL 6 ON NETWORK CONNECT (Y-O) AND (BR-BK) LEADS FROM KEY PLUG 1 TO A-H OF TB2.

TO EXTEND HOLD LAMP LEADS CONNECT (S-V) AND (Y-S) KEY PLUG LEADS TO (G-Y) AND (Y-B) MOUNTING CORDS LEADS RESPECTIVELY USING SPARE TERMINALS OR D-161488 CONNECTORS.

2. FOR USE WITH 1A KEY SYSTEM ONLY, MOVE A1 (O-V) STRAP FROM 18 TO 5G ON TB2E AND MAKE CONVERSION SHOWN IN TABLE A.


3. FOR ADD-ON CONFERENCE CONTROL IN THE 6A KEY TELEPHONE SYSTEM, CONNECT (BR-V) MOUNTING CORD LEAD (O-W BINDER GROUP) TO TB2E-19. ALSO REMOVE COMMON LEAD OF ADD-ON CONFERENCE BUTTON (CONVERTED TO SIGNALING) FROM A-H TERMINAL AND CONNECT TO PB. THE 617A KEY MAY ALSO BE USED IN A SIMILAR MANNER, ALSO SEE NOTE 4.

4. WHEN THE 617A KEY IS REQUIRED AS A DUAL-PURPOSE KEY, THE BRASS STRAP BETWEEN THE 51 AND 56 TERMINALS OF THE KEY MAY BE REMOVED. USE M/W CORD OR EQUIVALENT TO CONNECT 51 TERMINAL OF 617A KEY TO A DISSEMBLAR GROUND OR A NONGROUNDED CIRCUIT.

5. WHEN INSTALLING P-900033 PRINTED WIRING BOARD ASSEMBLY TO PROVIDE STATION BUSY LAMP FEATURE IN 1A1 OR 1A2 KTS, CONNECT A OR H LEAD (S-V) FROM LAST MODULE TO TERMINAL X OF TB2E.

6. INSULATED AND STORED
U-25000 SHED

617A KEY
2ND MODULE
(636-TYPE SETS)
4TH MODULE
(637-TYPE SETS)

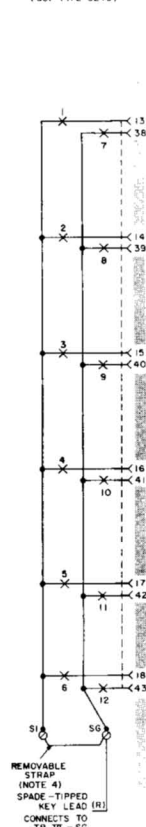

598A OR 656A KEY
2ND MODULE (636-TYPE SETS)
2ND, 3RD OR 4TH MODULE
(637-TYPE SETS)

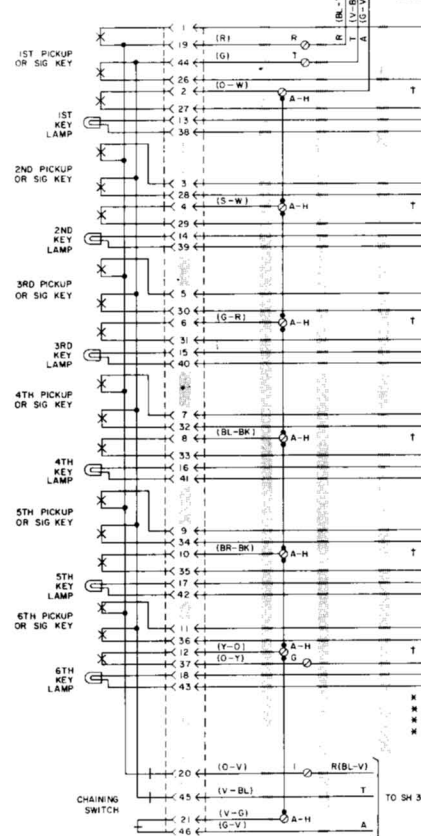


Fig. 4—Module Arrangements and Cord and Cable Connections for Sets Equipped with Even-Count Color-Code Cords (Sheet 2 of 3)



TABLE A — WIRING MODIFICATIONS FOR COMBINING 1A AND 1A1 OR 1A2 KTS LINES

KEY TELEPHONE SYSTEM	MOUNTING CORD LEADS (NOTE 1)												SET LINE SWITCH
	HOLD KEY					CHAINING SWITCH					TEL SET CONTROL (NOTE 2)		
						18- AND 30-BUTTON SETS			30-BUTTON SETS ONLY				
						1ST KEY	2ND KEY	3RD KEY	4TH KEY	5TH KEY			
	(Y-G) [BK-BL]	(G-Y) [BK-W]	(V-O) [S-W]	(BR-V) [S-Y]	(V-BR) [S-BK]	(V-G) [BL-W]	(V-G) [BL-W]	(V-G) [BL-W]	(V-G) [BL-W]	(V-G) [BL-W]	(BL-V) [R]	(O-Y) [Y]	
1A1 or 1A2 (shop wiring)	A-H (I)	A-H (I)	*	*	*	A-H (I)	A-H (II)	A-H (III)	A-H (IV)	A-H (V)	R (I)	1B (Note 4)	†
1A1 or 1A2 on first key unit; 1A on remaining key units	A-H (I)	Y (Note 4)	*	1‡ (I)	R (II)	(Y) (Note 4)	A-H (II)	A-H (III)	A-H (IV)	A-H (V)	R (I)	1B (Note 4)	†
1A1 or 1A2 on first and second key units; 1A on remaining key units	A-H (I)	Y (Note 4)	*	1‡ (II)	R (III)	A-H (I)	Y (Note 4)	A-H (III)	A-H (IV)	A-H (V)	R (I)	1B (Note 4)	†
1A1 or 1A2 on 1st, 2nd, and 3rd key units; 1A on remaining key units (30-button sets)	A-H (I)	Y (Note 4)	*	1‡ (III)	R IV	A-H (I)	A-H (II)	(Y) (Note 4)	A-H (IV)	A-H (V)	R (I)	1B (Note 4)	†
1A1 or 1A2 on 1st through 4th key units; 1A on fifth key unit (30-button sets)	A-H (I)	Y (Note 4)	*	1‡ (IV)	R (V)	A-H (I)	A-H (II)	A-H (III)	Y (Note 4)	A-H (V)	R (I)	1B (Note 4)	†
1A only (See Note 2, Fig. 4 or 5)	Y (Note 4)	A-H (I)	*	R1 (VI)	R (I)	A-H (I)	A-H (II)	A-H (III)	A-H (IV)	A-H (V)	R1 (Note 4)	SG (Note 4)	6 (Note 5)

* Indicates lead is spade-tipped; insulate and store.

† (BR) [S-G] line switch lead connects to terminal 5 of telephone set terminal board (terminal G of network for MD color code) when station busy circuit is not provided and to terminal 9 of telephone set terminal board when station busy lamp circuit (P-90D033 printed wiring board assembly) is provided (1A1 or 1A2 KTS only).

‡ Disconnect, insulate, and store (BL-V) chaining switch lead at this terminal.

() Current color code.

[] MD color code.

Notes:

1. Mounting cord lead colors in parentheses are in D120C or D200F even count cord; mounting cord lead colors in brackets are in D120B (MD) or D200B (MD) cord.
2. Ring (BL-V) [R] lead connects to (G) [S-Y] line switch lead through flash key contacts and terminals 2 and 8 of telephone set terminal board (even count color code) or terminals 1 and 4 of telephone set terminal board (MD color code). A1 (O-V) [Y] lead connects to (Y) [S-W] line switch lead at terminal 1 (even count color code) or terminal 5 (MD color code) of telephone set terminal board.
3. Roman numerals in parentheses indicate terminal board designations.
4. Terminal on terminal board VI.
5. Terminal on telephone set terminal board (VII).

NOTES: ASSOCIATED WITH FIG. 5

1. WITH 599A OR 657A KEY IN FIRST MODULE; SPADE TIPPED LEADS FROM KEY PLUG I AND MOUNTING CORD BINDER GROUP [W] ARE INSULATED AND STORED AS SHOWN.
WITH 599B OR 657B KEY IN FIRST MODULE; [G-BL] LEAD MUST BE REMOVED FROM A-H OF TBI, INSULATED AND STORED.
WITH 598A OR 656A KEY IN FIRST MODULE; STRAP A-H OF TBI TO TERMINAL G ON NETWORK.
CONNECT [S-BR] AND [G-BL] LEADS FROM KEY PLUG I TO A-H OF TBI.
TO EXTEND HOLD LAMP LEADS CONNECT [BR-Y] AND [BR-BK] KEY PLUGS LEADS TO [O-BL] AND [O-W] MOUNTING CORDS LEADS RESPECTIVELY USING SPARE TERMINALS OR D-161488 CONNECTORS.
2. FOR USE WITH 1A KEY SYSTEM ONLY, MOVE AI [Y] STRAP FROM IB TO SG ON TBVI AND MAKE CONVERSION SHOWN IN TABLE A.
3. FOR ADD-ON CONFERENCE CONTROL IN THE 6A KEY TELEPHONE SYSTEM, CONNECT [G-W] MOUNTING CORD LEAD (RED BINDER GROUP) TO TBVI-PB. ALSO REMOVE COMMON LEAD OF ADD-ON CONFERENCE BUTTON (CONVERTED TO SIGNALING) FROM A-H TERMINAL AND CONNECT TO PB. THE 617A KEY MAY ALSO BE USED IN A SIMILAR MANNER. ALSO SEE NOTE 4.
4. WHEN THE 617A KEY IS REQUIRED AS A DUAL-PURPOSE KEY, THE BRASS STRAP BETWEEN THE SI AND SG TERMINALS OF THE KEY MAY BE REMOVED. USE MIW CORD OR EQUIVALENT TO CONNECT SI TERMINAL OF 617A KEY TO A DISSIMILAR GROUND OR A NONGROUNDED CIRCUIT.
5. WHEN INSTALLING P-90D033 PRINTED WIRING BOARD ASSEMBLY TO PROVIDE STATION BUSY LAMP FEATURE IN 1A1 OR 1A2 KTS CONNECT A OR H LEAD [S-BL] FROM LAST KEY MODULE TO TERMINAL X OF TBVI. SEE FIG. 6.

* INSULATED AND STORED


DEAD ENDED

() CURRENT COLOR CODE

[] MD COLOR CODE



Page 11

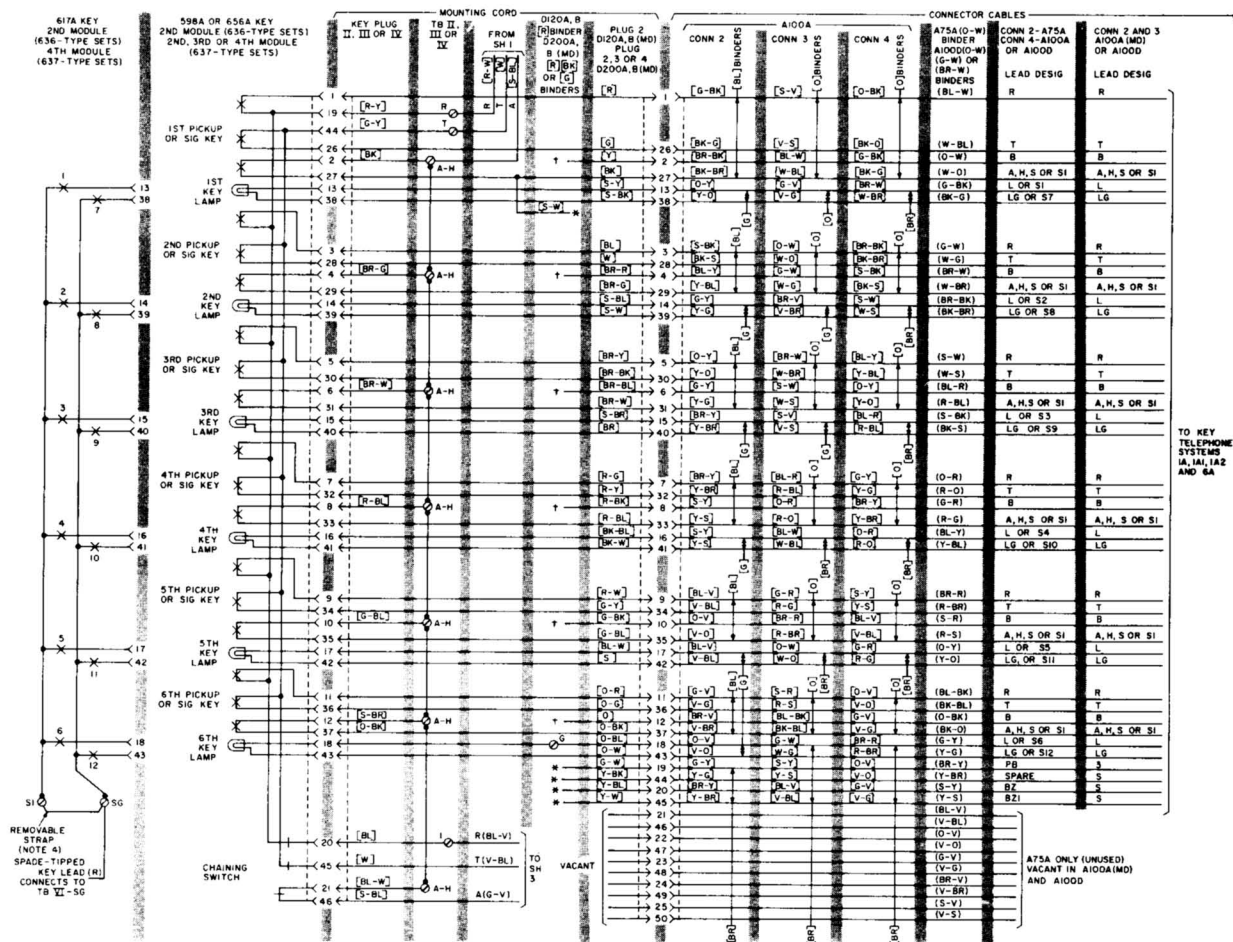

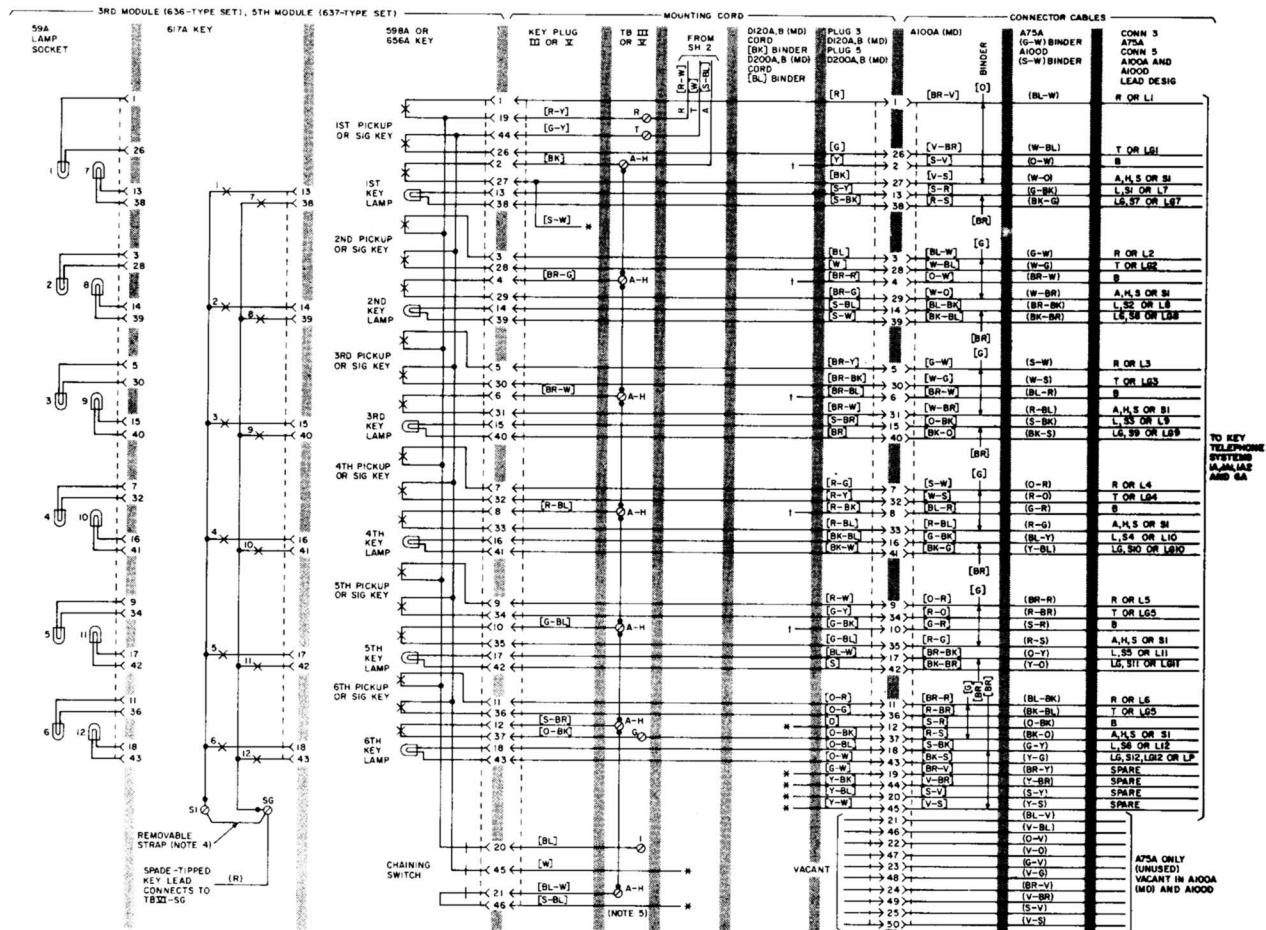


Fig. 5—Module Arrangement and Cord and Cable Connections for Sets Equipped with (MD) Mounting Cords
(Sheet 3 of 3)

◆ TABLE B ◆

PICKUP-SIGNAL KEY CONVERSION (3RD OR 5TH MODULE)

CONVERSION OPTIONS (NOTES)	598A OR 656A KEY						
	(O-W) [BK]	(S-W) [BR-G]	(G-R) [BR-W]	(BL-BK) [R-BL]	(BR-BK) [G-BL]	(Y-O) [S-BR]	(O-Y) [O-BK]
PPPPPP	A-H	A-H	A-H	A-H	A-H	A-H	G
PPPPPS	A-H	A-H	A-H	A-H	A-H	SG	G
PPPPSS	A-H	A-H	A-H	A-H	SG	SG	G
PPSSSS	A-H	A-H	A-H	SG	SG	SG	G
PPSSSS	A-H	A-H	SG	SG	SG	SG	G
PSSSSS	A-H	SG	SG	SG	SG	SG	G
SSSSSS	SG	SG	SG	SG	SG	SG	G
PPPP*P*S	A-H	A-H	A-H	C	C	5†	C
PPP*P*P*S	A-H	A-H	C	C	C	5†	C
PP*P*P*P*S	A-H	C	C	C	C	5†	C
P*P*P*P*P*S	C	C	C	C	C	5†	C

Notes:

1. Convert buttons on right hand key module first. If more than six (five with common signaling) are required use module preceding right hand position, repeat connection modifications as shown in table.
2. All key positions are arranged in the shop as pickup positions. To convert to signaling (nonlocking), remove the screw detail P-10E837 from the plunger at the key position to be converted. Make the necessary connection changes as shown in Table B.

* These arrangements use line switch controlled ground for common signal key used with private or intercommunicating lines. Common signal should be used to operate a signal relay. Do no wire directly to a buzzer.

† Terminal G in early sets.

() Current color code.

[] MD color code.

TABLE C

599B (TURNKEY) KEY CONNECTIONS

FEATURE		FIRST MODULE KEY LEADS						SPADE-TIPPED LEADS OF MOUNTING CORD				
		5TH			6TH							
		R	T	A	R	T	A					
		(G-BK) [R-W]	(BK-G) [G-Y]	(BK-BR) [G-BL]	(BL-Y) [O-R]	(Y-BL) [O-G]	(Y-O) [O-BK]	(BL-Y) [O-R]	(Y-BL) [O-G]	(O-Y) [O-BK]	(Y-O) [S-BR]	(BR-BK) [G-BL]
Cutoff sta on 1A1 or 1A2 sys		To KTS Equip		To Ext Sta		Insulate and store						
Cutoff sta on 1A sys without hold feature		To KTS Equip		To Ext Sta		Insulate and store						
Cutoff station on 1A system with hold feature		To Aux Relay used to cut off T, R, B, and H				Insulate and Store			SG*	SG*		
Cutoff external ringer or buzzer		To KTS Equip		To Ext Ringer or Buzzer		Insulate and Store						
Cutoff ringer in set (Note 1)		To KTS Equip				3† (Note 2)	A† (Note 2)	Insulate and Store				
Cutoff Buzzer in Set (Note 1 and 2)	AC Buzzer	To BZ and BZ1 at KTS Equip				A	C	Insulate and Store				
	DC Buzzer					D	C					
	Com. Audible					Cap.	C					
Monitoring		To MON Equip				R TBI	T TBI					

* Terminal on TBVI.

† Terminal on telephone set terminal board.


‡ Terminal on set network.

() Current color code.

[] MD color code.

Notes:

1. Insulate and store BZ and BZ1 leads at buzzer or telephone set terminal board.
2. The (BL-Y) [O-R] and (Y-BL) [O-G] mounting cord leads should be insulated and stored at the equipment end when the bridged spade-tipped leads are used in the set.

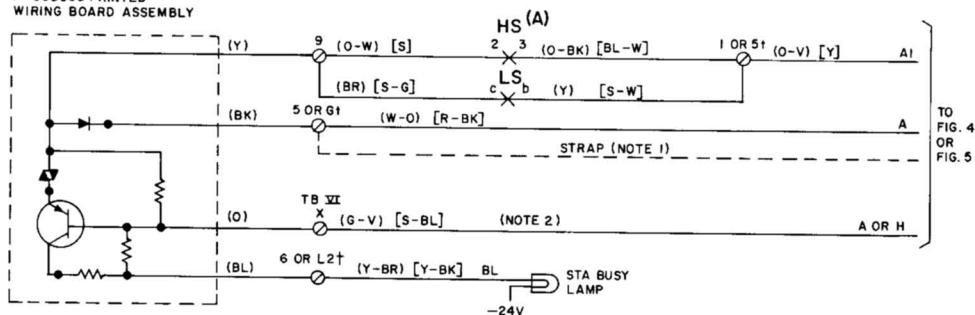P-900033 PRINTED
WIRING BOARD ASSEMBLYTO
FIG. 4
OR
FIG. 5

NOTES:

1. WITH 598A OR 656A KEY IN FIRST MODULE
EXTEND "A" LEAD FROM TBI TERM 5
ON CURRENT SETS OR NETWORK TERM. G
ON EARLY SETS.
 2. FROM LAST MODULE.
- () CURRENT COLOR CODE
[] MD COLOR CODE

* STORED LOCATION

† NETWORK TERMINAL, EARLY PRODUCTION SETS ONLY.

LEGEND

HS(A) — HEADSET JACK A

LS — LINE SWITCH

MODIFICATION			
WIRE OR LEAD	COLOR	REMOVE FROM	CONNECT TO
P-900033 PRINTED WIRING BOARD	(Y) (BK) (O) (BL)		TB VII-9 5 OR G† TB VI-X 6 OR L2†
HEADSET JACK (A)	(O-W) [S]	5 OR G†	TB VII-9
LINE SWITCH	(BR) [S-G]	5 OR G†	TB VII-9
CHANNING SWITCH (LAST MODULE)	(G-V) [S-BL]	*	TB VI-X

♦ Fig. 6—Station Busy Lamp Circuit Using Printed Wiring Board Assembly ♦



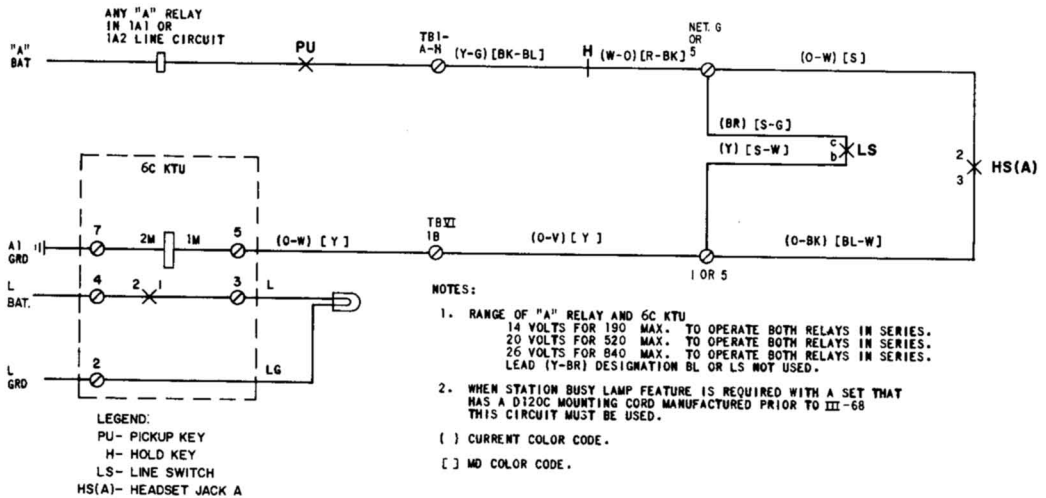


Fig. 7—Busy Lamp Control Circuit with 6C KTU

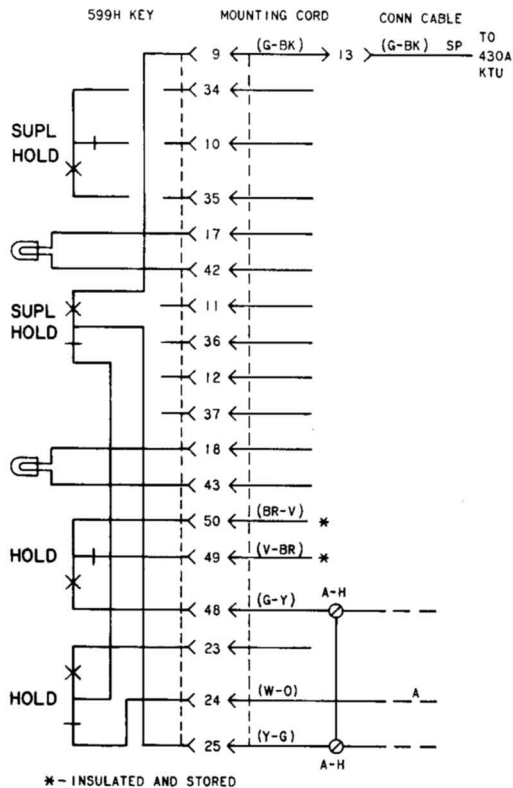

♦ Fig. 8—Priority Hold, Using 599H Key ♦

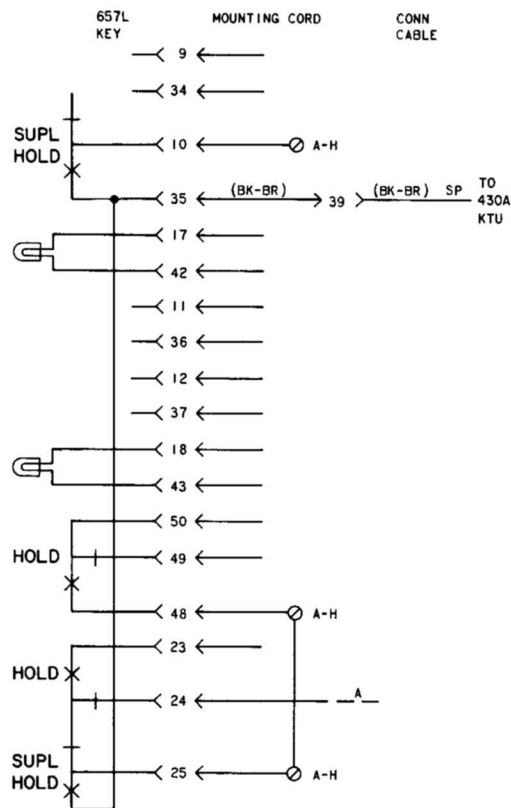

♦ Fig. 9—Priority Hold, Using 657L Key ♦