

## HAND TELEPHONE SETS — 201A, B, C, D

### HANGUP TYPE — COMMON BATTERY — CONNECTIONS WITH INDUCTION COIL TYPE SUBSCRIBER SETS

#### 1.00 INTRODUCTION

This section covers the combination of apparatus, circuit diagrams, and connections for the 201A,B,C, and D hang-up type hand telephone sets when used with the induction coil types of subscriber sets for manual or dial common battery service.

#### 2.00 GENERAL

2.01 The 201A,B,C, and D types may be used for all classes of service except in dial central offices where the party-on-tip station of 2-party service requires a message rate or tip party identification feature.

2.02 The 201B and D are the same as the 201C with the exception of the type dial number plate furnished. The 201C has the standard dial number plate with black letters and red numerals.

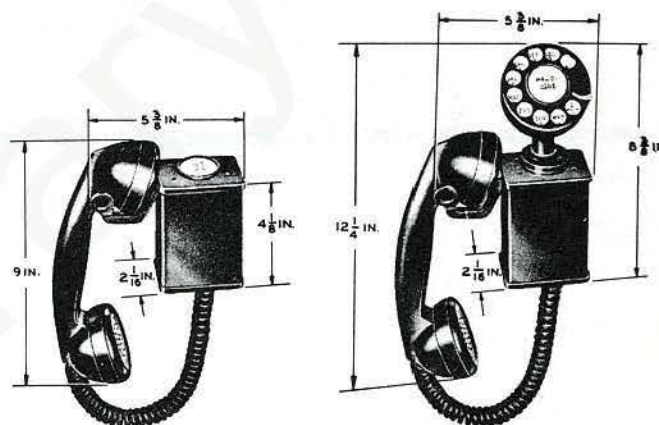


FIG. 1—201-TYPE MANUAL FIG. 2—201-TYPE DIAL

N.B - Page 3 is the fold out portion of page 2. They were designed to be viewed as one drawing. In order to do that, place the right edge of page 2 up against the left side of page 3 and align the drawings accordingly.

TABLE A  
COMBINATION OF APPARATUS

Hand Tel. Set Code	Components				
	Handset	Handset Mounting	Dial or Apparatus Blank	Dial Mounting	Type Handset Cord
201A-3E (As furnished)	E1E-3	C1-3	Number Card Holder	—	H3
201A-3F (As furnished)	F1A-3 F1G-3				
201A-3F (Modified)	F4A-3				
201C-3E (As furnished)	E1E-3		4H or 5H	39A-3	
201C-3F (As furnished)	F1A-3 F1G-3		5H or 6A		
201C-3F (Modified)	F4A-3		5H or 6A		

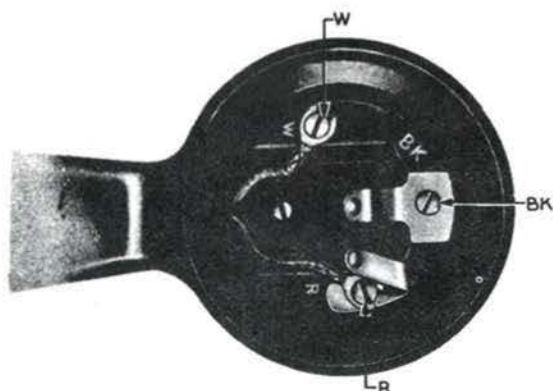


FIG. 3—F1-TYPE HANDSET

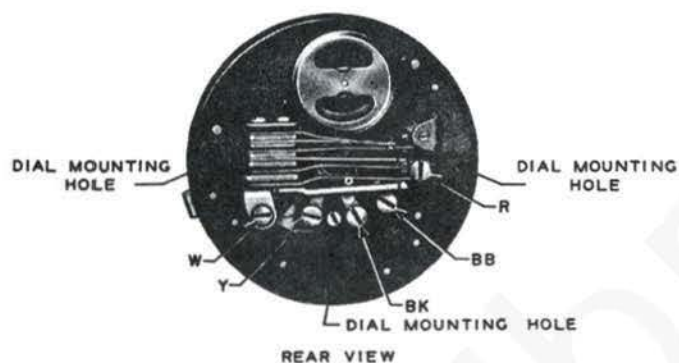


FIG. 4—5H-TYPE DIAL




FIG. 5—6A-TYPE DIAL

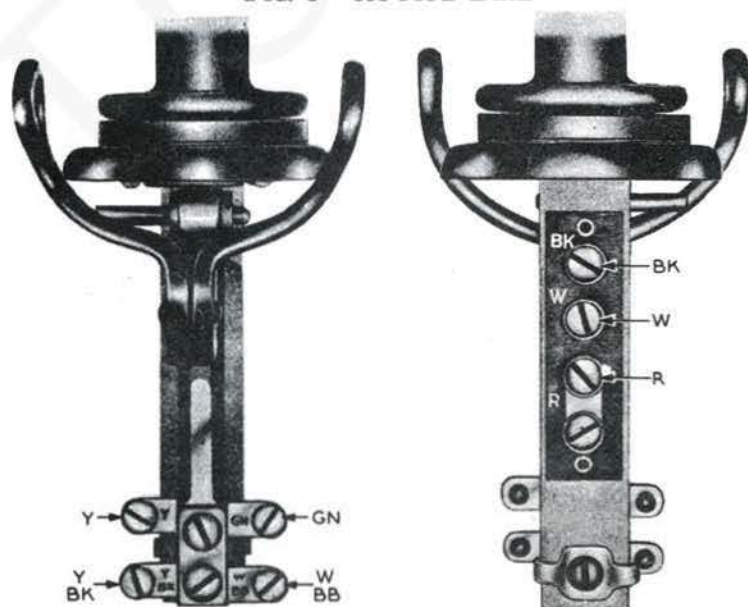



FIG. 6—C1-TYPE HANDSET MOUNTING

## ASSOCIATED APPARATUS

TABLE B	Class of Service	Sub.Set
	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634A, BA 684A, BA
	4-Party Full Selective 8-Party Semiselective	634AT
*No message rate or tip party identification can be provided for party-on-tip stations.		
TABLE C	Class of Service	Sub. Set
	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634BC 684BC
	*No message rate or tip-party identification can be provided for party-on-tip stations. Use only where the additional pair (R and Y) is not required in the Sub. Set.	
TABLE D	Class of Service	Sub. Set
	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634CE
	*No message rate or tip-party identification can be provided for party-on-tip stations. Use only where the additional pair (R and Y) is not required in the Sub. Set.	



## 3.00 CIRCUIT DIAGRAMS

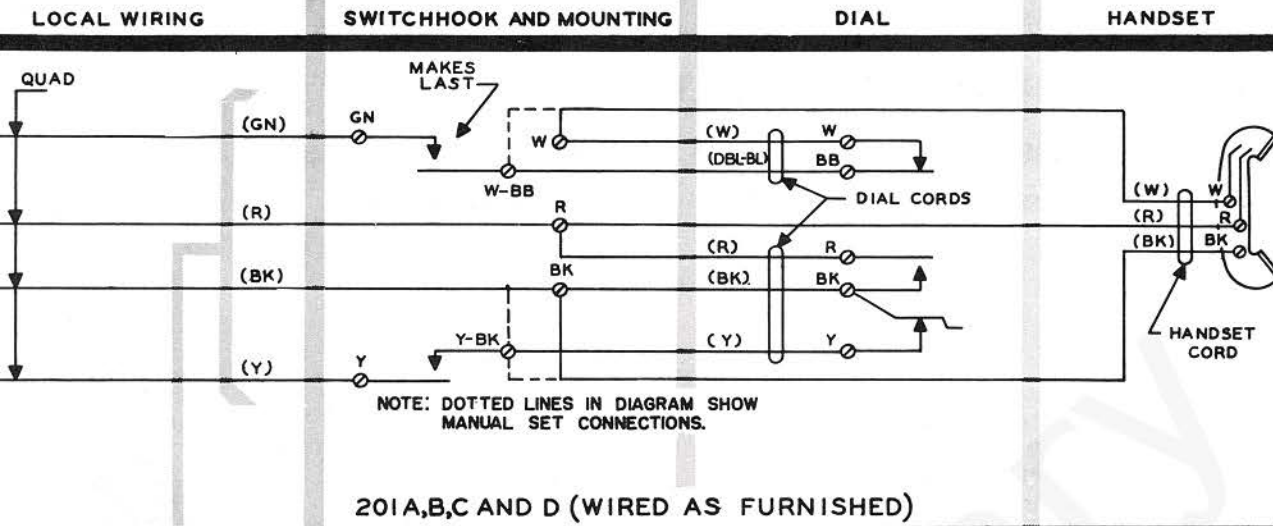

3.01 The 201-type set is arranged for, but not equipped with, a 61G filter for radio-frequency suppression. When this filter is required, remove the yellow dial lead from the Y-BK mounting contact and connect to the filter bracket terminal. Connect filter as shown in Fig. 7.

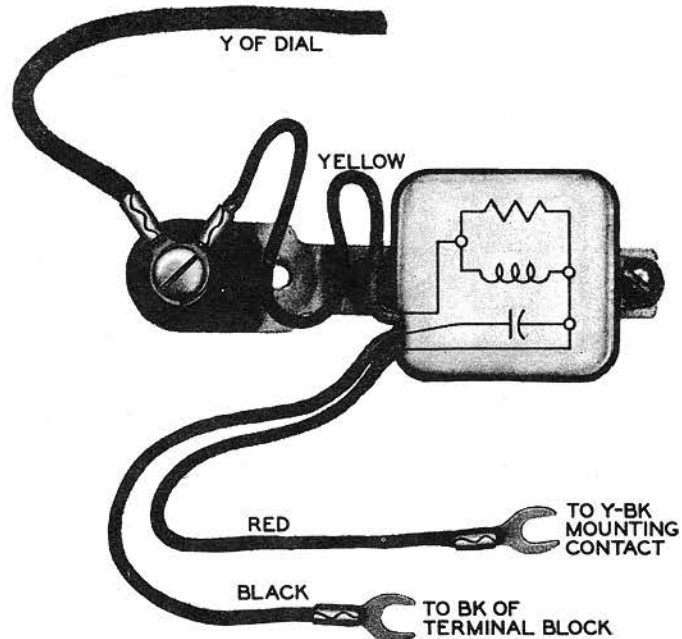
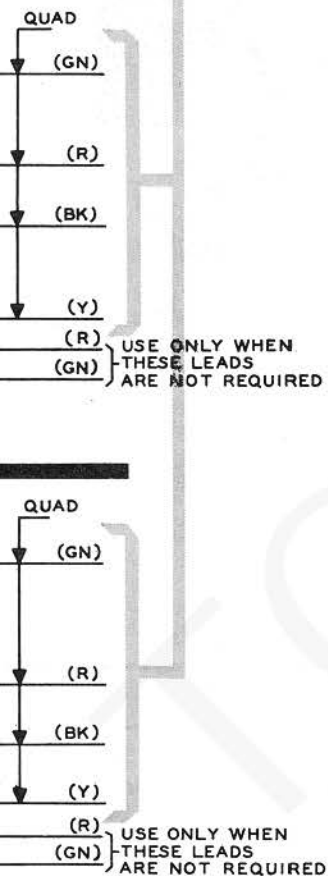


FIG. 7—61G FILTER CONNECTIONS