
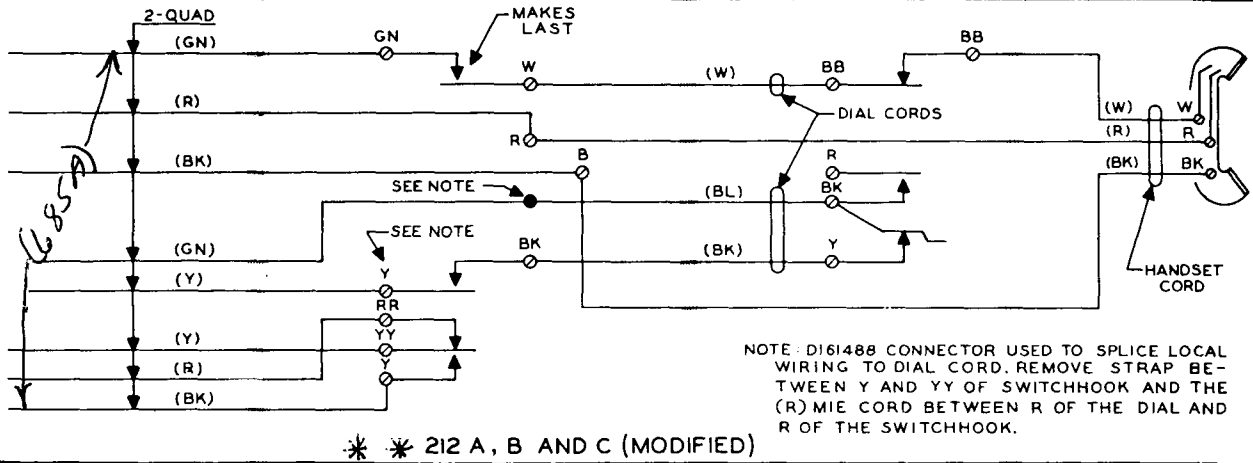


HANGUP TYPE — COMMON BATTERY — CONNECTIONS
WITH NETWORK TYPE SUBSCRIBER SETS

TABLE A
COMBINATION OF APPARATUS

Hand Tel. Set Code	Components				Handset Cord
	Handset	Handset Mounting	Dial or Apparatus Blank	Dial Mounting	
Modified					
212C-3E	E1E-3	G2-3	Number Card Holder	—	H-3
212C-3F	F1A-3 F1G-3				
212C-3F	F4A-3				
212C-3E	E1E-3		4H or 5H	43A-3	
212C-3F	F1A-3 F1G-3		5H or 6A		
212C-3F	F4A-3		5H or 6A		

3.00 CIRCUIT DIAGRAMS

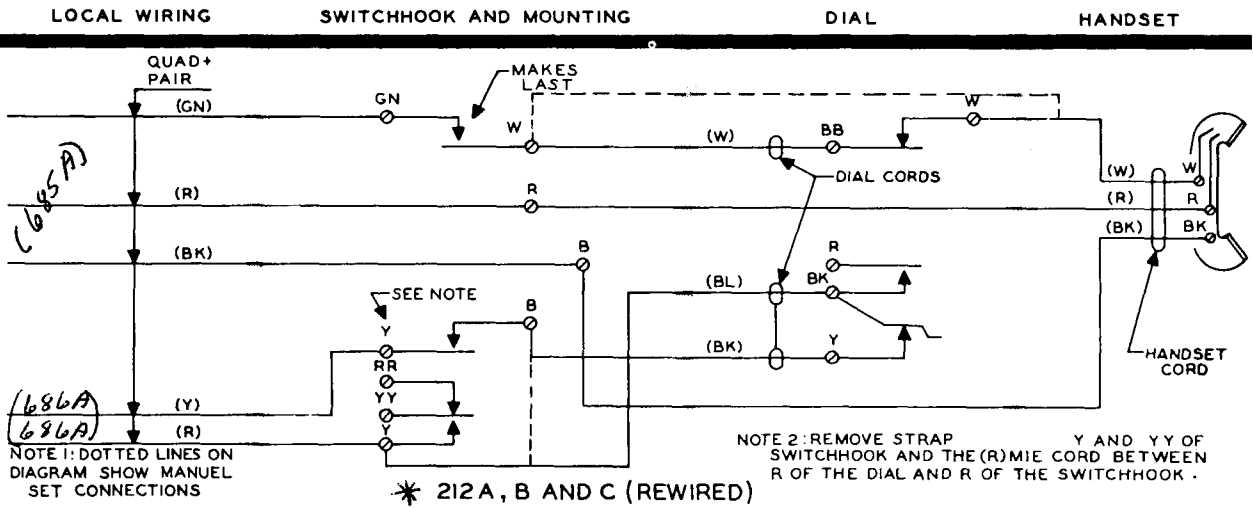

ASSOCIATED APPARATUS

TABLE B *	Class of Service	Sub. Set
	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	685A
	4-Party Full Selective 8-Party Semiselective	686A
	*No message rate or tip party identification can be provided for party-on-tip stations.	

TABLE C *	Class of Service	Sub. Set
	2-Party Flat Rate 2-Party Message Rate Where message rate or tip party identification is required for party-on-tip stations, both 1000- and 2050-ohm tip-to-ground resistance can be provided, i.e., MR —All offices AMA—Mod. X-bar ZR —All offices AMA—SxS AMA—Std. X-bar AT —SxS	685A
	May also be used for these classes of service: Individual Lines 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	

3.01 The 212-type set is arranged for, but not equipped with, a 61M filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the switchhook and connect filter as shown in Fig. 6.