


## SERVICE

### 511A/B TELEPHONE SETS

#### 1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1.

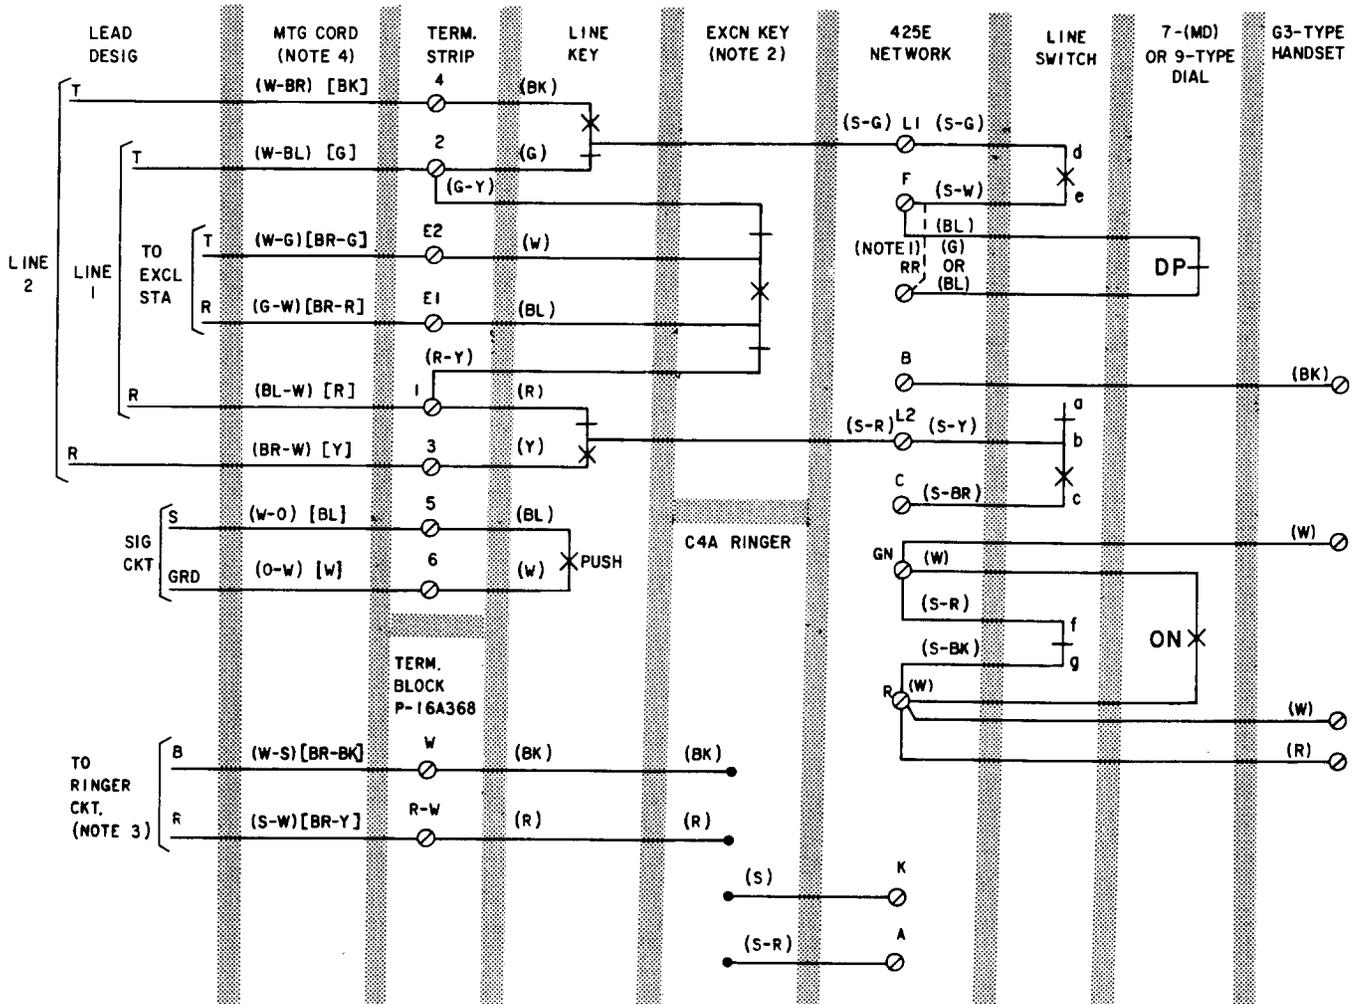

**NOTES:**

1. DASHED LINE INDICATES MANUAL SET CONNECTIONS.
2. FOR EXCLUSION ON LINE 2, CONNECT (R-Y) AND (G-Y) EXCLUSION KEY LEADS TO TERMINALS 3 AND 4, RESPECTIVELY.
3. FOR RINGER CONNECTIONS, TERMINATE (W-S) OR [BR-BK] AND (S-W) OR [BR-Y] MOUNTING CORD LEADS TO LINE 1 OR 2 AT CONNECTING BLOCK.
4. EARLY MODEL SETS ARE EQUIPPED WITH DIOF OR DIOH(MD) MOUNTING CORD AND CURRENT MODEL WITH DIOP.

- ( ) CURRENT COLOR CODE  
[ ] MD COLOR CODE  
DP- DIAL PULSE  
ON- OFF NORMAL  
LINE SWITCH SEQUENCE:  
bc- MAKE    ab- BREAK  
de- MAKE    fg- BREAK

◆Fig. 1—511A/B (MD) Telephone Set, Connections◆