

TELEPHONE SETS 592 TYPE CONNECTIONS AND CORDING

This index lists the information that forms a part of, or supplements this specification, and indicates the authorized issues thereof.

[illegible]

a- No longer required

b—The D Series Bell System Practice of the same number shall be used until the BSRs is available.

c—Information in accordance with that currently authorized.

1. GENERAL


- 1.01 This specification covers the connections and cording for 592-type telephone sets. ←

2. CONNECTIONS AND CORDING

- 2.01 Connections for the 592-type telephone sets shall be in accordance with drawing LA-540264. ↙
- 2.02 Cording for the 592-type telephone sets shall be in accordance with drawing LA-540265. ↙

A-

DESIGNED BY	W. SANDER	C.R.S.	C.R.S.
DRAWN BY	S. BARRETT	C.L.B.	C.L.B.
ISSUE 1	11-15-54	OK	OK
CHANGED: IN RIGHT VIEW LEAD FROM TERM 18 TO "ON" KEY & FROM TERM 14 TO "OFF" KEY WERE ITEM 4.			
ISSUE 4	7-17-55		
CHANGED: IN VIEW FROM UNDER SIDE, POT. TO AGREE WITH LP-14254, ISS. 5. TERM. STRIP TO AGREE WITH LP-14242, ISS. 4. BK & W LEADS FROM EQUALIZER WERE SHOWN CONNECTED WITH CORD TIPS TO SCREW TERMS. 20 & 21 RESP. OF TERM. STRIP ON TOP SIDE.			
REMOVED: RESISTOR DESIGNATED ITEM 42, BETWEEN SOLDER TERMS. 2 & 4 OF TERM. STRIP. POT. LEADS BK & W WERE SHOWN FROM SCREW TERMS. 2 & 4 RESP. ON TOP SIDE OF TERM. STRIP.			
CHANGED: IN VIEW FROM TOP ETC, TERM. STRIP TO AGREE WITH LP-14242, ISS. 4.			
CANCELED: IN NOTE E ITEM 42.			
SE. NEW 5/11/55			
CO-405392			
ISSUE 3	11-17-55		

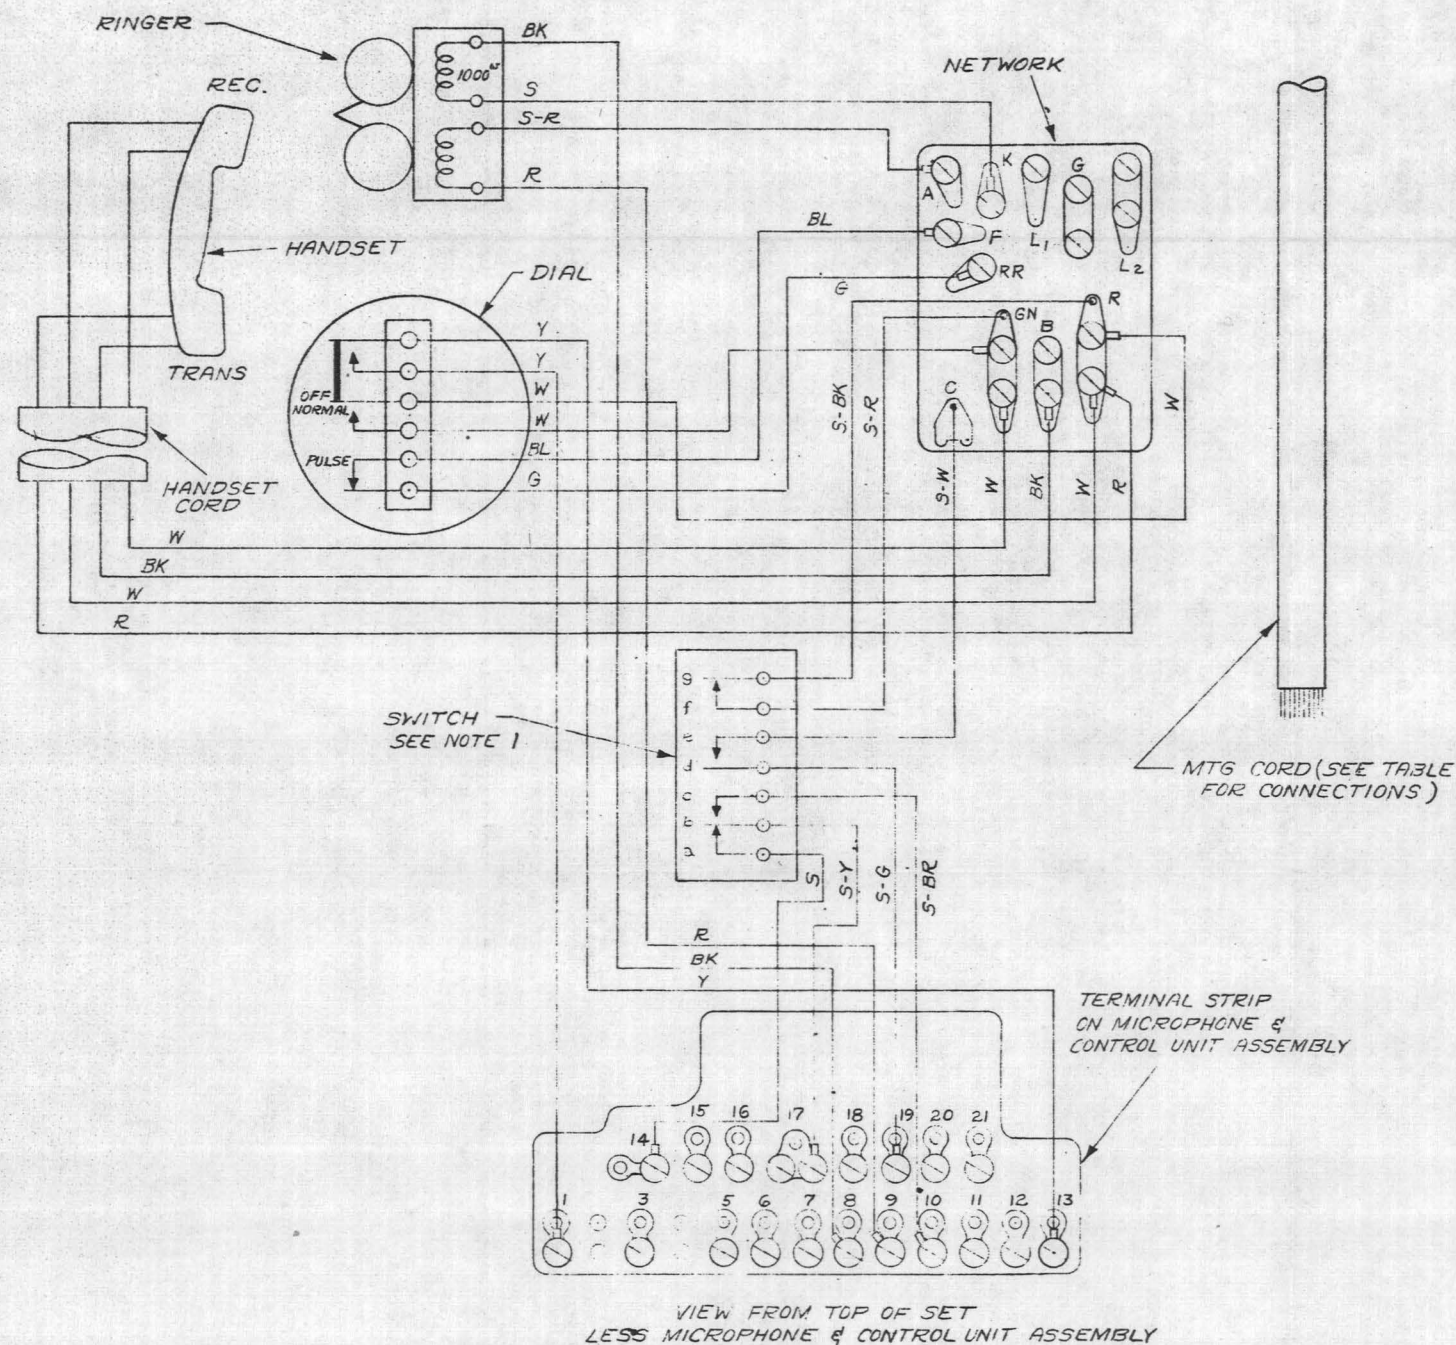

TELEPHONE SET	KEY FEATURES	MTG CORD	COLOR OF MOUNTING CORD CONDUCTORS TO TERMINALS ON MICROPHONE & CONTROL UNIT ASSEMBLY																	* TERMINAL ON NETWORK	*
			BR-BK	BR-Y	BR-BL	BR-W	R-W	G-Y	R-BK	Y	G	BR-G	R-G	R-BL	R-Y	BR-R	R	BL	W		
MANUAL DIAL	592A-3 592B-3	CN-OFF	D18F-3	3	5	6	7	8	9	10	11	12	15	16	17	17	18	19	20	21	RR

NOTES:

- A. (L FOR METHOD OF CONNECTING AND SOLDERING LEAD WIRES TO CONTACT SPRINGS AND EYELET TYPE TERMINALS REFER TO LA850112-33, FIGS. 84 & 85A RESP.)
- B. (L FOR METHOD OF WRAPPING AND SOLDERING LEADS TO CONTACT SPRING TERMINALS REFER TO LA850112-37 FIG. 101.)
- C. ALL OTHER SOLDERING SHALL BE PER KS524 METHOD C.

NOTES CONTINUED


- D. ALL WIRES ARE LEADS OF INDIVIDUAL APPARATUS, UNLESS DESIGNATED WITH ITEM NUMBERS.
- E. ITEMS 5, 6, 24, 25, 26, 27, & 28 ARE SPECIFIED IN STOCK LIST OF LP14A241

NOTES:

- 1- CONTACT SEQUENCE:
REMOVING HANDSET
1. cb CLOSES BEFORE de
2. fg OPENS
RESTORING HANDSET
1. fg CLOSES
2. de OPENS BEFORE cb.

- 2- FOR MANUAL SERVICE, REPLACE DIAL WITH APPARATUS BLANK, AND GREEN LEAD FROM TERMINAL 12 OF TERMINAL STRIP ASSEMBLY SHALL BE TRANSFERRED FROM (F) TERMINAL TO (RR) TERMINAL AT NETWORK.

CONNECT TO TERMINAL "F" ON NETWORK. (SEE NOTE 2)

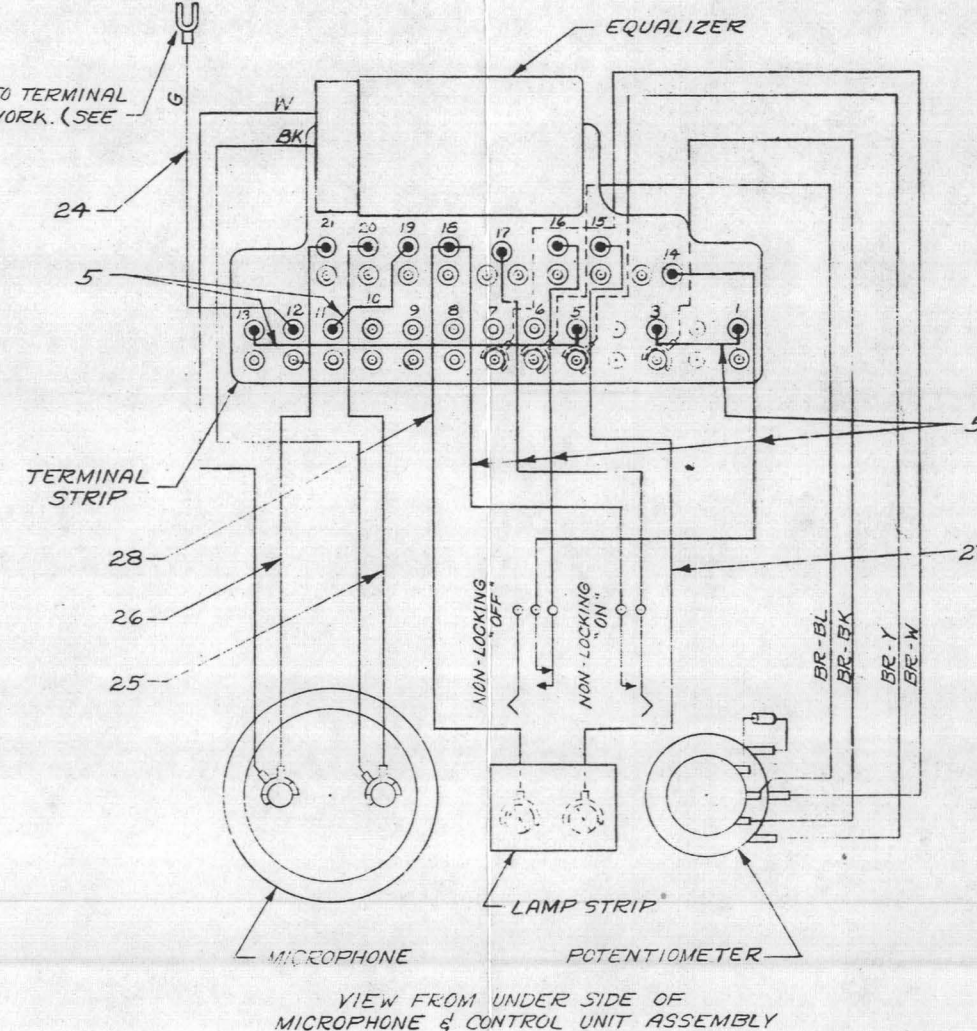

LA-540264

3

592 TYPE
TELEPHONE
SETS

WIRING DIAGRAMS

SCALE —


WESTERN ELECTRIC CO. INC.
ENGINEER OF MANUFACTUREBELL TELEPHONE
LABORATORIES, INC.

LA-540264

DESIGNATES GUIDANCE INFORMATION

DIMENSIONS UP TO AND INCLUDING 72 INCHES EXPRESSED IN INCHES
NON-LIMITED DIMENSIONS, OTHER THAN SIZE OF RAW MATERIAL, SHALL
BE HELD WITHIN FRACTIONAL DECIMAL

DWG. SIZE
4S

[illegible]

DWG SIZE
3S LA-5402.65