

SETS, TELEPHONE—Continued

250 Type Telephone Sets
Wiring Diagram

* MAKES LAST
SWITCH
ASSEMBLY

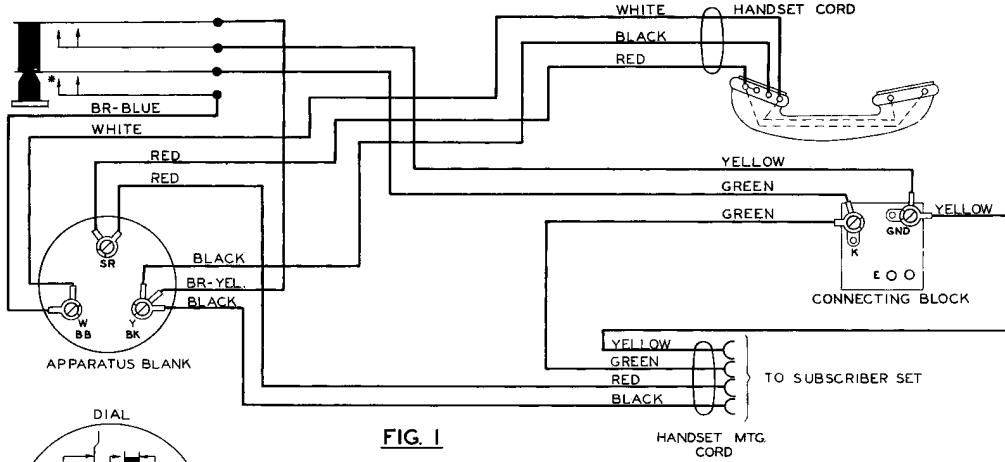


FIG. 1

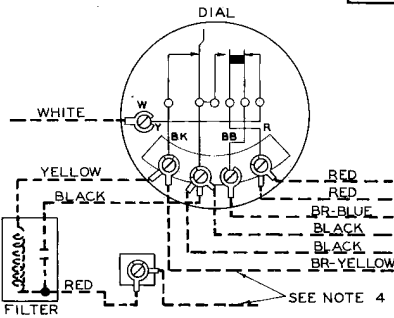


FIG. 1A

NOTES:

- 1- WHEN SHIPPED FROM FACTORY ALL 250 TYPE TELEPHONE SETS ARE CONNECTED FOR ANTI-SIDETONE COMMON BATTERY SERVICE AS SHOWN. FOR OTHER SERVICE RECONNECT IN ACCORDANCE WITH DIAGRAMS BELOW.
- 2- 250AW TELEPHONE SET EQUIPPED WITH APPARATUS BLANK.
- 3- 250BW TELEPHONE SET EQUIPPED WITH DIAL AS SHOWN IN FIG. 1A.
- 4- WHEN FILTER IS USED BROWN-YELLOW LEAD SHALL BE CONNECTED TO TERMINAL ON FILTER AS INDICATED.
- 5- THE FOLLOWING CHANGES SHOULD BE MADE TO THE INTERNAL WIRING OF THE 250 TELEPHONE SET WHEN CONVERTING FROM FIG. 1 TO FIG. 5.
REMOVE WHITE LEAD OF HANDSET CORD FROM W-BB AND CONNECT TO SR
REMOVE RED LEAD OF HANDSET CORD FROM SR AND CONNECT TO W-BB
REMOVE BLACK LEAD OF HANDSET MTG CORD FROM Y-BK AND CONNECT TO W-BB.

Method of Connecting 250 Type Telephone Set to Subscriber Sets

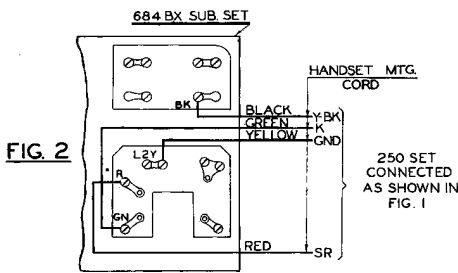


FIG. 2

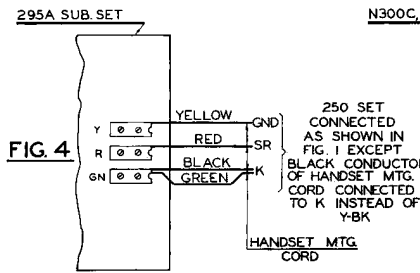


FIG. 4

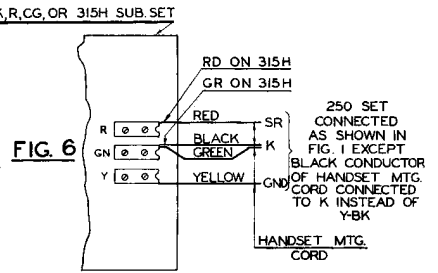


FIG. 6

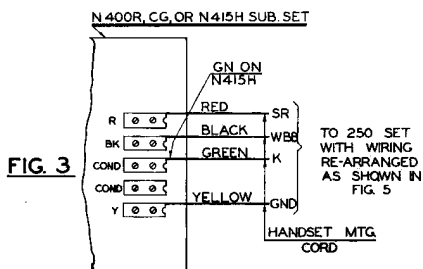


FIG. 3

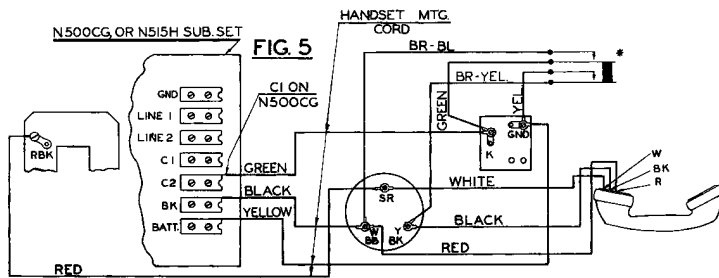


FIG. 5