

LM


Godkänd - Approved
G/Ar/C 26.4.67 Edén
Benämning
TELEFONAPPARAT typ 6-7/DLG, Bord
för CB 1-2/DLN, Vågg
Utan nivåreglering
Krets- och anslutningsschema
Name
TELEPHONE INSTR. type 6-7/DLG, Table set
for CB 1-2/DLN, Wall set
Without aut.-line compensation
Circuit and terminal diagram

No. 3/360290

Type	Capacitor μF		Resistor Ω					Induction coil IC n for end wire					Bz: Bz/0	B: Bz/0	R: Rz/1000	M: MZ/0
	C1	C2	R1	R2			R5	1-2	2-5	5-4	5-3	3-6	Ω	Ω	Ω	Ω
165-169																
175-179	1	0,068	620	750			0	39	39	83	39	22	3100	1800	350	100
185-189																
195-199																

Kop. MA Konstr. HTR
Normgr. Uppg. HTR
Mat.gr. Kontr. K

1st angle projection



Uppg. för: Made for

Ersätter - Replaces


Korr. - Rev.

A 10.5.67
B 21.6.67
C 10.8.67
D 9.10.67
E 17.11.67
F 5.8.68
G 2.9.68
H 12.9.69

Terminal box type NEF 180




Plug type RPV 115

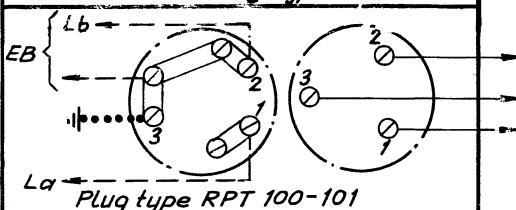


Plug type RPT 100-101

—○— Only for manual CB-systems
••••• If earth button K is contracted for. With 3-wire in cord: Connect B to screws 9 and 12. Remove red conductor from screw 4 to 1. EB can not be connected. Remove strap between 2 and 3 in the terminal unit.
For tel. instr. without terminal unit: Connect B to 12 and 16. Strap between 3 and 4
○○○○ If varistor V3 is contracted for

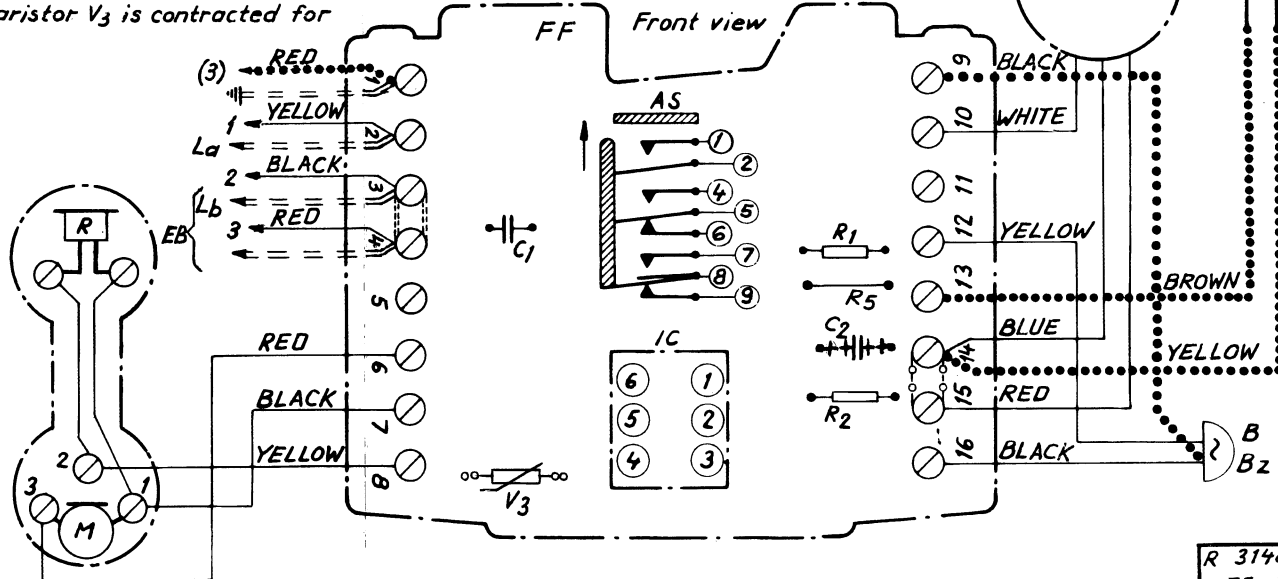

R 31480
75 x 37

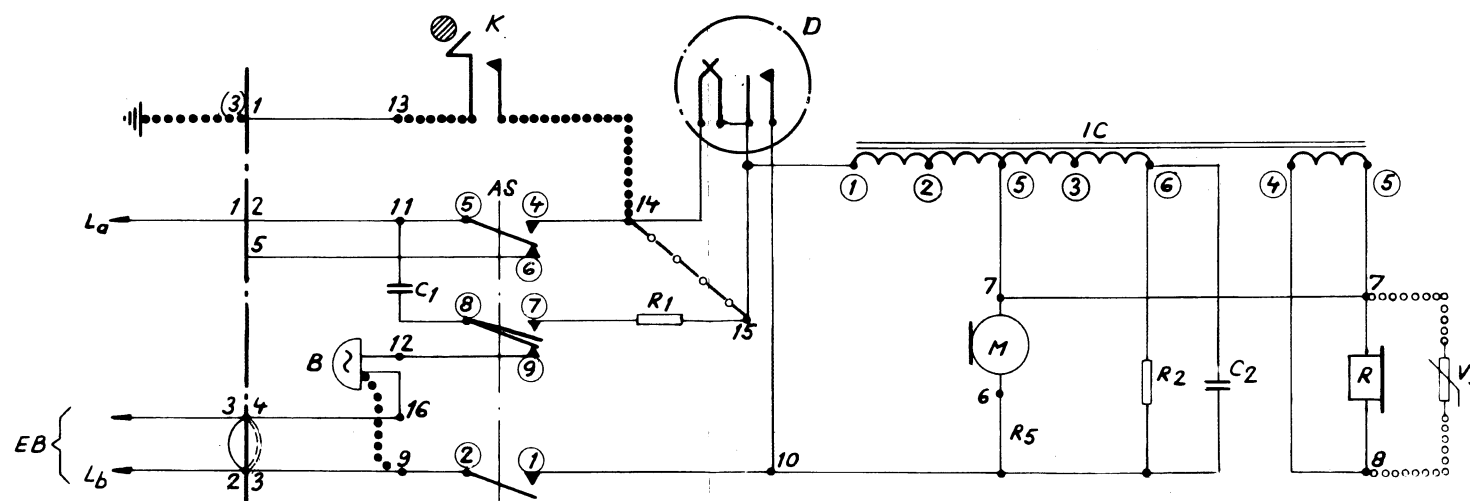

CEC
CAT
EDB
650655
BL25,01
BL50,01

Andra utgåvor

Reprod. R 31755
A3

F 3062/a A3bm

No 3/360290

1 Sheet