


AS SEEN FROM REAR

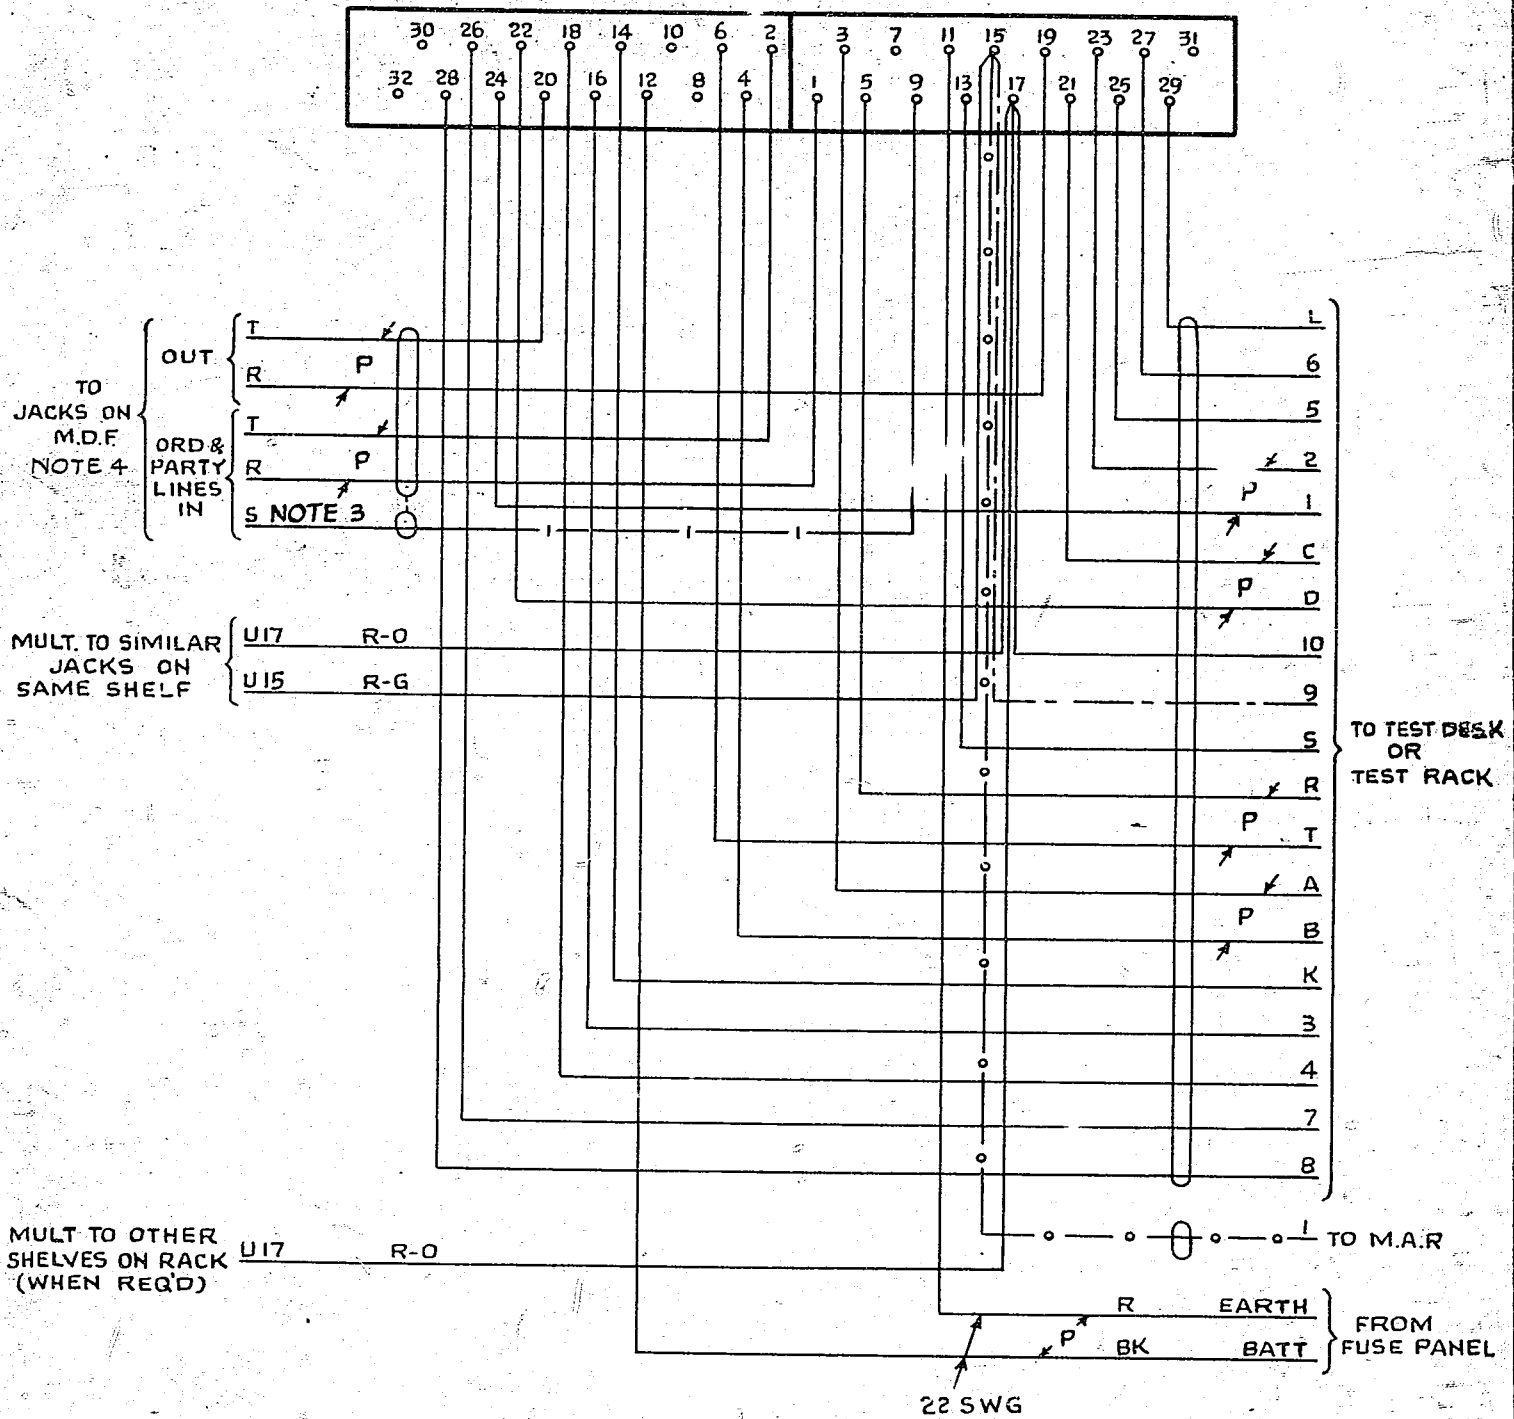

NOTES

1. ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
2. WHEN MORE THAN 10 CCTS ARE REQUIRED, DELETE CONNECTIONS SHOWN THUS AND ADD CONNECTION SHOWN THUS .
3. AT EXCHANGES EQUIPPED WITH 400 PAIR PER VERTICAL MDF THE 5" LEAD IS NOT REQUIRED.
4. AT SOME EARLY EXCHANGES THESE LEADS WERE CABLED VIA I.D.F.

AMENDMENT PARTICULARS	ISSUE	DATE	APPD	50V	E
NOTE 3 AMENDED. (69688)	6	29.11.63	DBK		
5' LEAD FROM U9 TO PBX AUX STRIP CONN DELETED (77986)	5	13.6.63	DBK		
REFS TO I.D.F. DELETED. NOTE 4 ADDED (66115)	4	22.2.63	DBK		
NOTE 3 & REF THERETO ADDED (42909)	3	4.8.61	DBK		
I.D.F. REFERENCE ADDED NOTE 1 AMENDED (69047)	2	23.6.57	DBK		
(31667)	1	5.5.54	DBK		
<b>TEST DESK OR TEST RACK TEST &amp; PLUGGING-UP LINES.</b>					
<b>GBU 10541</b>					
N.Z. PD.	DRAWN	CHECKED	WIRED	ENGR <sup>RS</sup>	

5 Centimetres

10

15

20

25

30