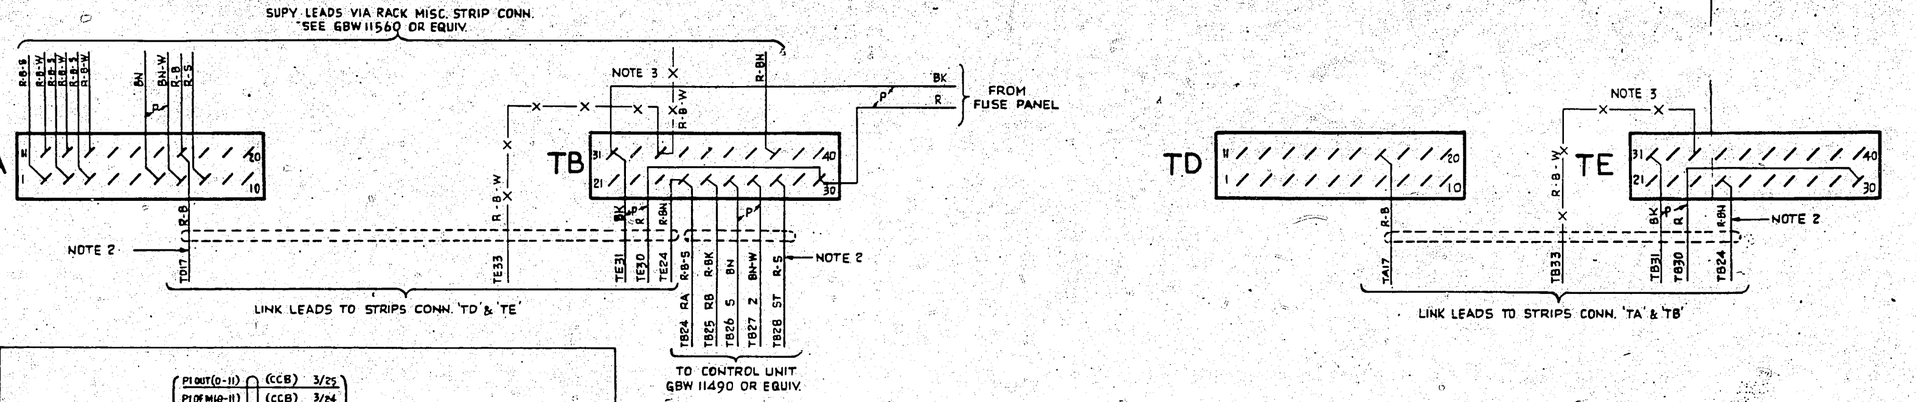

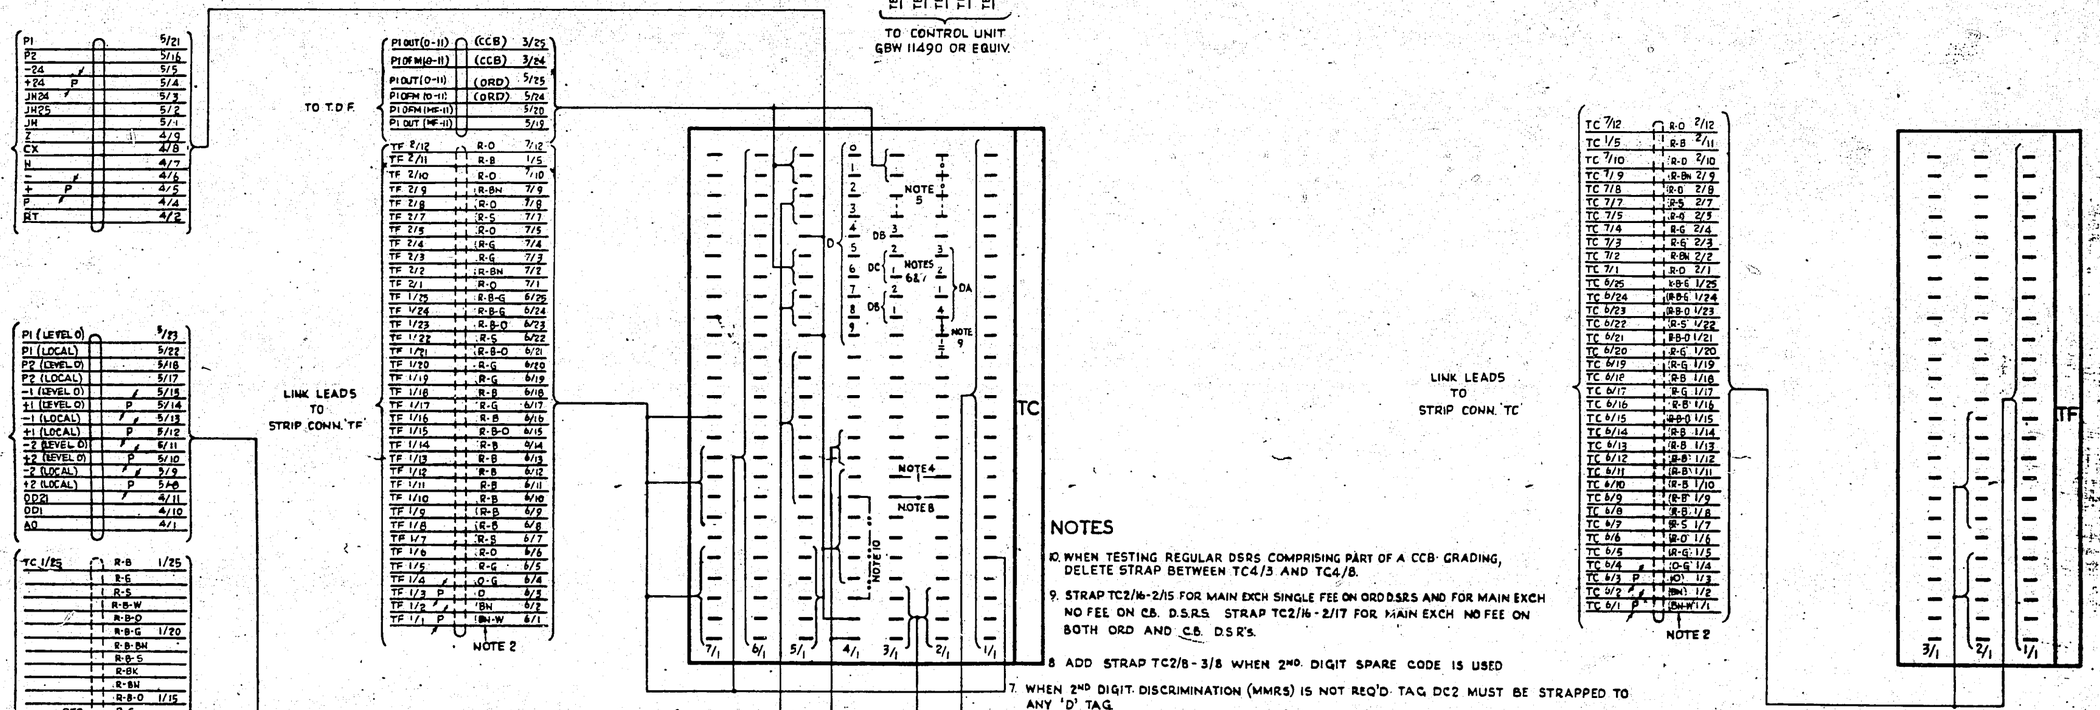

NOTES

10. WHEN TESTING REGULAR DSRS COMPRISING PART OF A CCB GRADING, DELETE STRAP BETWEEN TC4/3 AND TC4/8.
9. STRAP TC2/16-2/15 FOR MAIN EXCH SINGLE FEE ON ORD D.S.R.S AND FOR MAIN EXCH NO FEE ON CB. D.S.R.S. STRAP TC2/16-2/17 FOR MAIN EXCH NO FEE ON BOTH ORD AND C.B. D.S.R.'S.
8. ADD STRAP TC2/8-3/8 WHEN 2ND. DIGIT SPARE CODE IS USED
7. WHEN 2ND DIGIT DISCRIMINATION (MMRS) IS NOT REQ'D TAG DC2 MUST BE STRAPPED TO ANY 'D' TAG.
6. THE DA, DB & DC TAGS ARE ASSOC'D WITH SENDING OF 1ST, 2ND & 3RD DIGITS RESPECTIVELY AND ARE TO BE STRAPPED TO THE RELEVANT 'D' TAGS TO ROUTE THE CALL TO THE REQUIRED LEVELS
5. WHEN SPARE CODE CANCEL FACILITY IS REQ'D DELETE STRAPS TC2/22-23 AND TC3/22-23 AND ADD STRAPS TC2/23-24-25.
1. ALL LEADS WIRED TO CONTROL UNIT. THOSE ACTUALLY IN SERVICE ARE INDICATED BY DESIGNATION ON GBW DIAGRAM OF THE RELEVANT 'TEST UNIT.
2. COLOUR CODE USED ONLY WITH FORMED CABLE (25 SWG. UNLESS OTHERWISE SPECIFIED) ALL WIRING ON TA, TB, TD & TE STRIPS CONN. TO BE 22 SWG
3. WHEN EXCHANGE IS NOT EQUIPPED WITH POSITIVE BATTERY, ADD WIRING SHOWN. —— x —— x ——
4. ADD STRAP TC2/9-3/9 WHEN 2ND DIGIT ABSORPTION IS REQUIRED FOR ROUTING A LOCAL CALL.

AMENDMENT PARTICULARS	ISSUE	DATE	APP'D
CB LEAD FROM TC4/3 DELETED	9		

N.Z.P.O. | DRAWN | CHECKED | WIRED | ENGINRS

ROUTINER TEST UNIT. FOR DISCRIMINATING SELR. REPEATERS ORDINARY & COIN BOX. 200 OUTLET 2000 TYPE

GBU 11140 | 50 | E