


AS SEEN FROM REAR

NOTE 2

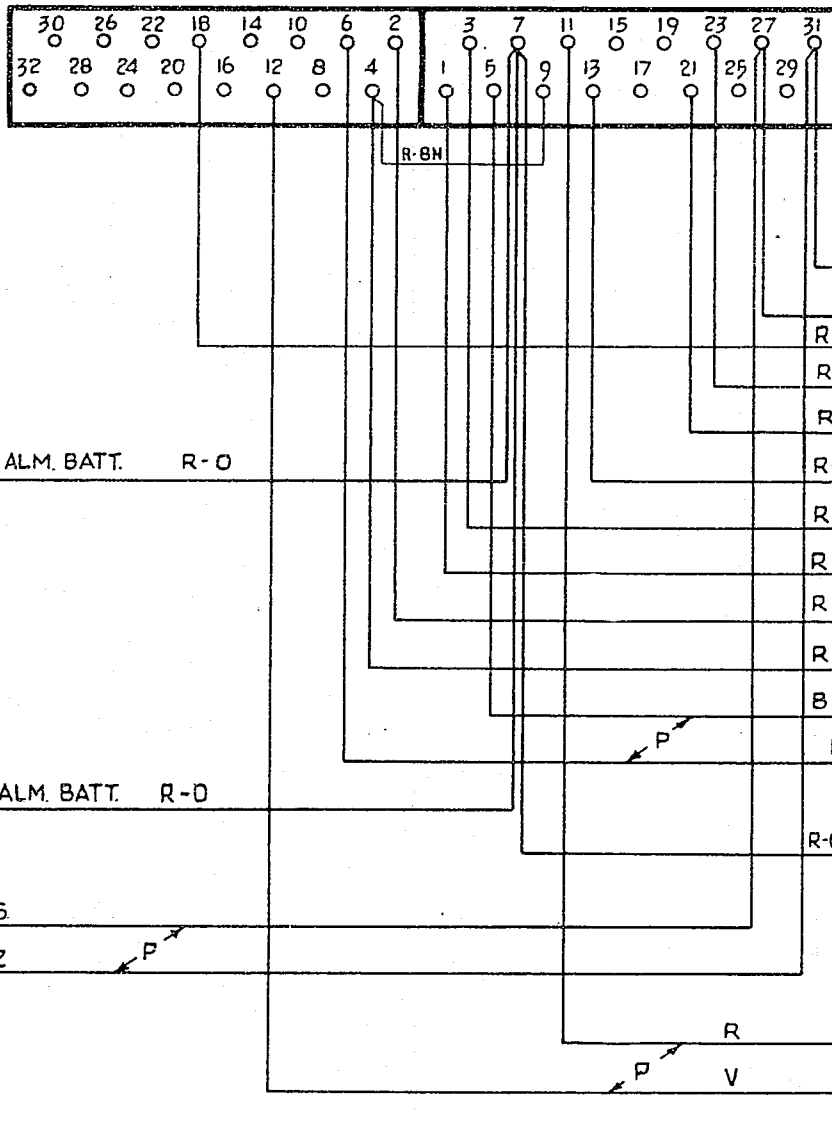

NOTES

1. ALL WIRING TO BE 0.7mm UNLESS OTHERWISE SPECIFIED.
2. JACK POINTS U9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
3. ON SOME EARLY EQUIPMENT BATTERY WIRING IS BK.

| U27 | U31 | REGISTERS |
|-----|------|-------------|
| G | G-W | 1-5 SHELF A |
| B | B-W | 6-10 " A |
| O | O-W | 1-5 " B |
| BN | BN-W | 6-10 " B |

| | | | | | | |
|--|--|--|-------|---------|--|---------|
| | | | | | INTERWORKING REGISTER TYPE SR4 STEP BY STEP TO ROTARY. 4 SELECTION 7A HUNTING CONTROL ONLY. NO SPECIAL SERVICE SELECTION | |
| NOTE 3 ADDED. WIRE SIZES REVISED. (2112) | | | 2 | 26-7-72 | B.S.H. | |
| _____ (31667) | | | 1 | 5-5-54 | C.S.H. | |
| AMENDMENT PARTICULARS | | | ISSUE | DATE | APPD | 50V E |
| N.Z. P.O. | | | DRAWN | CHECKED | WIRING | CIRCUIT |
| | | | | 15/7/45 | | |
| GBU 11160 | | | | | | |