


0
5 Centimetres
10
15
20
25
30

AS SEEN FROM REAR

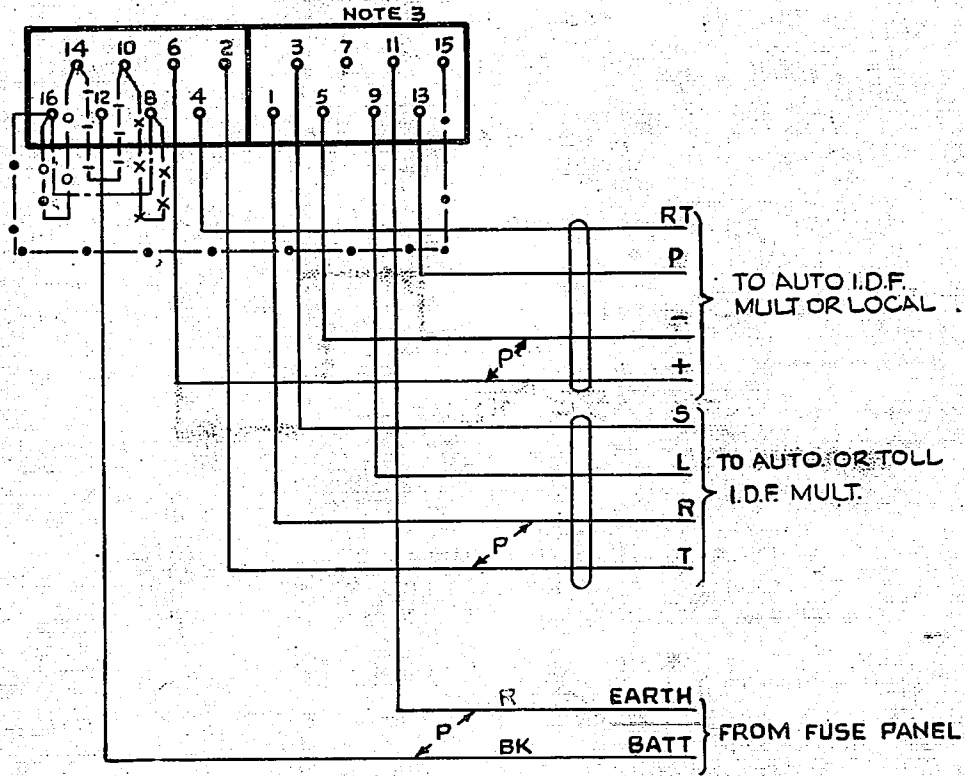

NOTES

1. FOR 4 DIGIT DIALLING ADD STRAP U8-U16 SHOWN THUS

" 5 "	" "	" STRAPS U14-U16	" "		
		AND U8-U10	" "	X	X
" 6 "	" "	" STRAPS U10-U14	" "	I	I
		AND U8-U10	" "	X	X
		AND U15-U16	" "	.	.
2. ALL WIRING TO BE 22 SWG UNLESS OTHERWISE SPECIFIED.
3. JACK POINTS U9 & 11 TO MAKE CONTACT WHEN ELAY SET IS REMOVED.

				TOLL-AUTO RELAY SET 4,5 OR 6 DIGIT NUMBERING.	
IDF CONNECTIONS REVISED. (72161)		3-	9.4.58	ad	
NOTE 1 AND LEADS TO I.D.F. MODIFIED. (31667)		2	5.5.54	C.M.	
		1	15.8.49	V	
AMENDMENT PARTICULARS		ISSUE	DATE	APPO	50V E
N.Z. P.O.		DRAWN CHECKED		WIRING ENGINEERS.	
GBU11380					