


AS SEEN FROM REAR

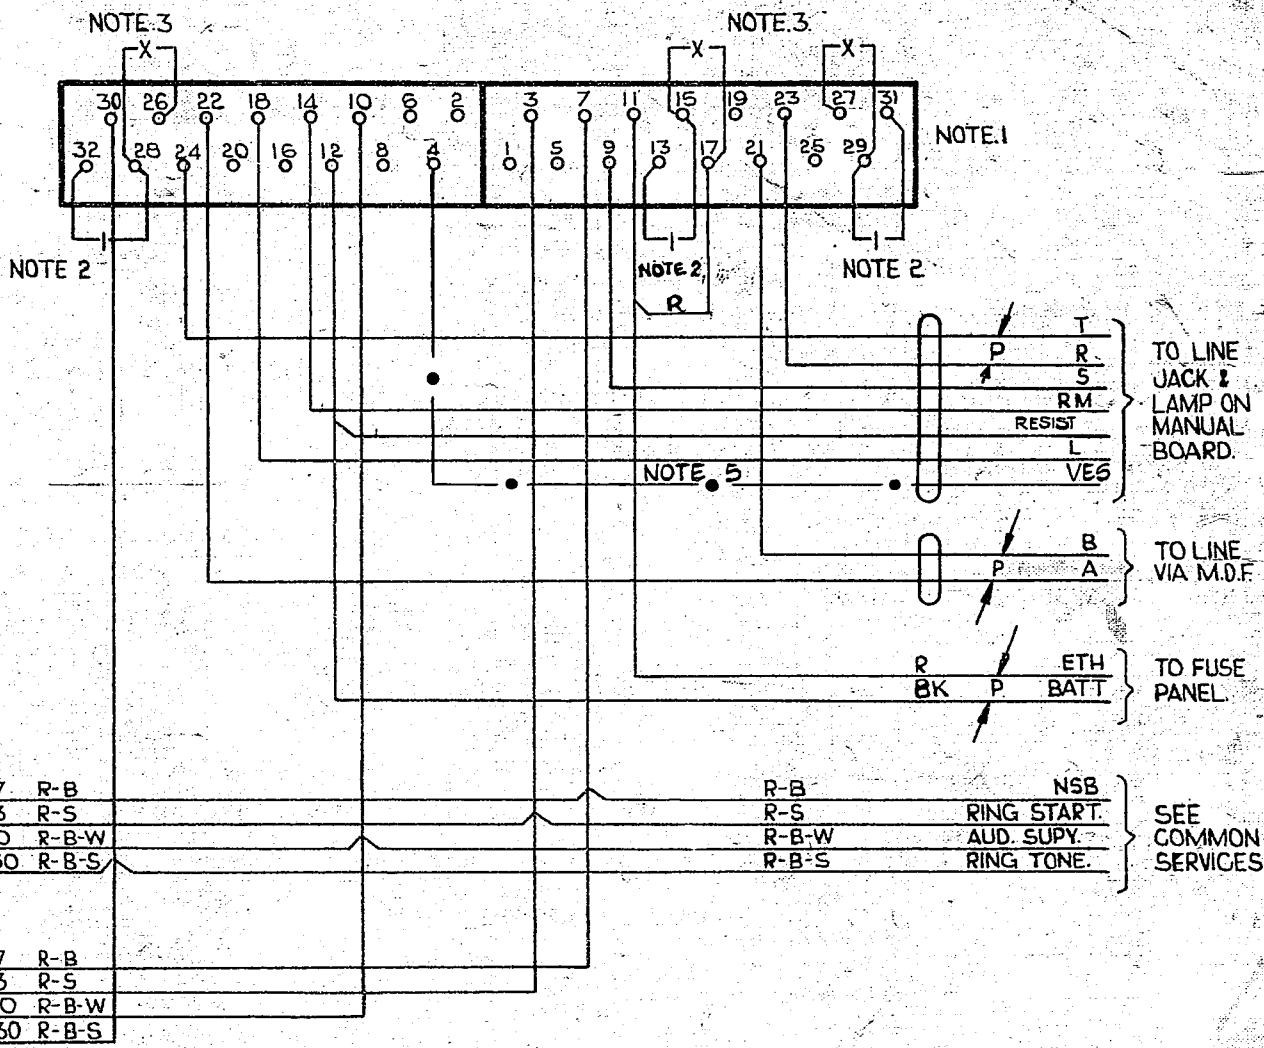

NOTES.

- SHELF JACK POINTS U9-U11 MAKE CONTACT WHEN RELAY SET IS REMOVED.
- FOR BOTHWAY GENERATOR SIGNALLING, ADD STRAPS SHOWN.
- FOR BOTHWAY BALANCED BATTERY SIGNALLING, ADD STRAPS SHOWN.
- ALL WIRING BEARING A COLOUR CODE TO BE 22-SWG UNLESS OTHERWISE SHOWN.
- IF VISUAL ENGAGED LAMP IS PROVIDED ON MANUAL BOARD, ADD CONN SHOWN.

AMENDMENT PARTICULARS.				ISSUE	DATE	APPRO	50V	W
VES LEAD & NOTE 5 ADDED. WIRE GAUGE MOD. (48430)	4	22-11-61	MB					
IN. CABLE TO MAN. BD. 'L' & 'RESIST' LEADS INTERCHANGED (66330)	3	17-12-56	MB					
CONNECTION U11 - U17 WAS NOT SHOWN (66118)	2	19-12-55	MB					
(65410)	1	5-8-55	MB					
GBU 14190								
NZ PO		DRAWN MG	CHECK MB	WIRING MB	CIRCUIT MB			

