




AS SEEN FROM REAR

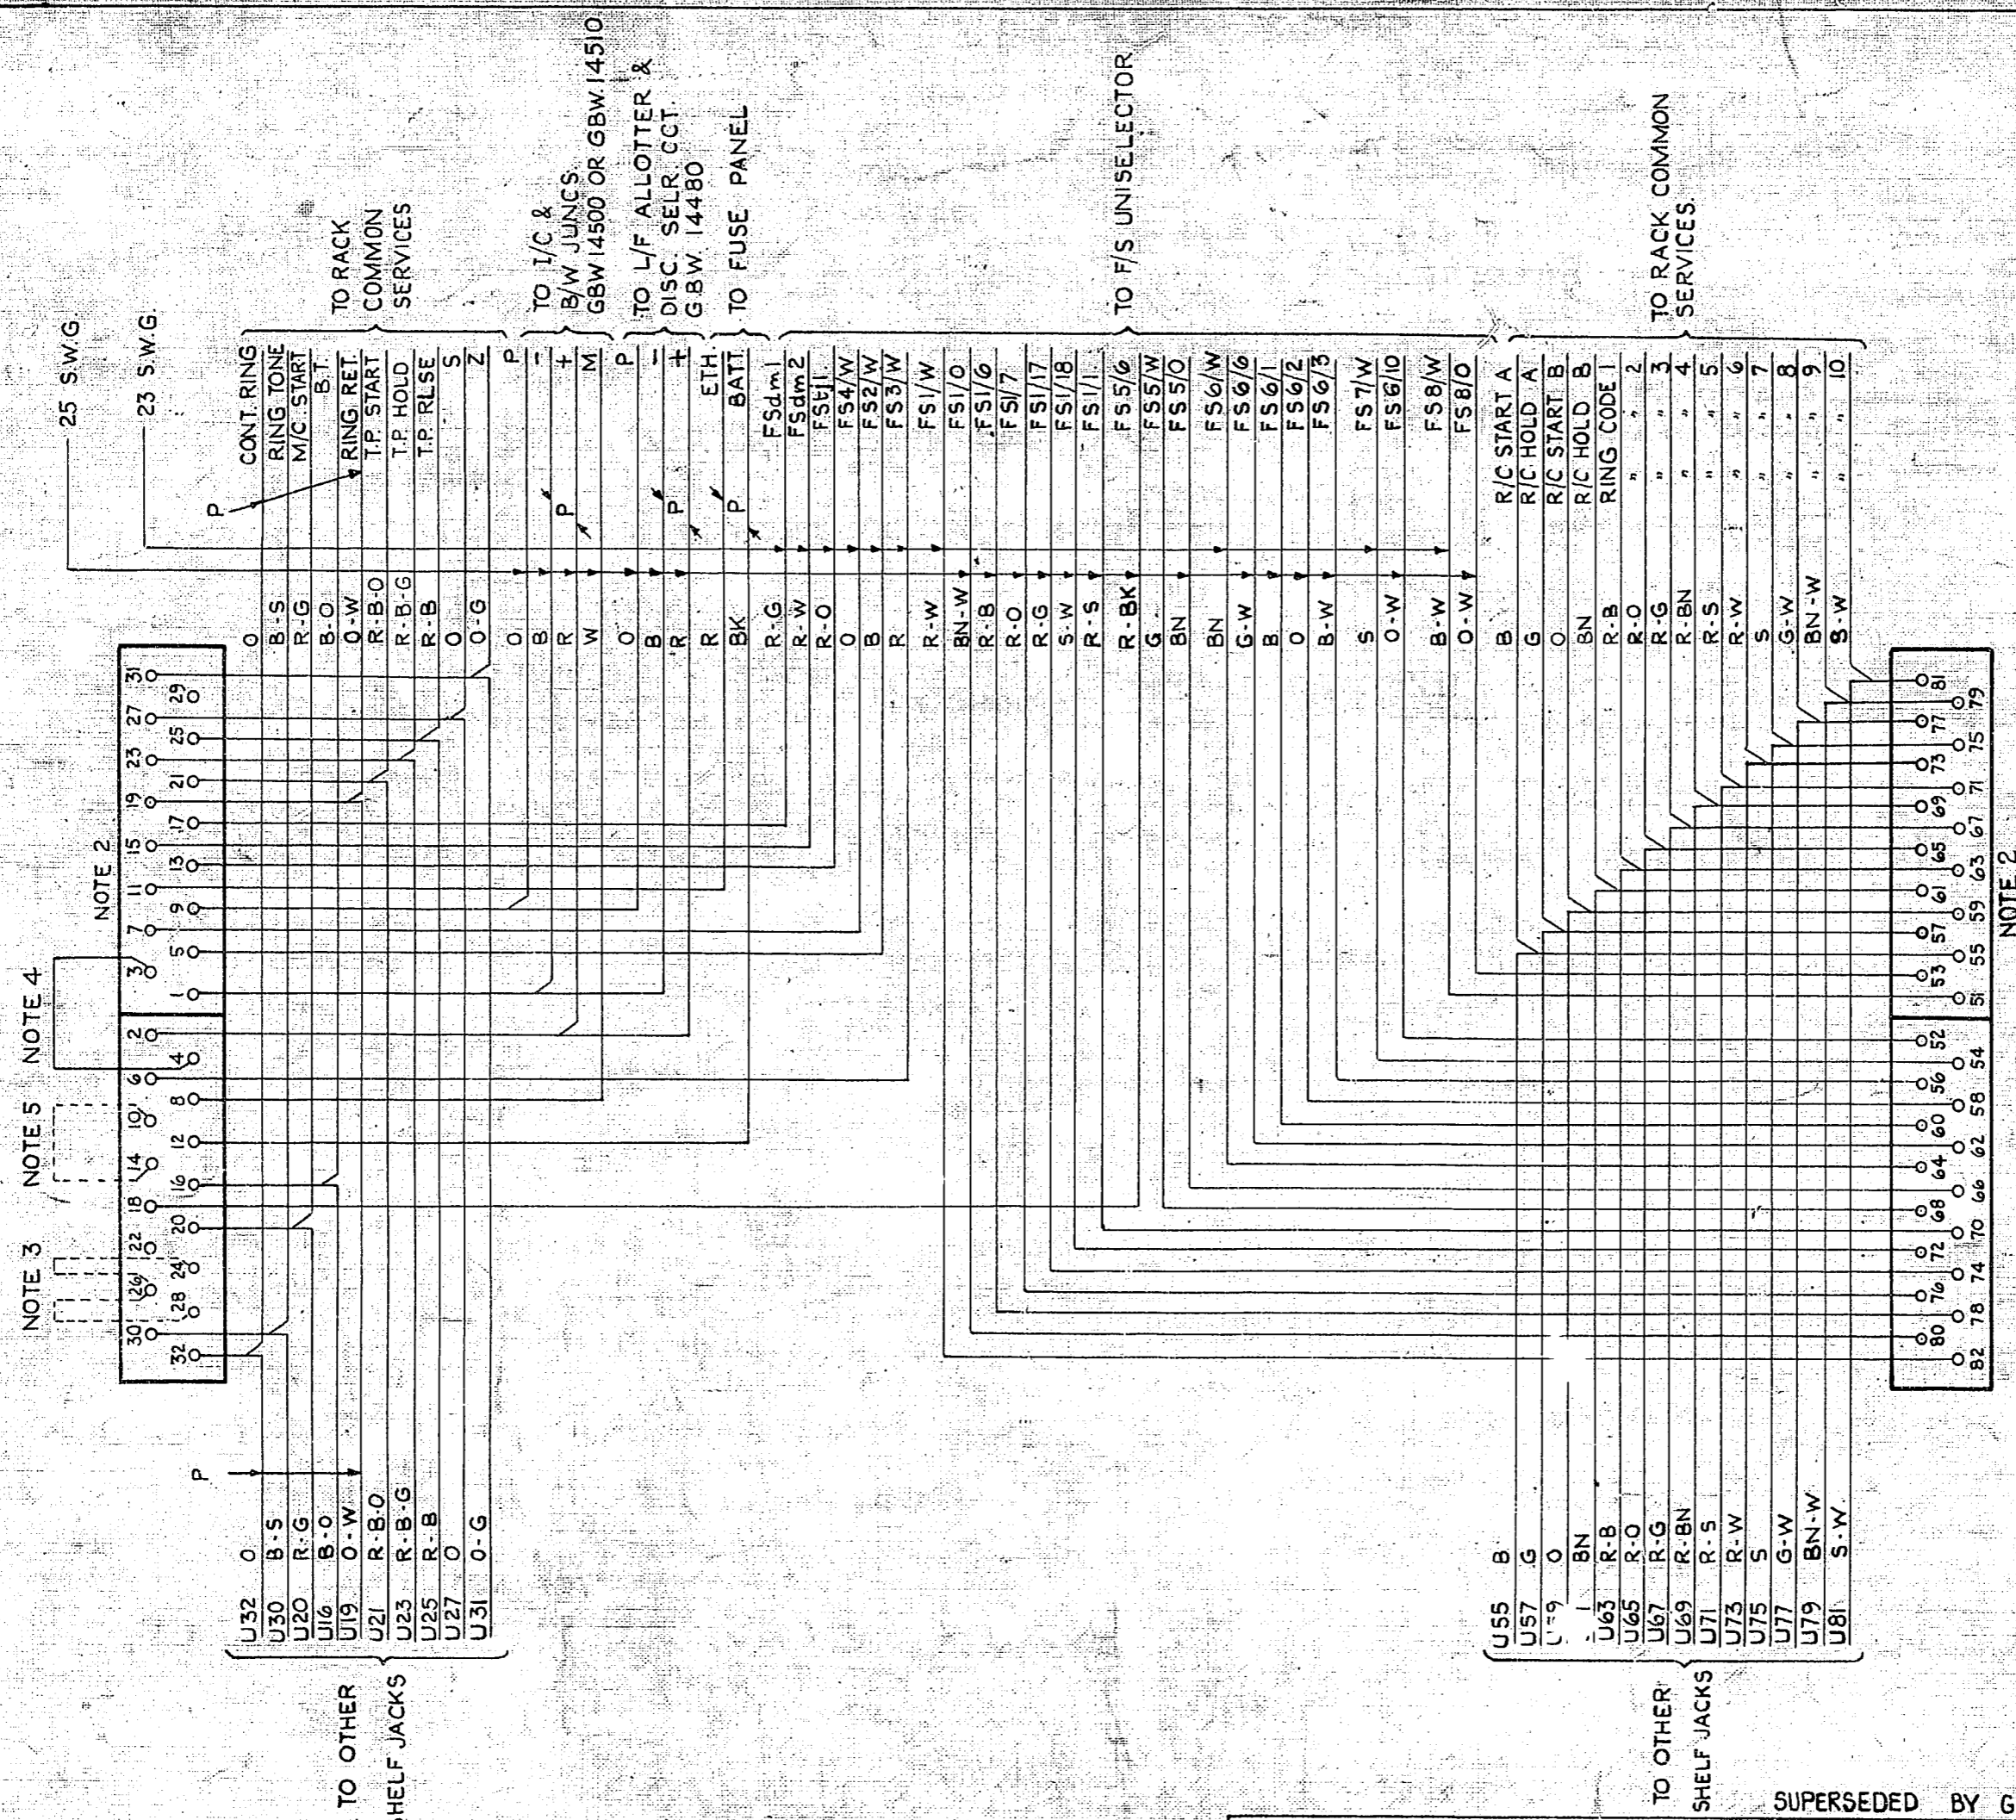

NOTE 2

NOTE 3

NOTE 4

NOTE 5

- NOTES
1. ALL WIRE TO BE 20 SWG UNLESS OTHERWISE SPECIFIED.
  2. U POINTS 9 & 11 TO MAKE CONTACT WHEN PLATE IS REMOVED U POINTS U59 & U61 MUST NOT MAKE CONTACT WHEN PLATE IS REMOVED.
  3. INSERT STRAP U26 TO U28 WHEN UNIT IS ATTACHED TO U.A.X. 13
  4. INSERT STRAP U26 TO U24 WHEN UNIT IS REMOVED FROM U.A.X. 13
  5. IN THE SPECIAL EVENT OF EITHER PARTY RELEASE BEING REQUIRED REMOVE STRAP U3 - U4
  6. IN THE SPECIAL EVENT OF METERING ON LOCAL CALLS BEING REQUIRED ADD STRAP U10 - U14.

SUPERSEDED BY GBU.13660. FOR NEW WORK.			
FINAL SELECTOR FOR PARTY LINES U.A.X. NZ. 13R.			
DESIGNATION OF LEAD FROM U52 AMENDED (68316)	2	24.12.56	CW.M.
(66254)	1	8.12.56	CW.M.
AMENDMENT PARTICULARS	ISSUE	DATE	APPD
N.Z.P.O.			
			G.E.C. 705018
			50V C.
			GBU 14490