


AS VIEWED FROM REAR.

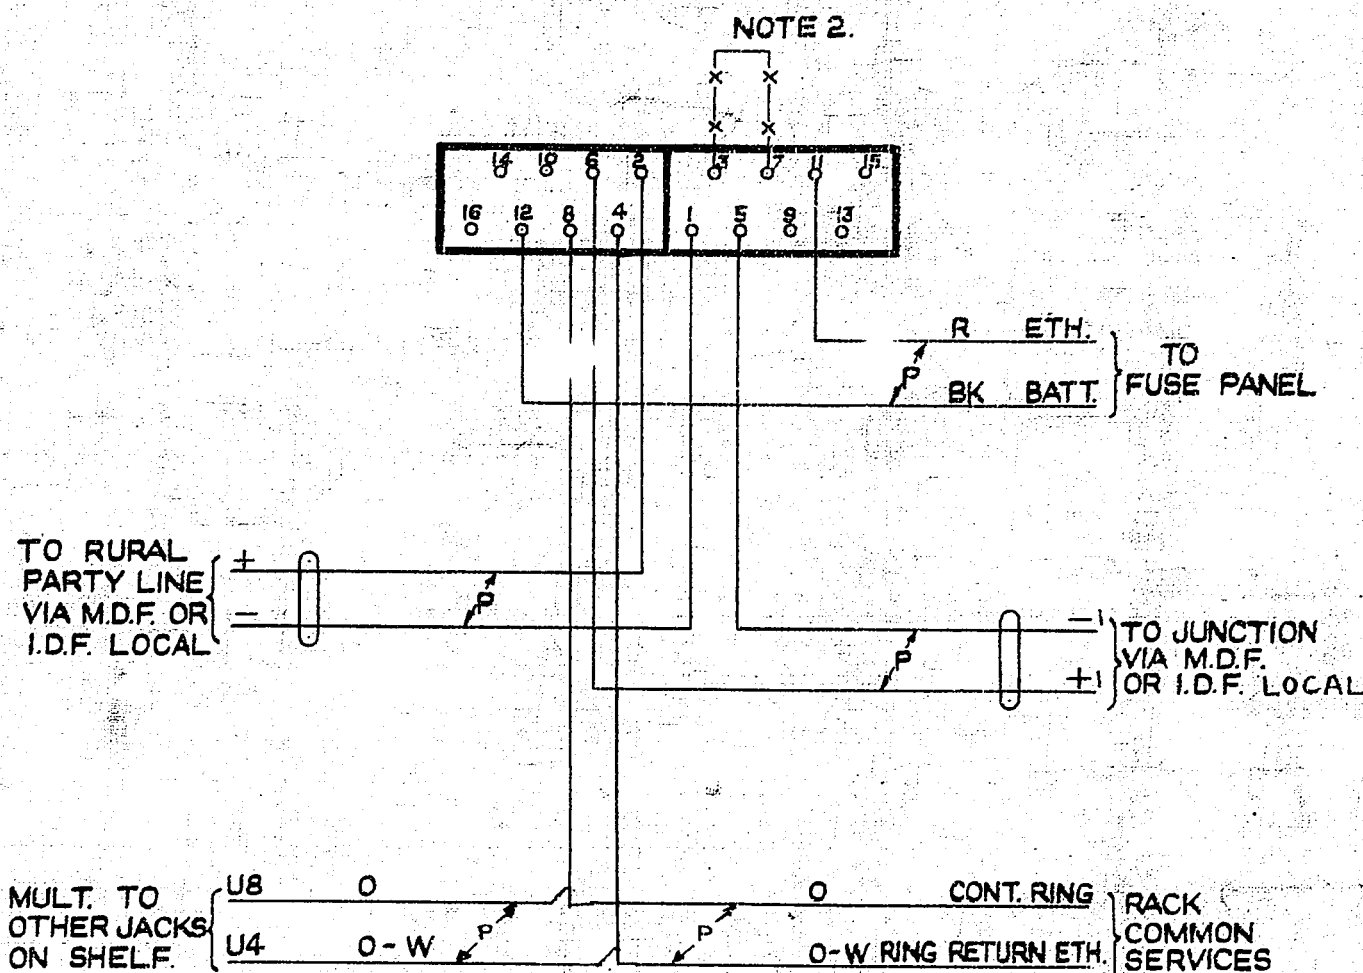

NOTES

1. ALL WIRING TO BE 22 SWG. UNLESS OTHERWISE SPECIFIED.
2. TO INCREASE SENSITIVITY TO RINGING WHEN USED ON LINES OF VERY HIGH RESISTANCE, STRAP U PTS. 3 & 7.

				GENERATOR SIGNALLING REPEATER RELAY SET.			
				(32405)	I	15-6-59	OK
AMENDMENT PARTICULARS				ISSUE	DATE	APPD	50Y W
NZ.P.O.	5	Centimetres	10	DRAWN	CHECKD	WIRING CIRCUIT	GBU 15310
							15 20