

FIG. 1  
AS SEEN FROM REAR


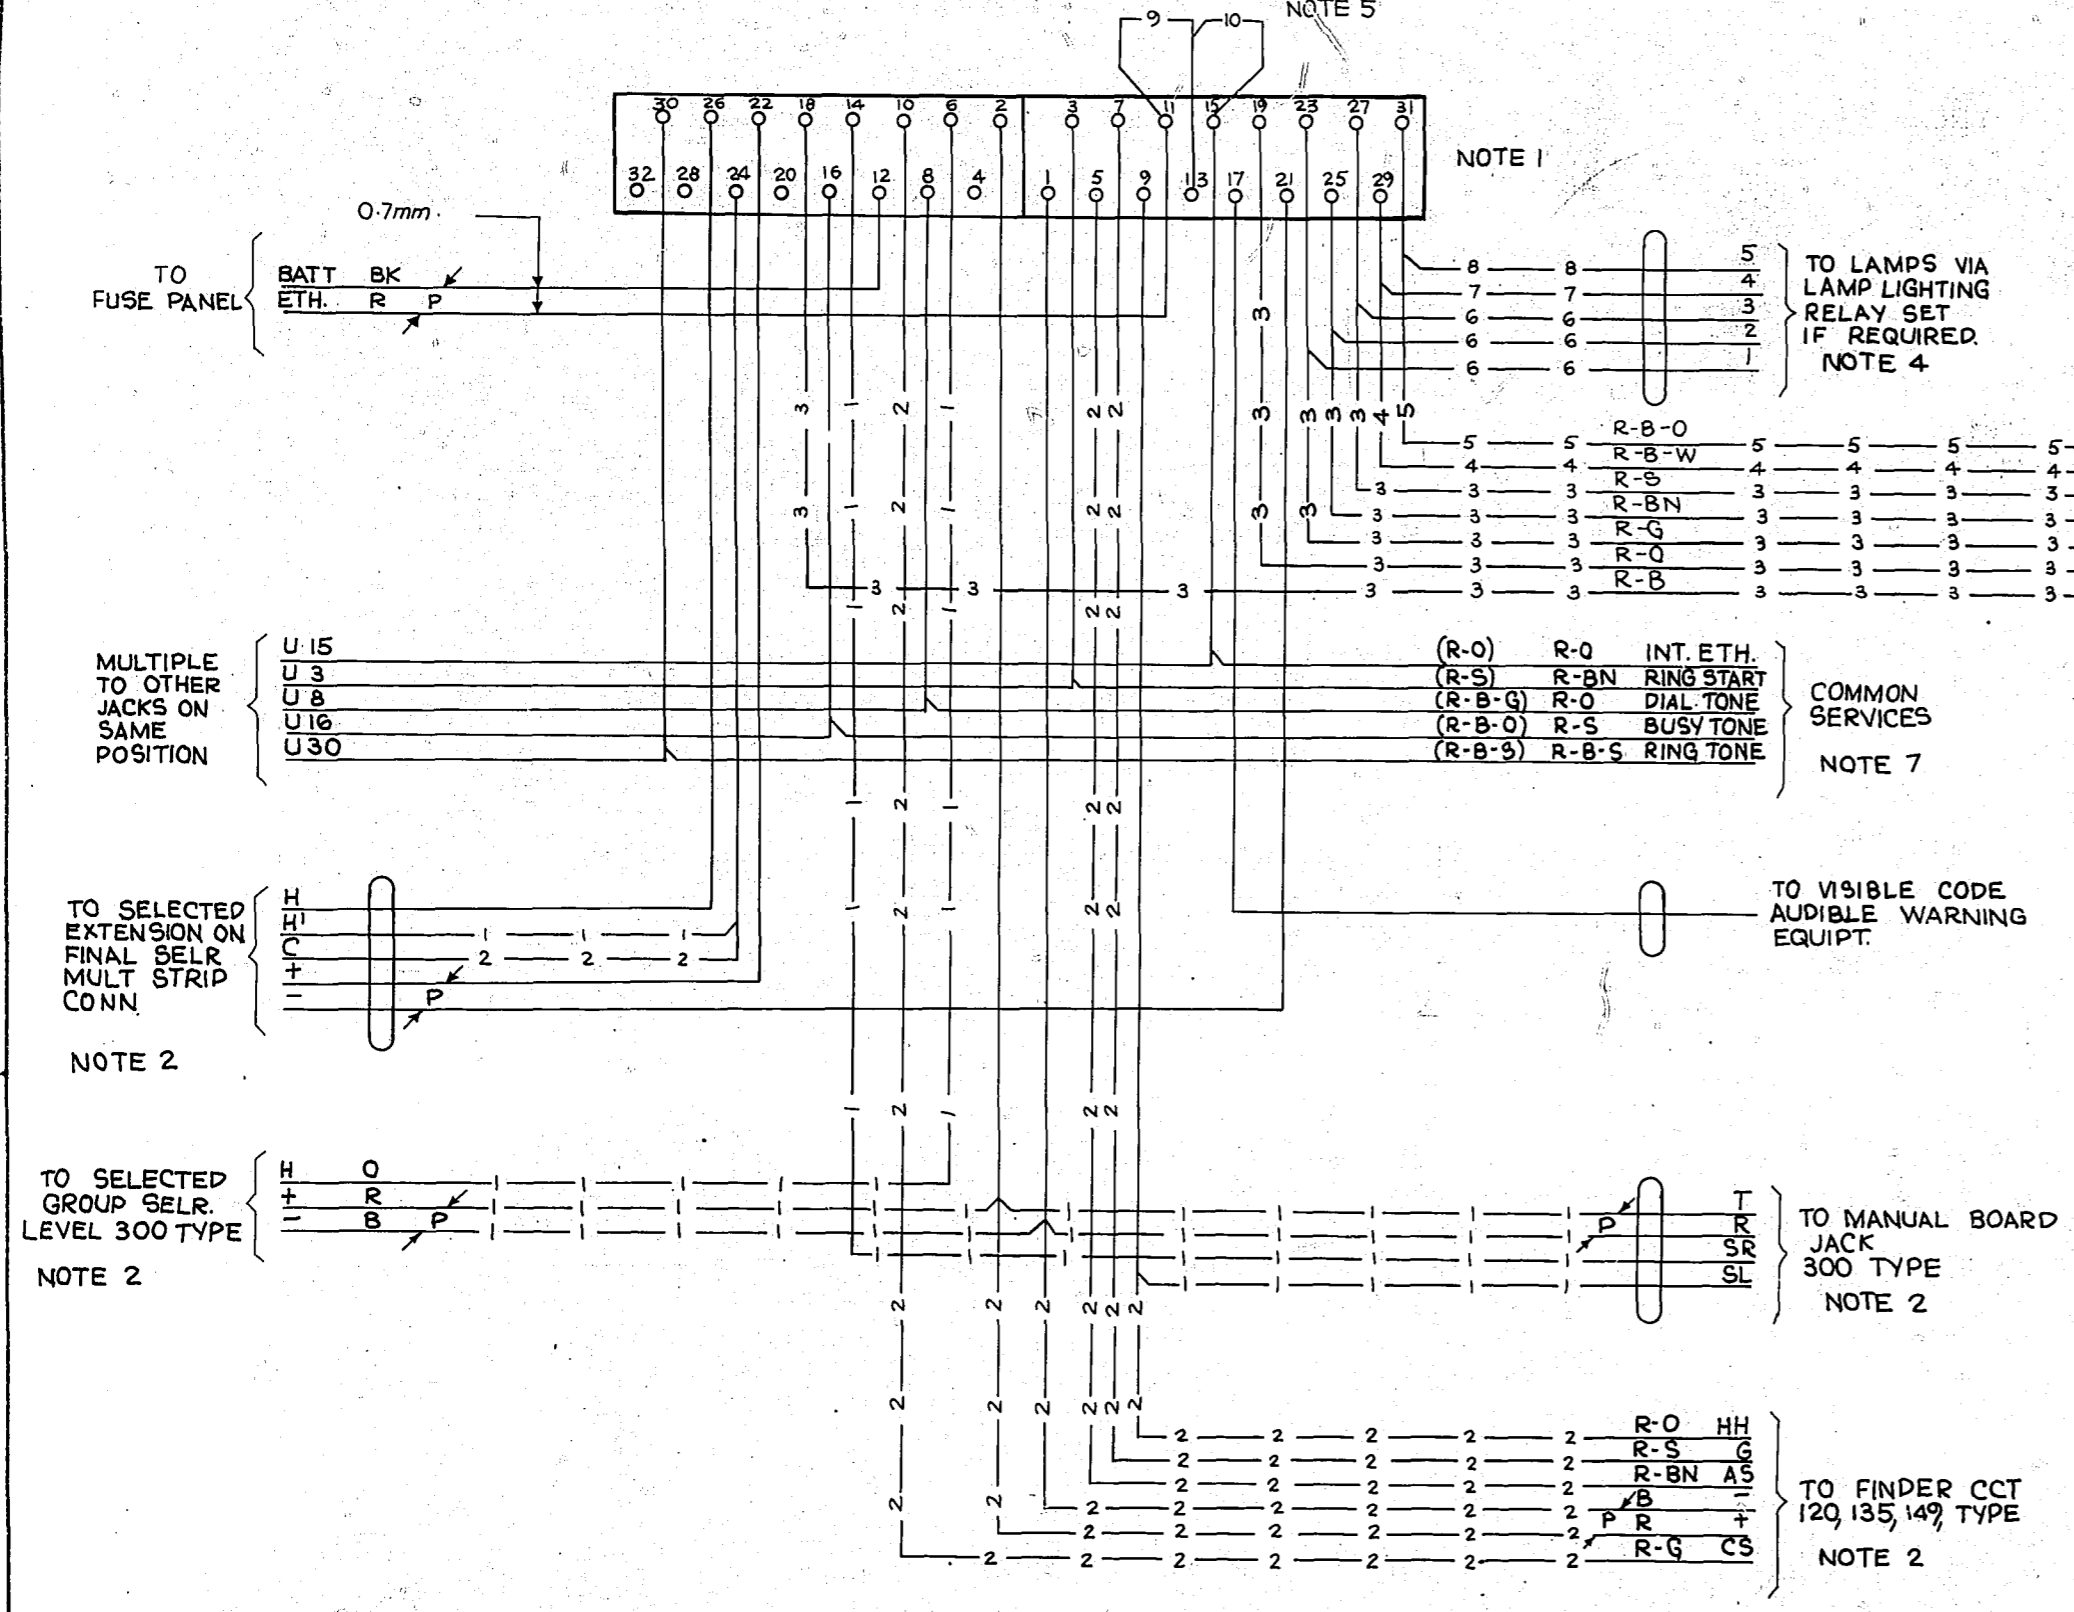


FIG. 2  
AS SEEN FROM REAR

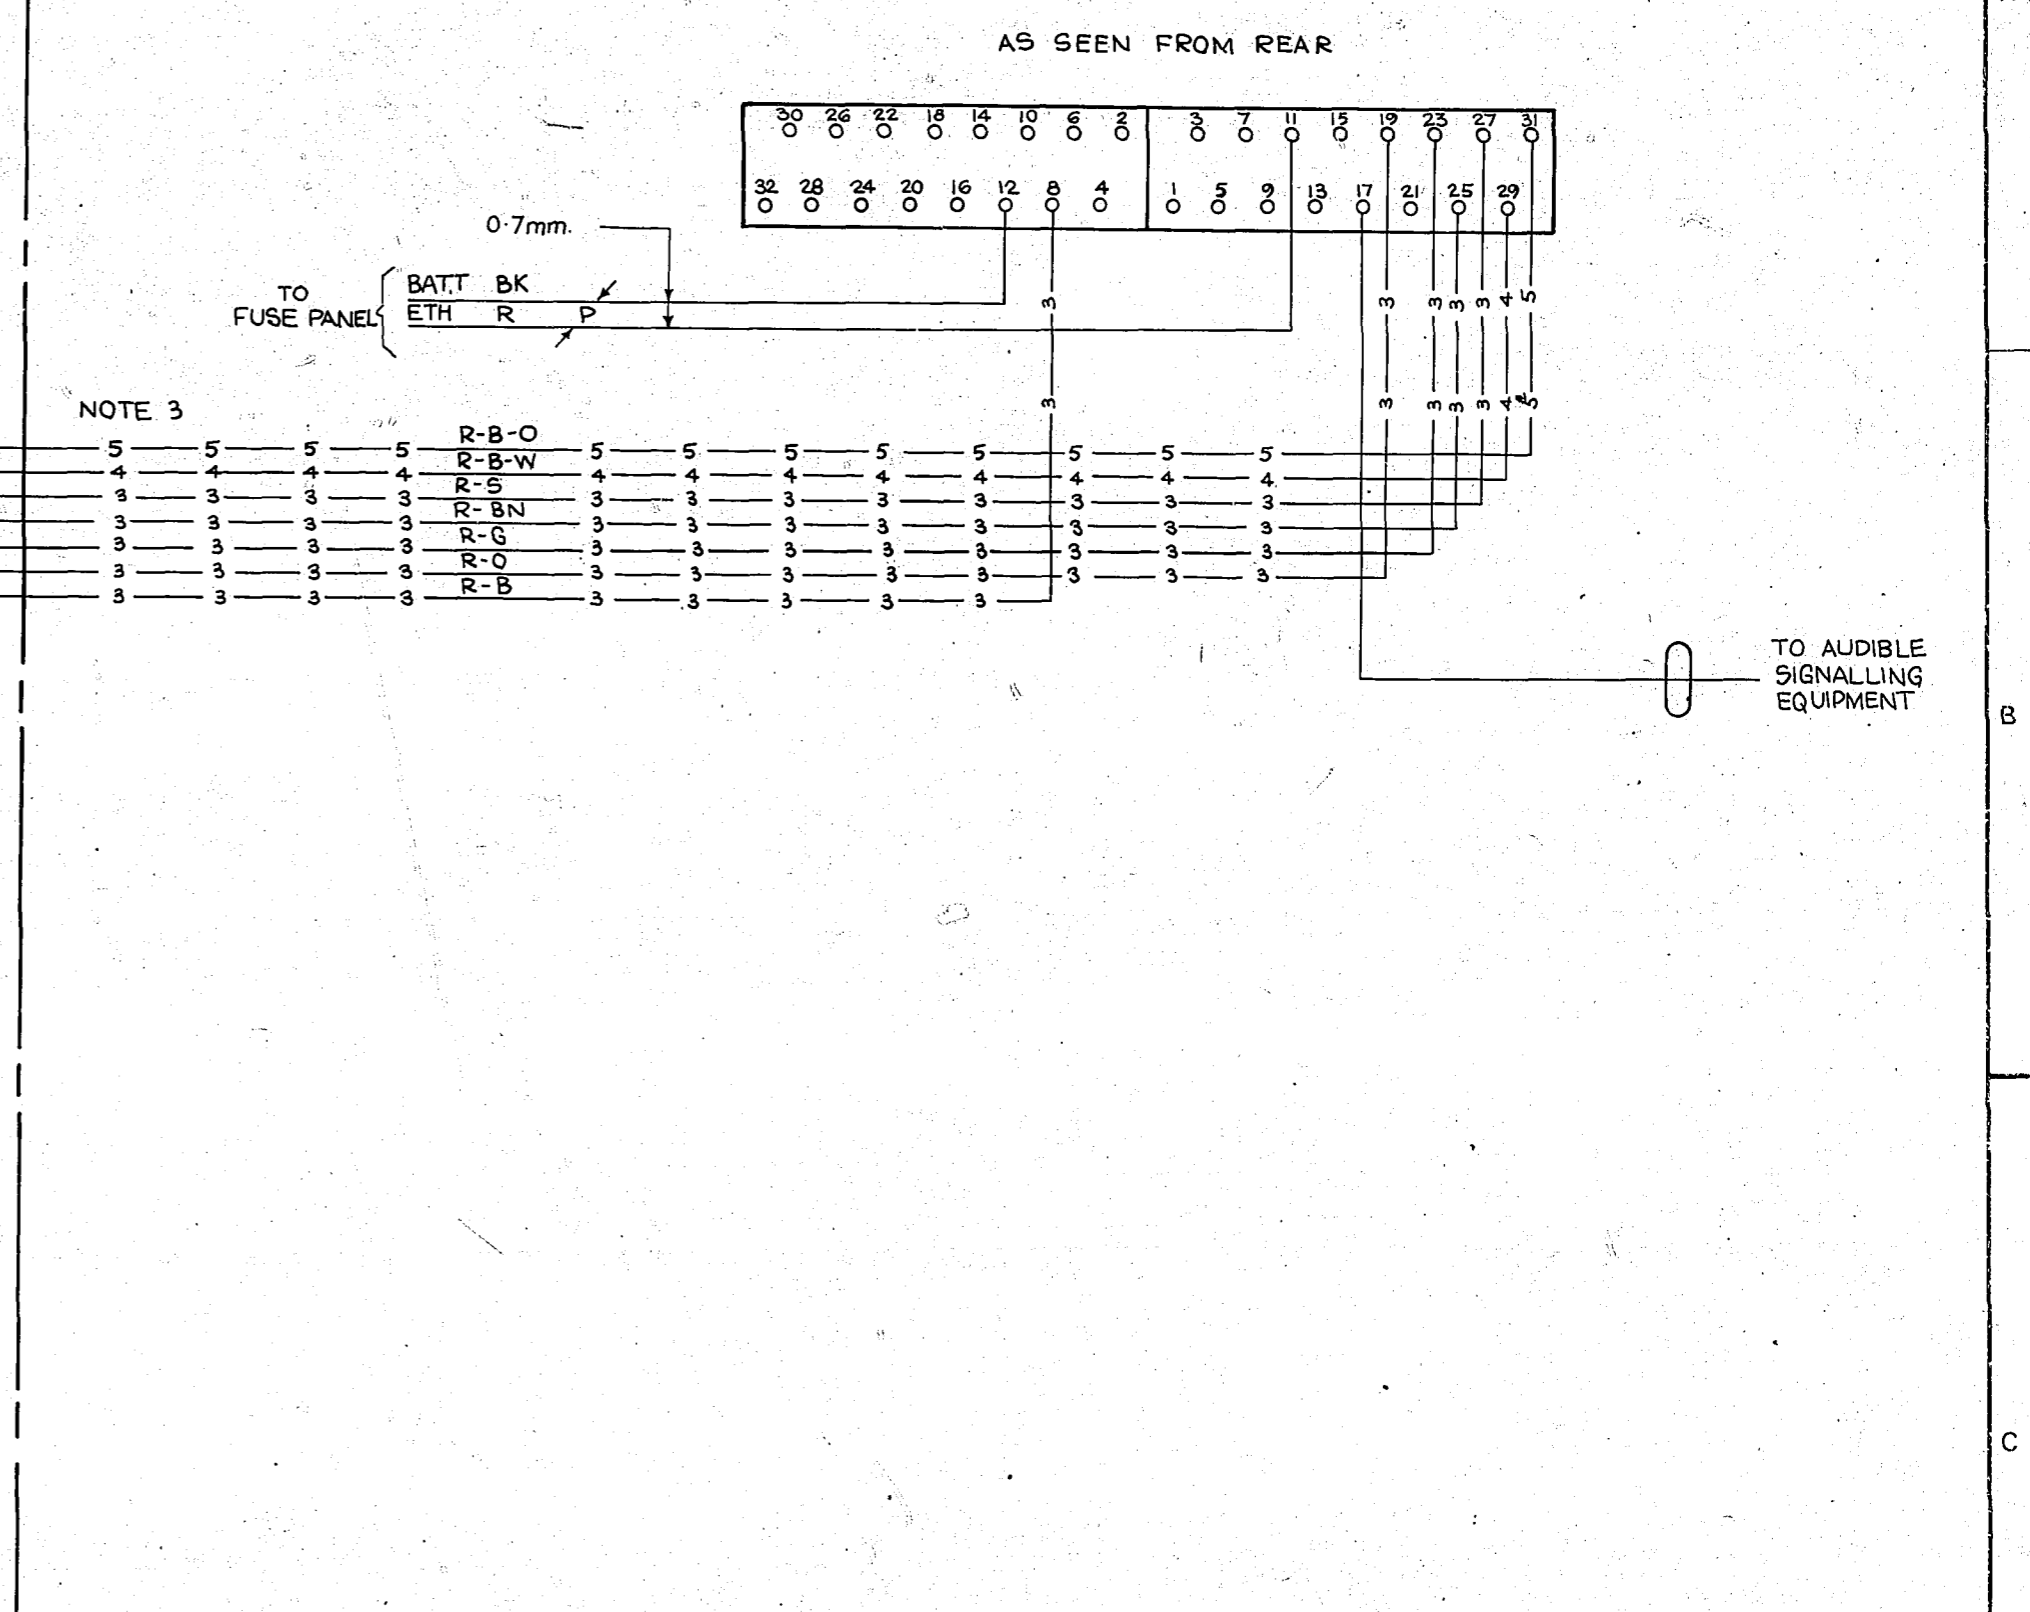

NOTES

- FIG. 1  
U POINTS 9-11 MAKE CONTACT WHEN RELAY SET IS REMOVED.
- ON 300 TYPE CUT STRAPS +&+ AND H&H OF SELECTED EXTENSION LINE CCT. AND CONNECT STRAPS SHOWN — 1 — 1 —  
ON 120, 135 & 149 TYPES CUT STRAP H&C AND SLEEVE 002 AND CD3 CONTACT UNITS OF SELECTED EXTENSION LINE CCT AND CONNECT STRAPS — 2 — 2 —
- WHEN AUDIBLE SIGNALLING IS EMPLOYED:-  
STRAP — 3 — 3 — FOR 3 UNIT SYSTEM (8 CODES)  
STRAP — 3 — 3 — AND — 4 — 4 — FOR 4 UNIT SYSTEM (15 CODES)  
STRAP — 3 — 3 — — 4 — 4 — AND — 5 — 5 — FOR 5 UNIT SYSTEM (25 CODES)
- WHEN VISUAL SIGNALLING IS EMPLOYED:-  
STRAP — 6 — 6 — FOR 3 LAMP DISPLAY (7 CODES)  
STRAP — 6 — 6 — AND — 7 — 7 — FOR 4 LAMP DISPLAY (14 CODES)  
STRAP — 6 — 6 — — 7 — 7 — AND — 8 — 8 — FOR 5 LAMP DISPLAY (25 CODES)
- WHEN AUDIBLE WARNING OF VISUAL CODE IS USED:-  
STRAP — 9 — 9 — FOR SINGLE STROKE BELL.  
STRAP — 10 — 10 — FOR CONTINUOUS RINGING BELL
- ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
- USE COLOURS SHOWN IN BRACKETS FOR 300 TYPE.

50V W

CODE CALL CIRCUIT  
(25 VISUAL AND/OR AUDIBLE CODES)  
120, 135, 149, AND 300 TYPE PABX'S

DRN T-EQPT	CKD -	ORIGIN T-EQPT
TCD N S	APPD GID	STANDARD ATW22001
NZPO ENGINEER-IN-CHIEF WELLINGTON		
SHT 1 of 1	SIZE A2	CRU16860

A	29.5.80	NS	RIL 157657	VBJ	VBJ	RETRACED & METRICATED
A	6.5.89	SEP	8944	GID		CHANGE