


AS SEEN FROM REAR

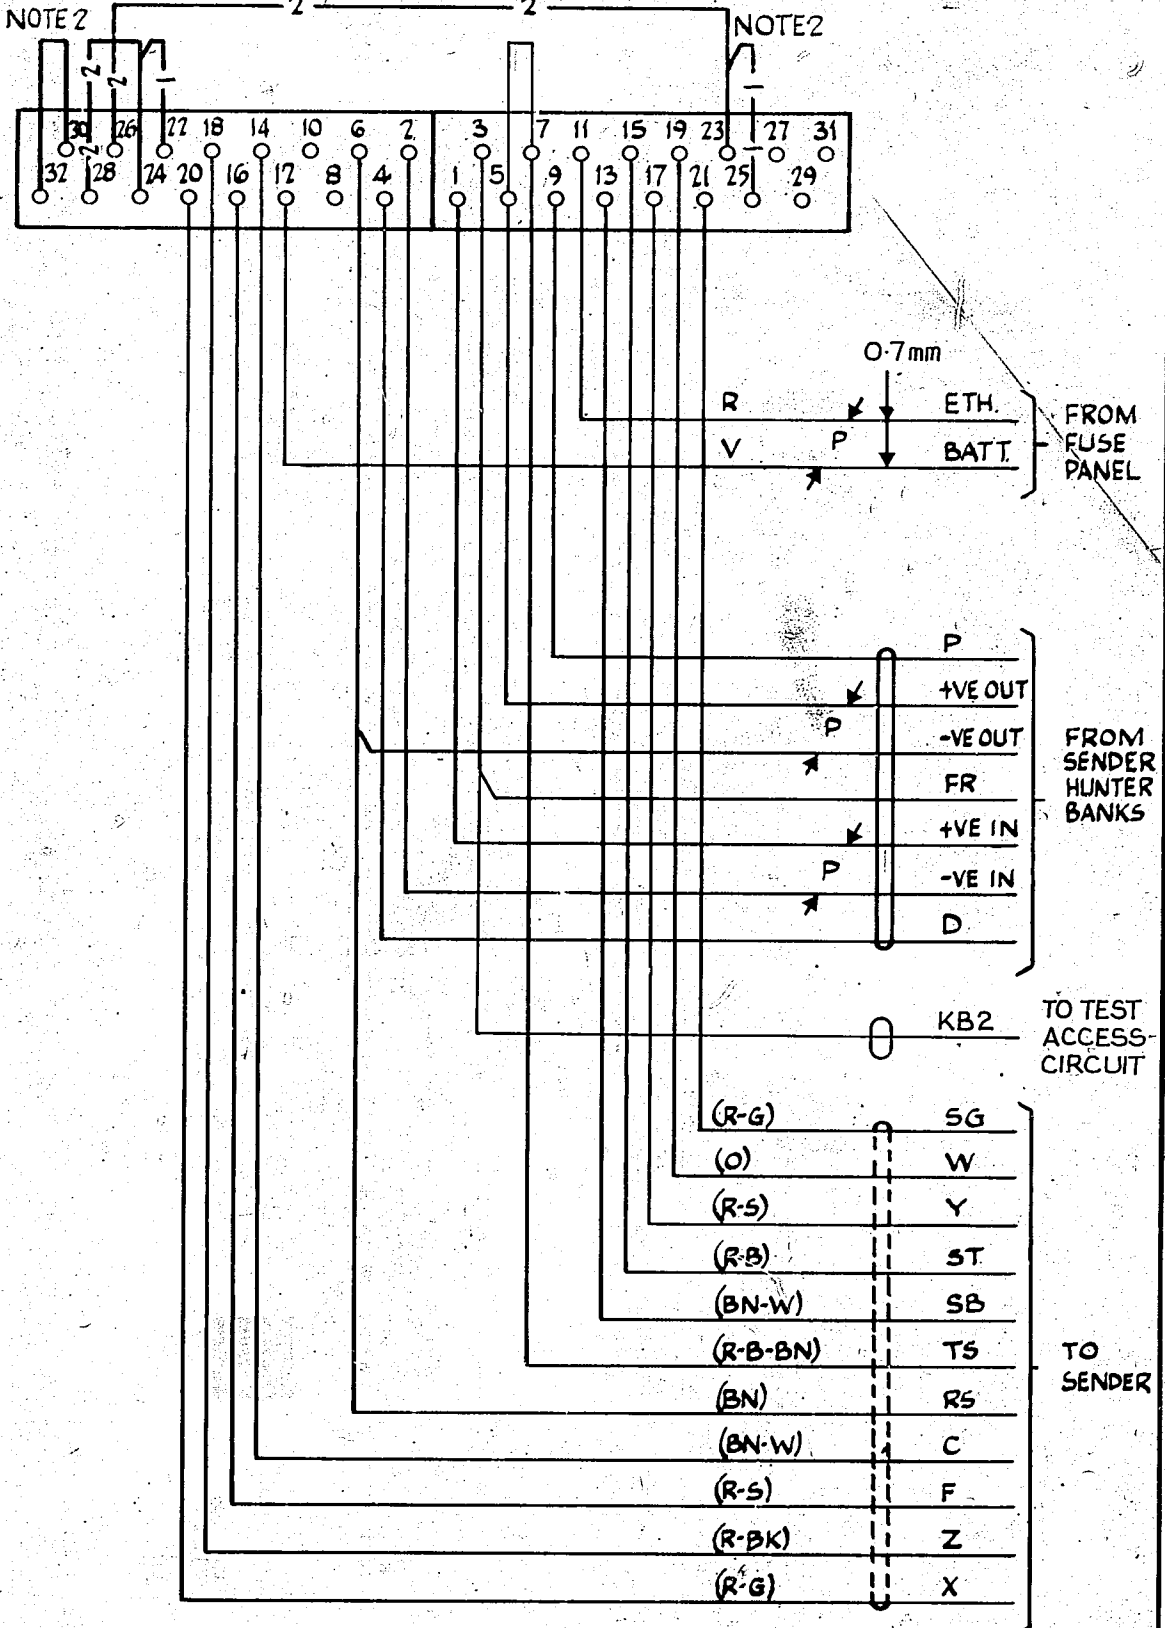

NOTES

- 1 ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
- 2 STRAPS SHOWN THUS -1-1-1- FOR OPERATORS POSITION FOR TEST POSITION DELETE WIRING SHOWN THUS -1-1- AND ADD WIRING SHOWN THUS -2-2- FROM U26 TO U23 & U28 TO U24.

| | | | | | | | |
|--|--|-------|--------------|--|---------|-----------|--------|
| | | | | SENDER CONVERSION RELAY SET INTERNATIONAL EXCHANGE. 2000 TYPE. | | | |
| U5 & U7 WERE NOT STRAPPED. WIRE SIZES METRICATED (68451) | | 3 | 22.5-75 | BS-H | | | |
| LEAD TO TEST ACCESS CCTS ADDED | | 2 | | | | | |
| | | 1 | | | | | |
| AMENDMENT PARTICULARS | | | ISSUE | DATE | APPD | REF | SIZE F |
| | | | | | | | 50v. H |
| NZPO | | DRAWN | CHKD | WIRING | CIRCUIT | GBU 16930 | |
| | | T.C. | N.L. 29/1/68 | N/A. | | | |

5 Centimetres

15

20

25

30