


F.U. HAWERA ONLY

SHOWN FOR EXPLANATORY PURPOSES ONLY

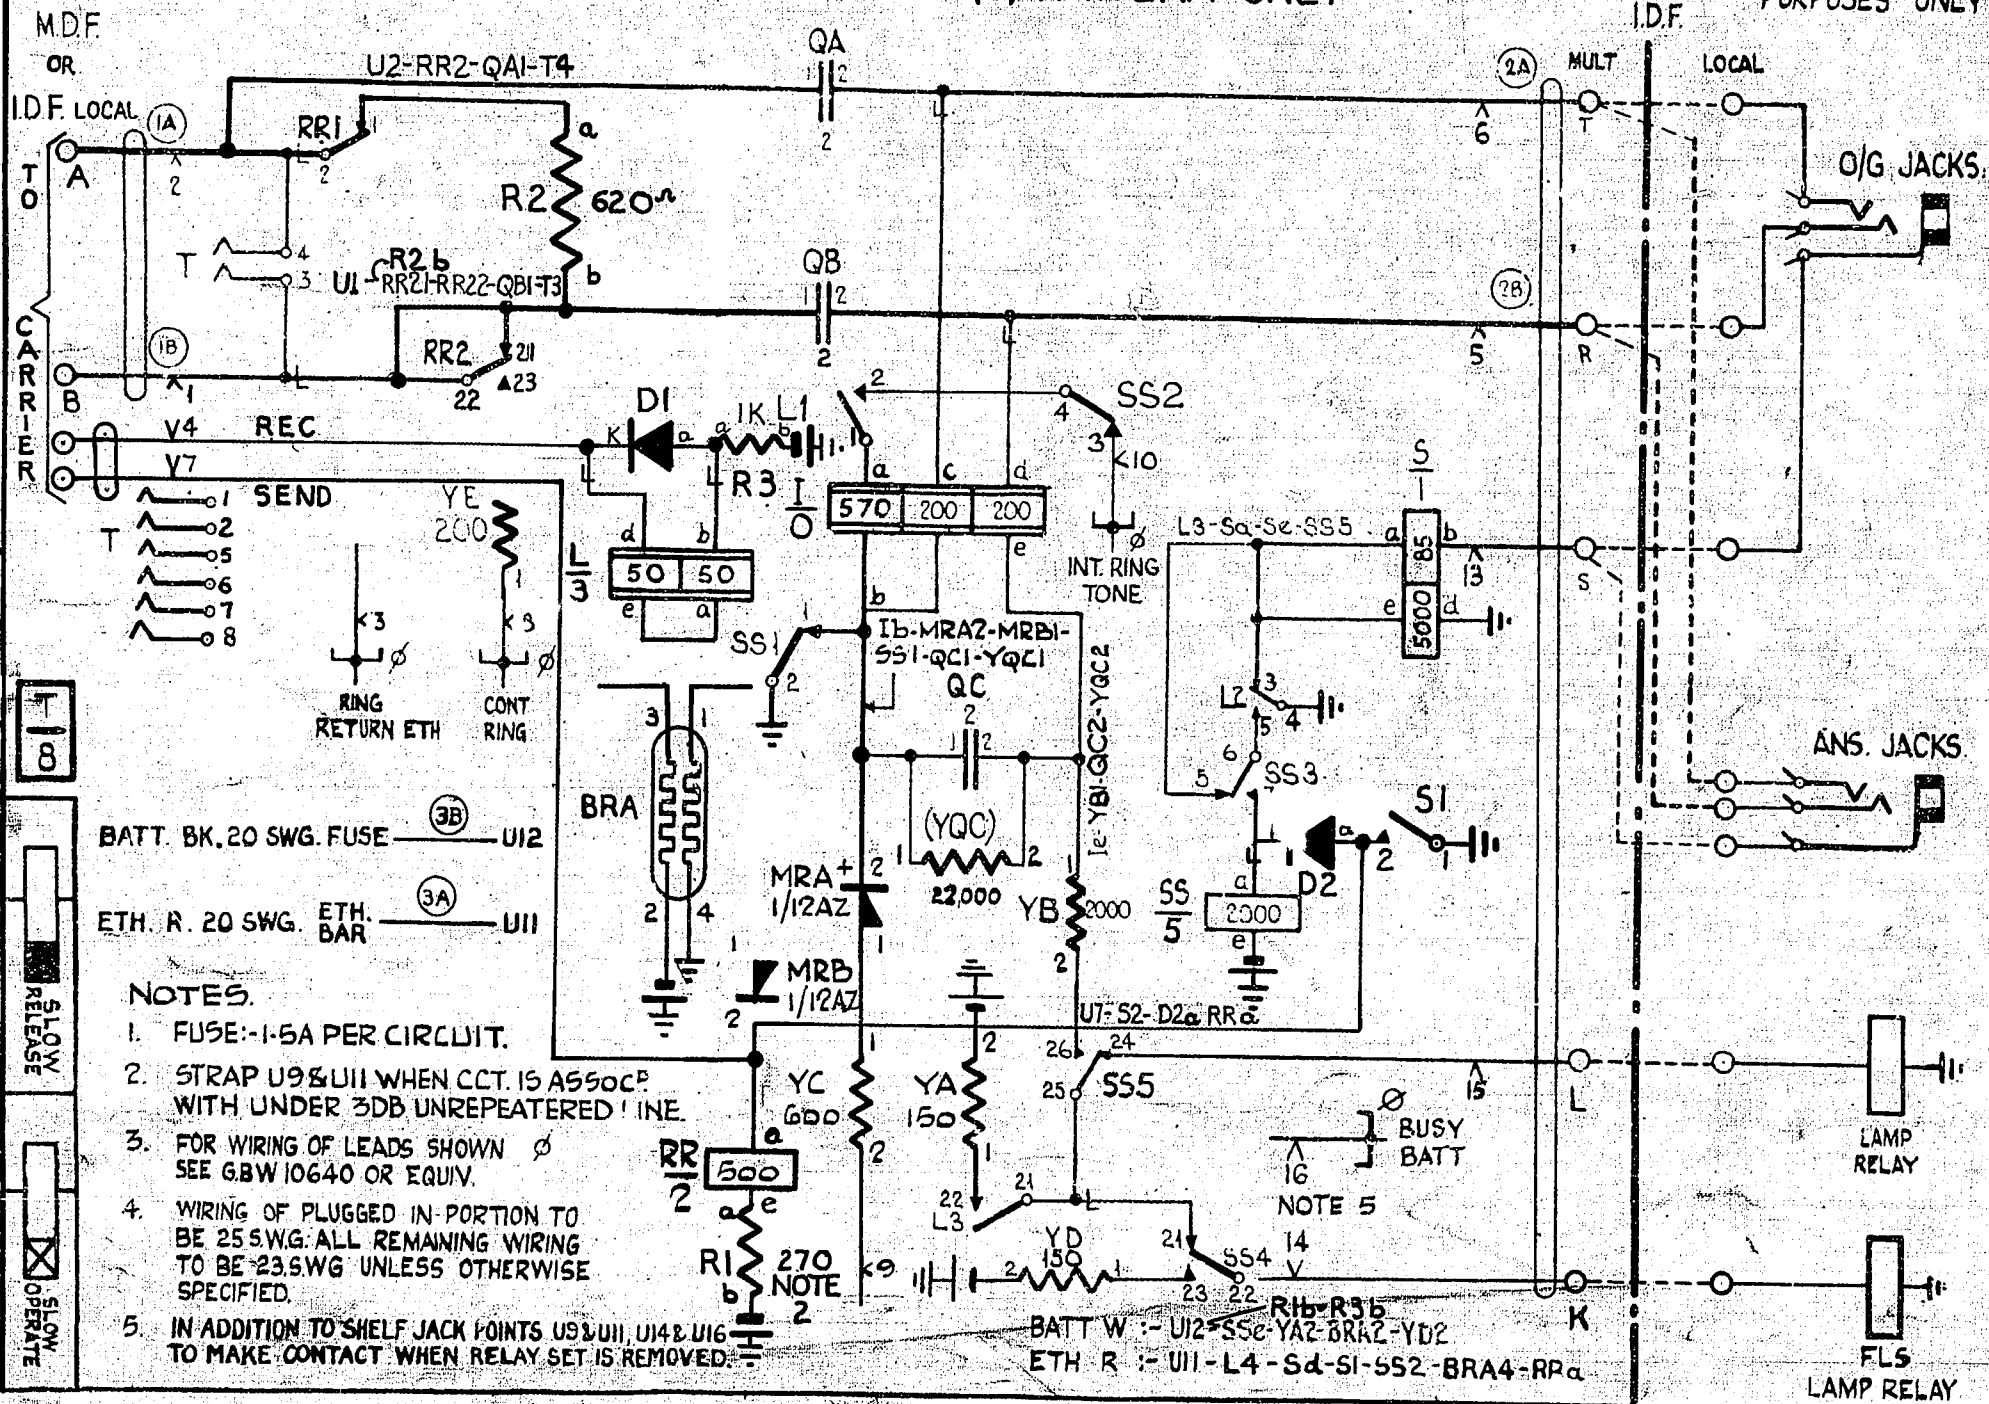

BATT. BK. 20 SWG. FUSE — (3B) — U12
 ETH. R. 20 SWG. ETH. BAR — (3A) — U11

- NOTES.**
1. FUSE:-1.5A PER CIRCUIT.
 2. STRAP U9&U11 WHEN CCT. IS ASSOC'D WITH UNDER 3DB UNREPEATERED LINE.
 3. FOR WIRING OF LEADS SHOWN \emptyset SEE GBW 10640 OR EQUIV.
 4. WIRING OF PLUGGED IN-PORTION TO BE 25 SWG. ALL REMAINING WIRING TO BE 23 SWG UNLESS OTHERWISE SPECIFIED.
 5. IN ADDITION TO SHELF JACK POINTS U9&U11, U14&U16 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.

10

RELEASE

OPERATE

SLEEVE CONTROL SYSTEM
 TRUNK SUBSCRIBER C.B.
 WITH BALLAST RESISTANCE
 2000 TYPE

AMENDMENT PARTICULARS	ISSUE	DATE	APPR
MODIFIED FOR USE SKILMAN CARRIER (86320)	A	30.9.69	RC

NZPD
 DRAWN
 CHECKED
 WIRING
 CIRCUIT
 GBW 13050 MOD B