


- NOTES:-**
1. FUSE:- 1.5A PER CIRCUIT
 2. U9 & U11 TO BE STRAPPED WHEN C.C.T. IS ASSOCIATED WITH AN UNDER 3DB UNREPEATED LINE
 3. IN ADDITION TO SHELF JACK POINTS U9 & U11, U14 & U16 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
 4. Ø FOR WIRING SEE GBW 10640 OR EQUIV.
 5. ALL WIRING TO BE 0.5mm., UNLESS OTHERWISE SPECIFIED
 6. WHEN USED IN CONJUNCTION WITH GBW 15310 S/C C3, DISCONNECT CONT. RING & RING RETURN & CONNECT U8 TO BATT. & U3 TO EARTH.

BATT. BK. 0.7mm. FUSE 3B U12
 EARTH R. 0.7mm. ETH BAR 3A U11

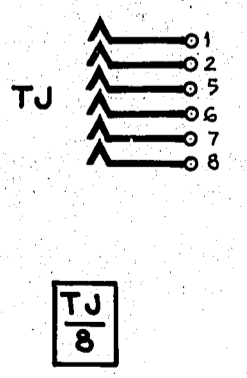

BATT. W. - U12-R1b-R3b-LRc-MMe-LFe-SSe-R6b-R7b
 EARTH R. - U11-L1-LLa-Sd-S1-Md-MI-TR/E-LF1-RRa-SS22-SS25-R5a

 SLOW RELEASE SLOW OPERATE

**SLEEVE CONTROL SYSTEM
 TRUNK SUBSCRIBER
 B/W MAGNETO
 2000 TYPE.**

9	27.4.81	SWC AKL	17194		RETRACED & METRICATED
8	10.5.58		10515		NOTE 6 & REFS. ADDED.
7					R8 WAS NOT SHOWN
6					JUMPERING TO ANS JACKS MOD.
5					WIRING MOD.
4					MR2 WAS 2/12A, MRS WAS
3					NOT SHOWN
2					DR RELAY DEL. ETC.
1					TITLE CHANGED
					MRS DEL. MR2 CHANGED TO 2/12A

ISS	DATE	DEL	DC	ORDER	CKD	APD	CHANGE
DRNT-EQPT	CKD	ORIGIN T- EQPT					
TCD L.N.	APPD	STANDARD ATW 22001					
NZPO ENGINEER-IN-CHIEF WELLINGTON							
SHT OF 1		SIZE A2		GBW13060			

PROOF

UD 236

