

TELEPHONE SETS

621 TYPE

CONNECTIONS

1.00 GENERAL

1.01 This section covers connections for 621A1 and 621A2 telephone sets. These sets, which are used on 701B PBX systems, enable an attendant to receive and complete calls through connecting circuits.

1.02 Attendant inserts plug of headset or handset into *C* and *D* jacks to receive calls. *A* and *B* jacks are provided for service assistant's use. Removing headset or handset from *C* and *D* jacks makes the position busy to incoming calls.

1.03 Illuminated trunk keys provide the attendants with a means of establishing connections between the telephone set and incoming calls. Keys light to indicate trunk seizure or a hold condition. Green trunk lamps are provided to indicate incoming calls, transferred calls, and trunk supervision. White station lamps are provided to indicate busy, ringing, camp-on, and station supervision. All lamps are 51A except calls waiting lamp and RDY lamp which are 2Y lamps.

1.04 Capacity of the 621A1 telephone set is 10 trunk keys, 10 trunk lamps, and 10 station

lamps. Capacity of the 621A2 telephone set is 20 trunk keys, 20 trunk lamps, and 20 station lamps.

2.00 INDEX FOR CONNECTION FIGURES

Fig. 1 — Attendant Telephone Circuit

Fig. 2 — Miscellaneous Position Keys

Fig. 3 — Pushbutton Dial

Fig. 4 — Common Position Keys

Fig. 5 — Trunk Lamps and Station Lamps
1 to 10

Fig. 6 — Trunk Keys and Key Lamps 1
to 10

Fig. 7 — Trunk Lamps and Station Lamps
11 to 20


Fig. 8 — Trunk Lamps and Station Lamps
11 to 20

Table A — Connections for 621A Telephone
Set, Blue Served Unit of Con-
nector Cable

Table B — Connections for 621A Telephone
Set, Orange Served Unit of Con-
nector Cable

Table C — Connections for 621A Telephone
Set, Green Served Unit of Con-
nector Cable


JACKS

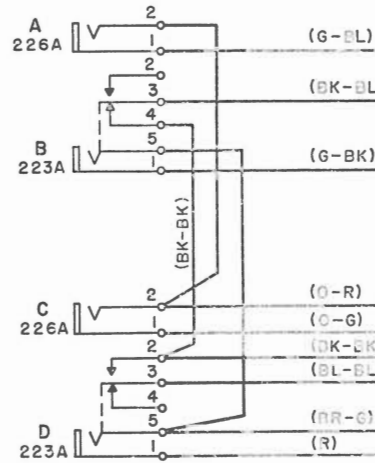

LAMP CALLS WAITING



LOUDSPEAKER P-12E987




VOLUME CONTROL KS-16100




KEY AUDIBLE SIGNAL


ON OFF

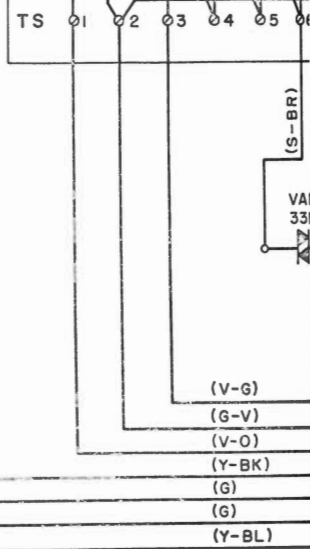

VAI
331

NETWORK ASSEMBLY
P-11E531

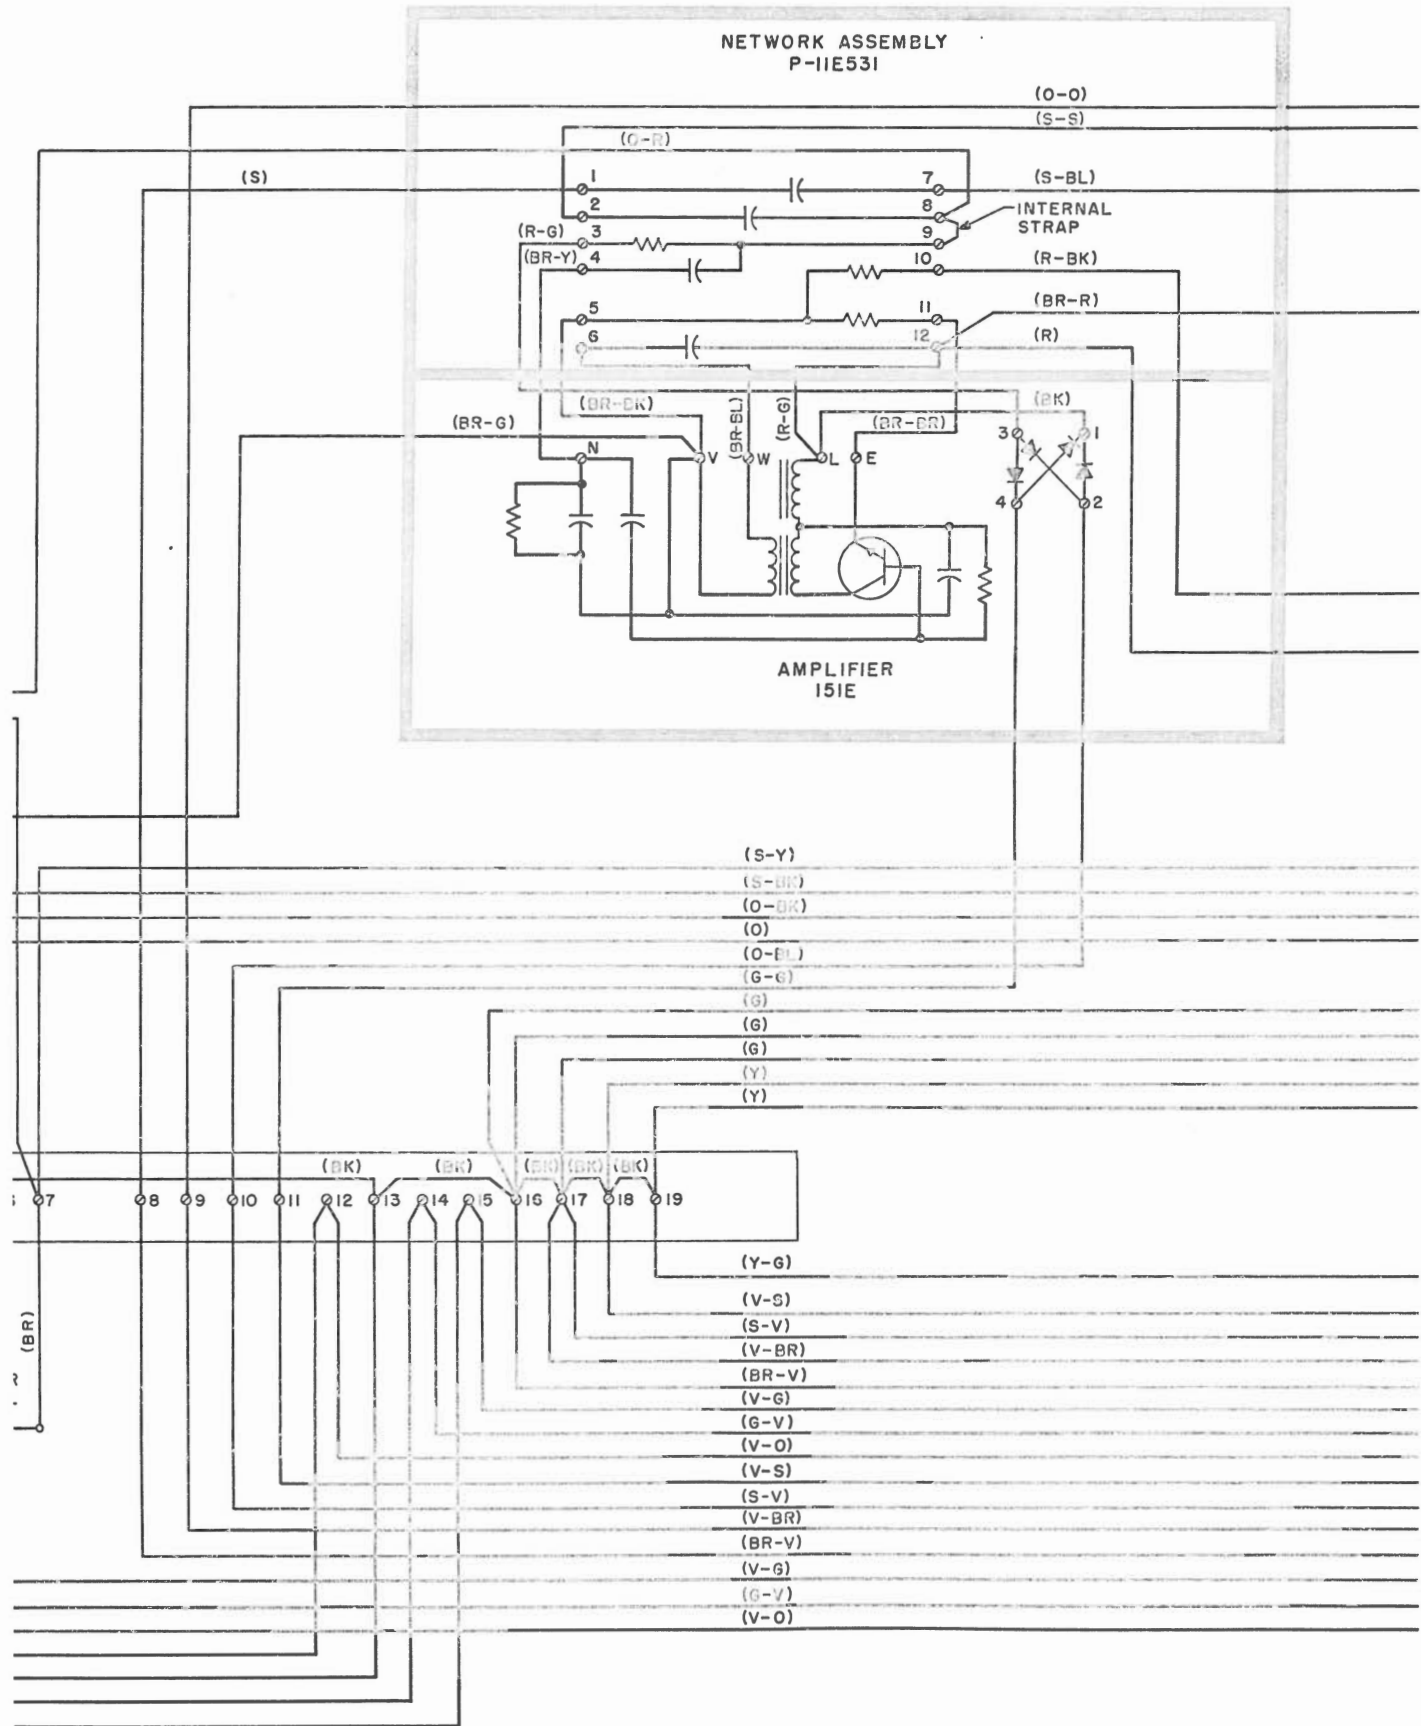


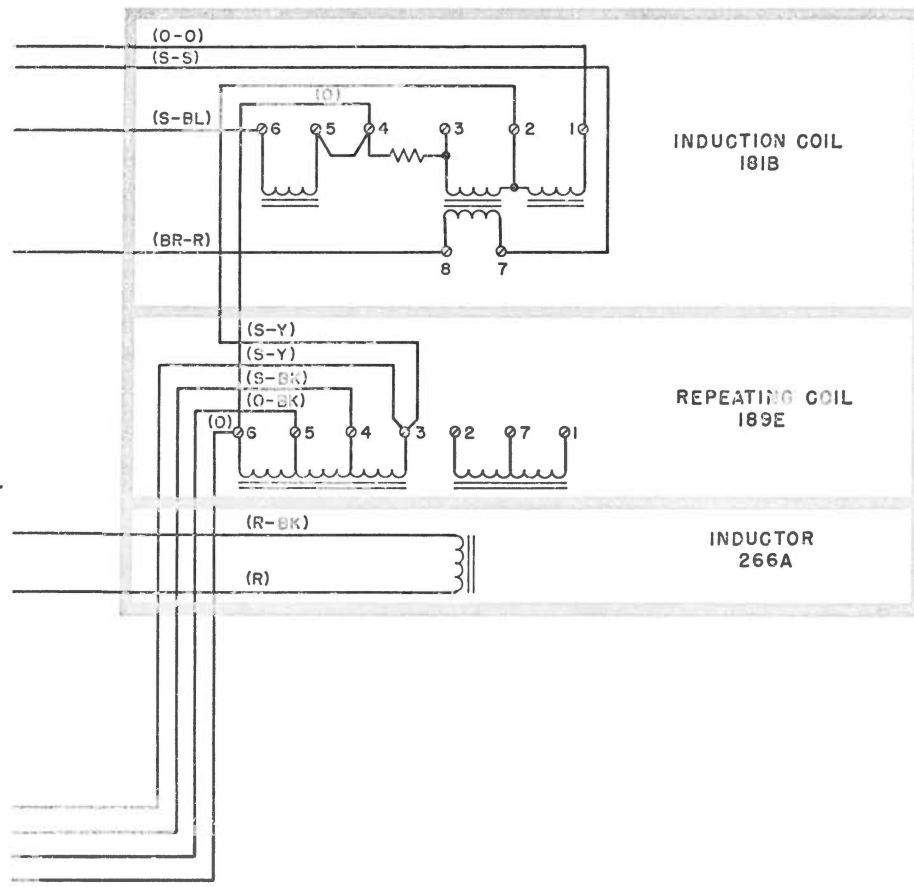

(G)	GA7	TO FIG. 2
(G)	GA5	TO FIG. 3
(G)	GA5	TO FIG. 4
(Y)	GA1	TO FIG. 8
(Y)	GA3	TO FIG. 6

MOUNTING CORD DI50B		
(Y-G)	G6	TO TABLE C
(V-S)	G5	TO TABLE B
(S-V)	G4	
(V-BR)	G3	
(BR-V)	G1	
(V-G)	NA1	TO TABLE A
(G-V)	NA	
(V-O)	L	
(V-S)	G	
(S-V)	B	TO TABLE A
(V-BR)	T	
(BR-V)	R	
(V-G)	JK	
(G-V)	G2	
(V-O)	JK1	

Fig. 1 — Attendant Telephone Circuit

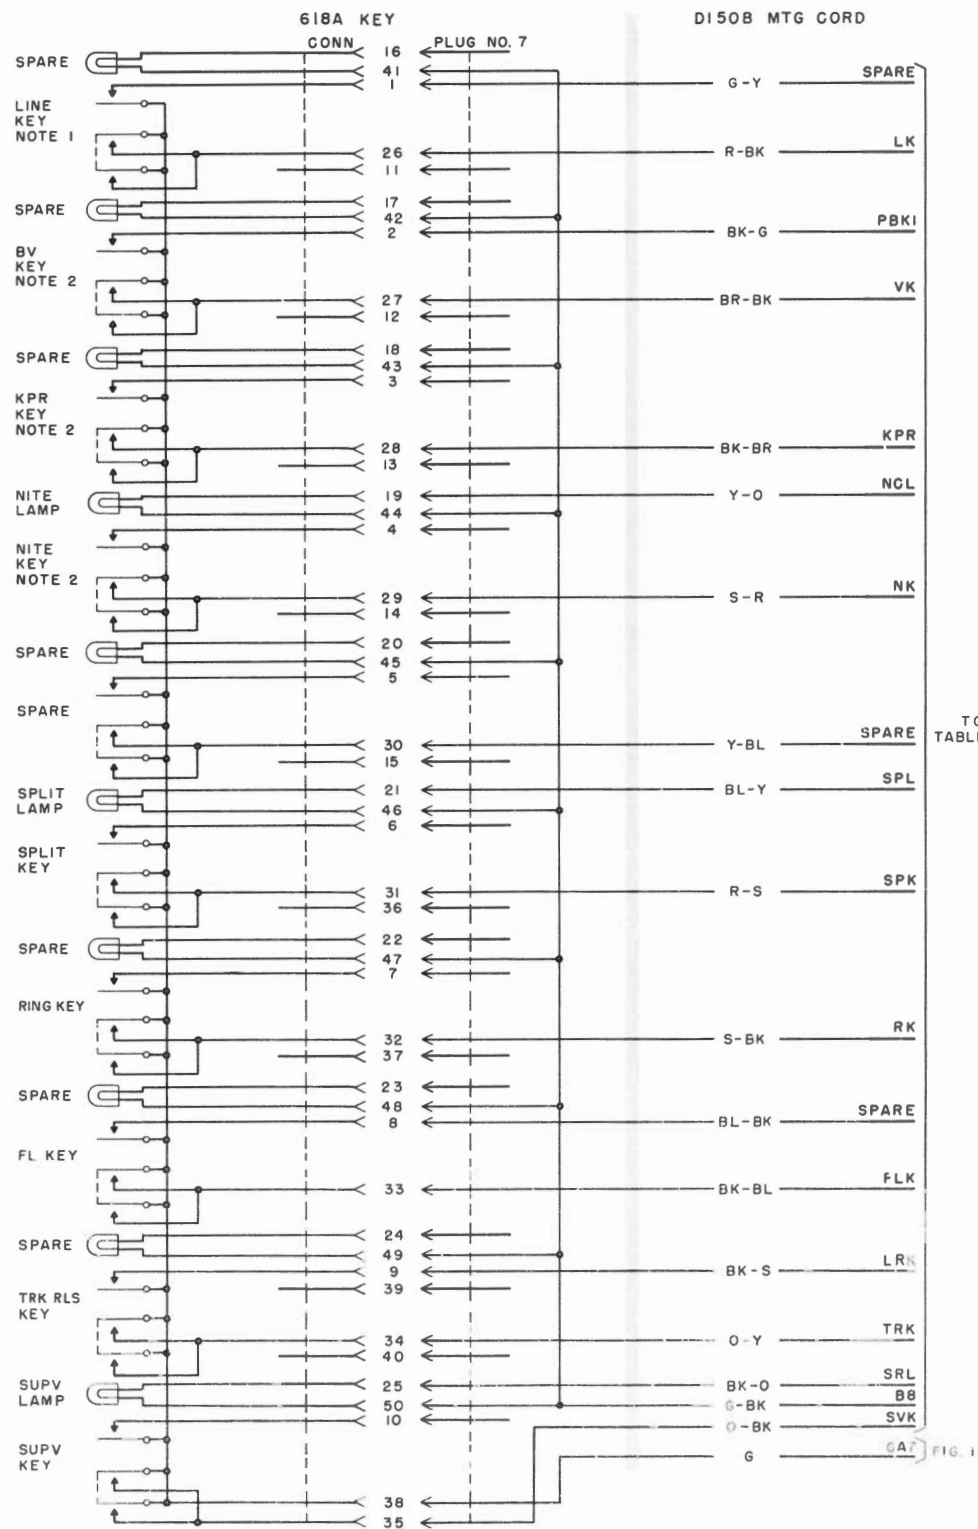

Note 1: Designate on regular position only.

Note 2: Designate on special position only.

Fig. 2 — Miscellaneous Position Keys

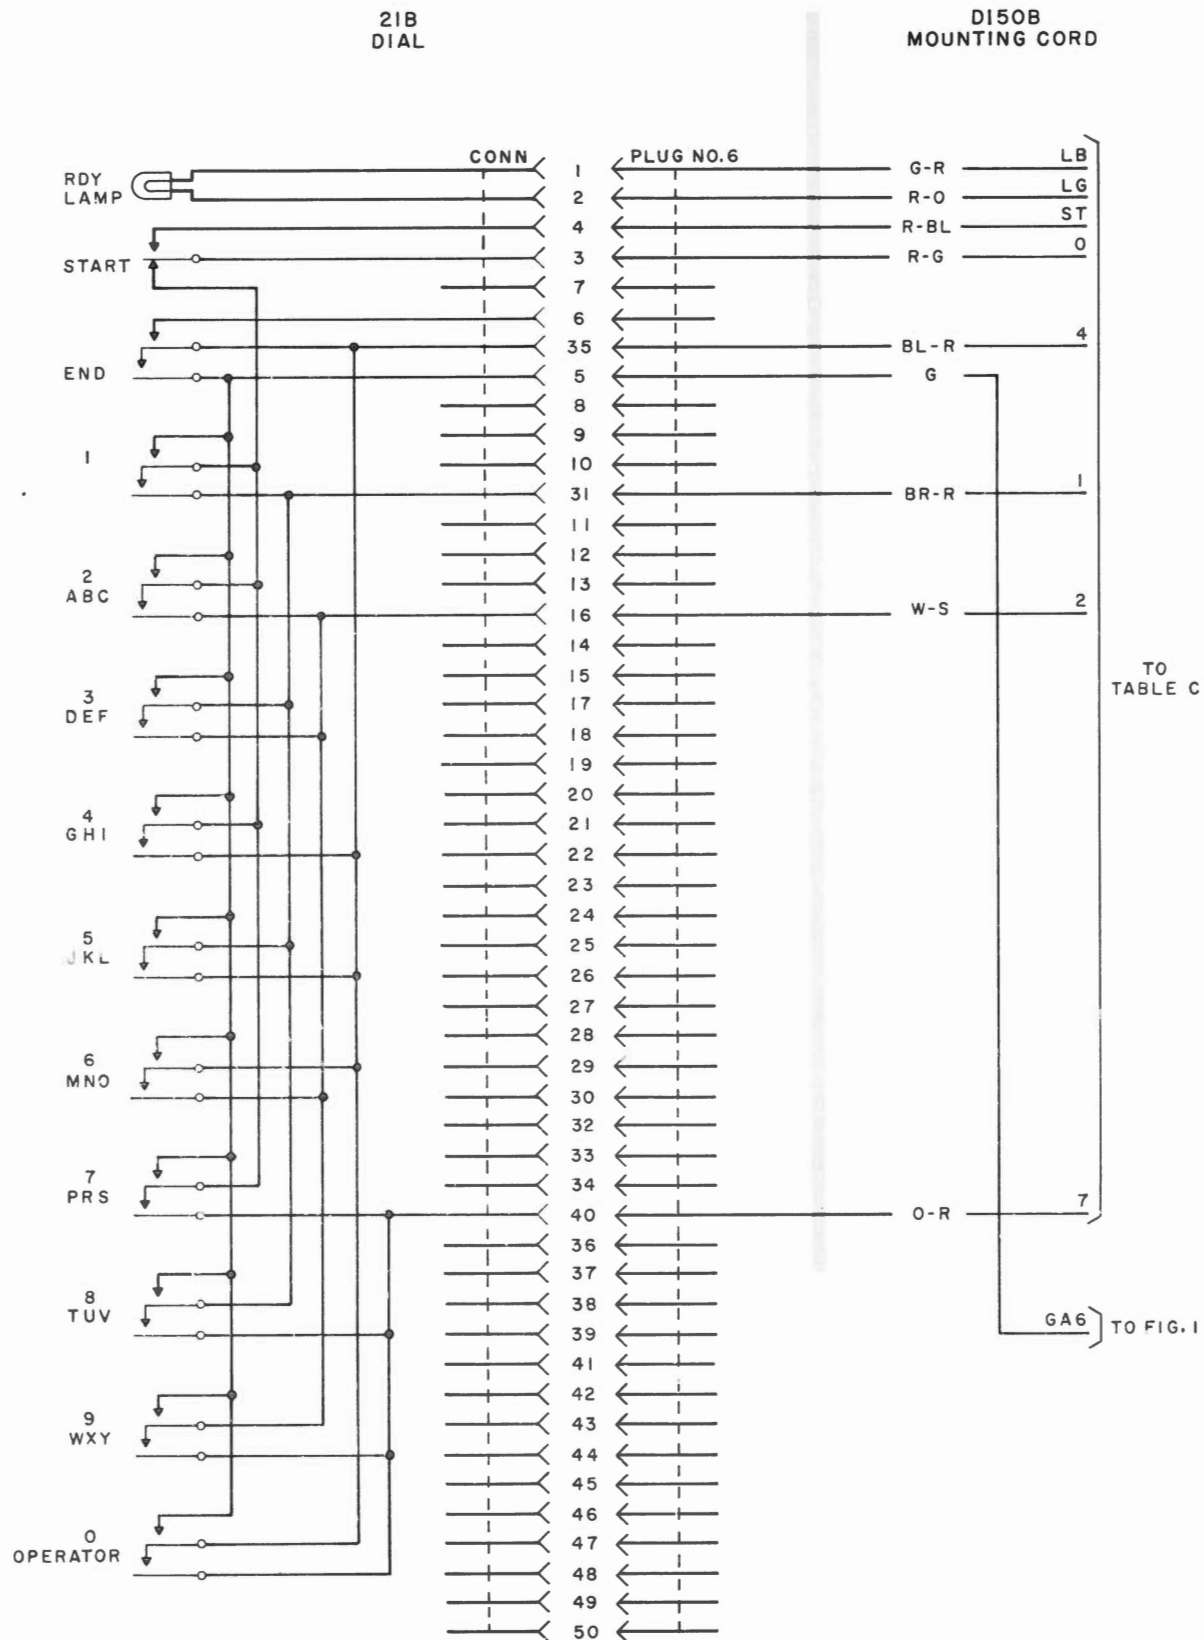


Fig. 3 — Pushbutton Dial

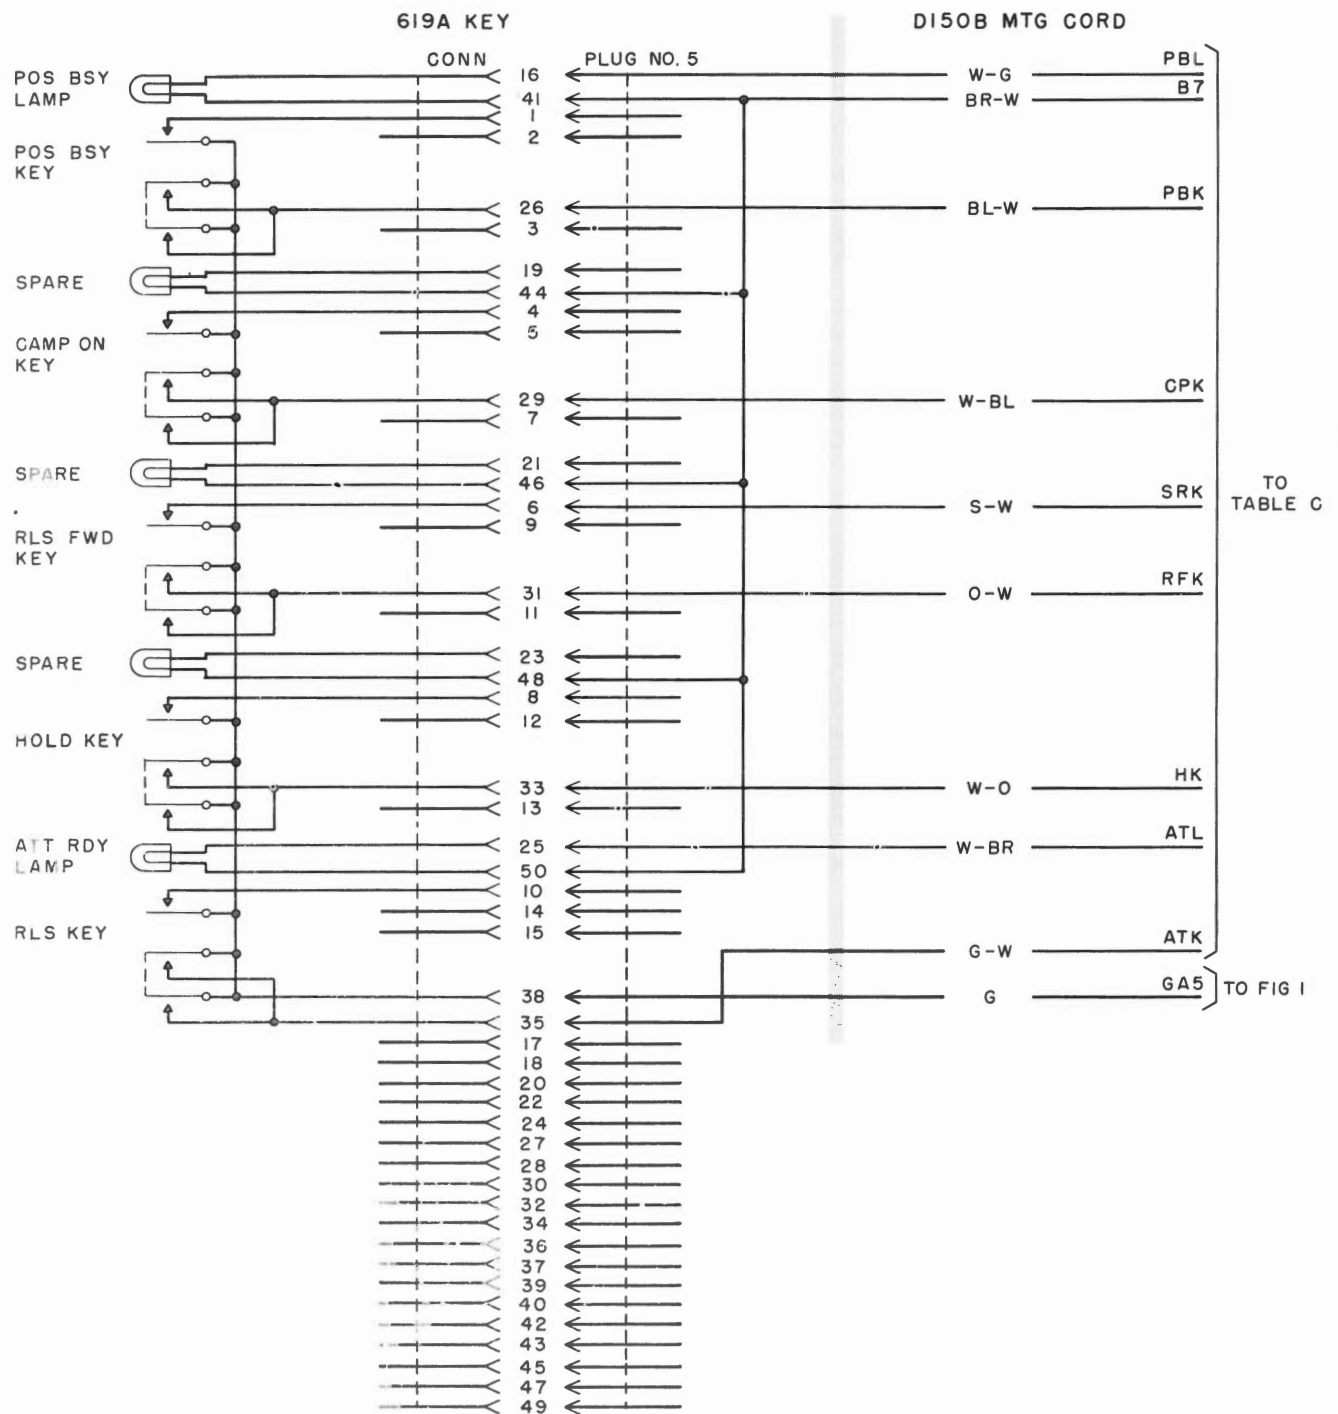


Fig. 4 — Common Position Keys

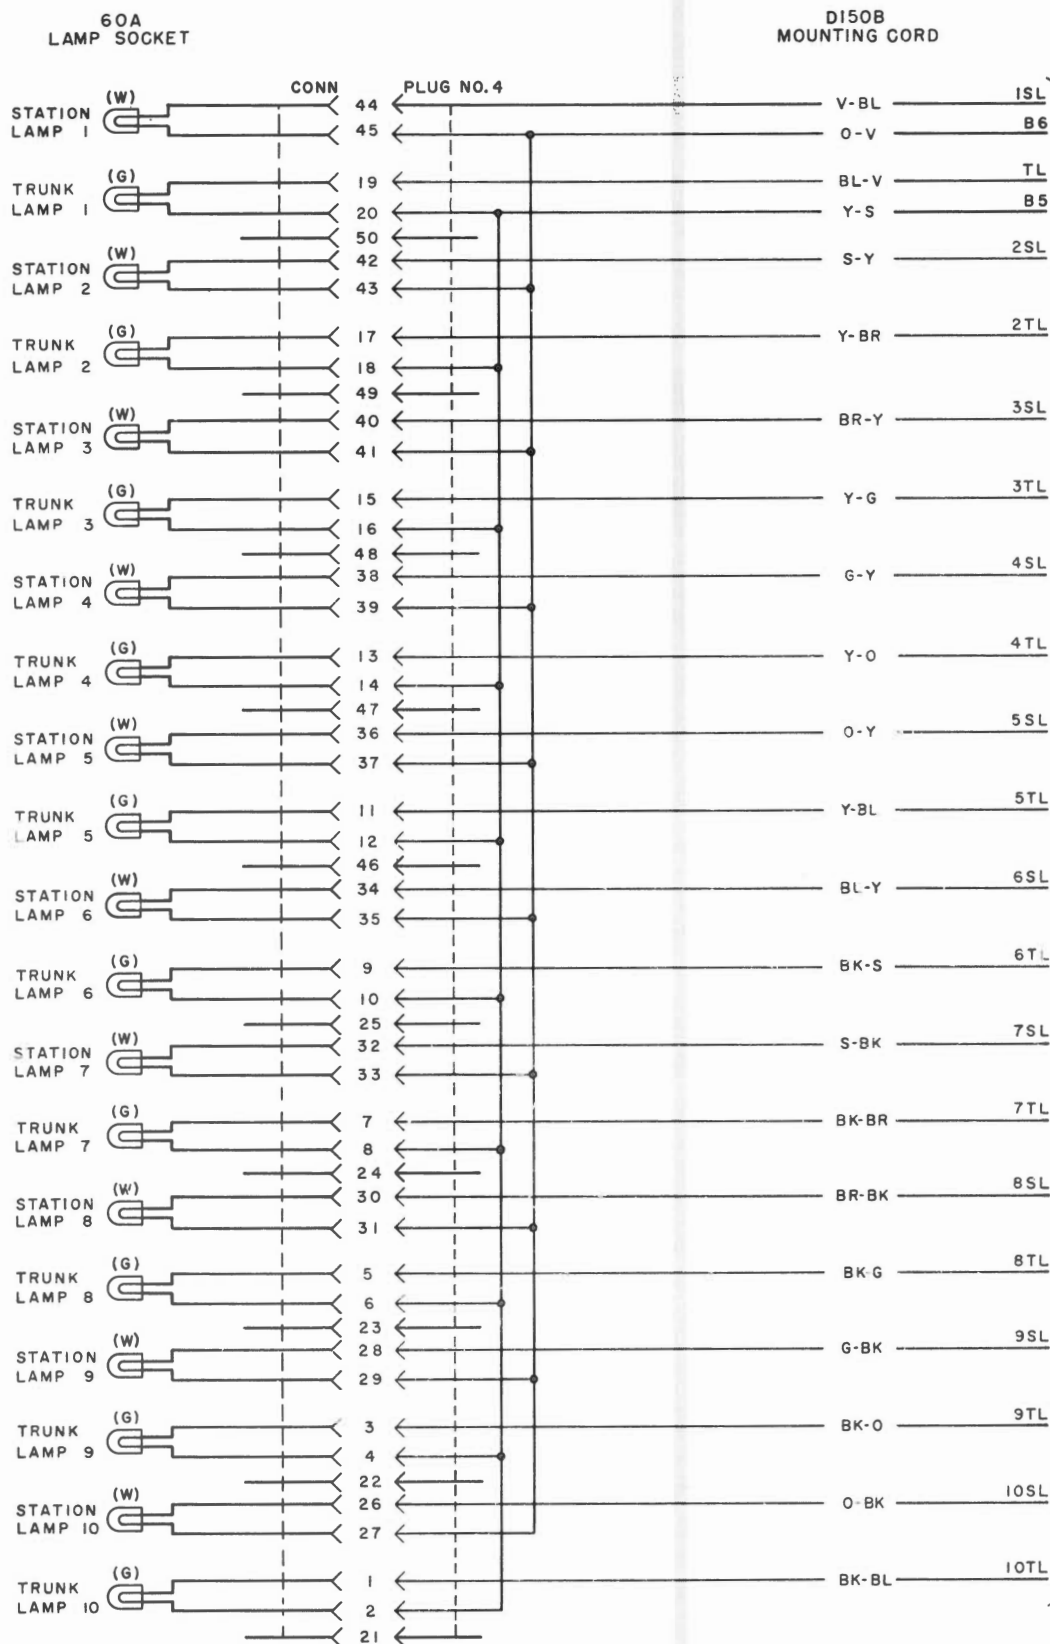


Fig. 5 – Trunk Lamps and Station Lamps 1 to 10

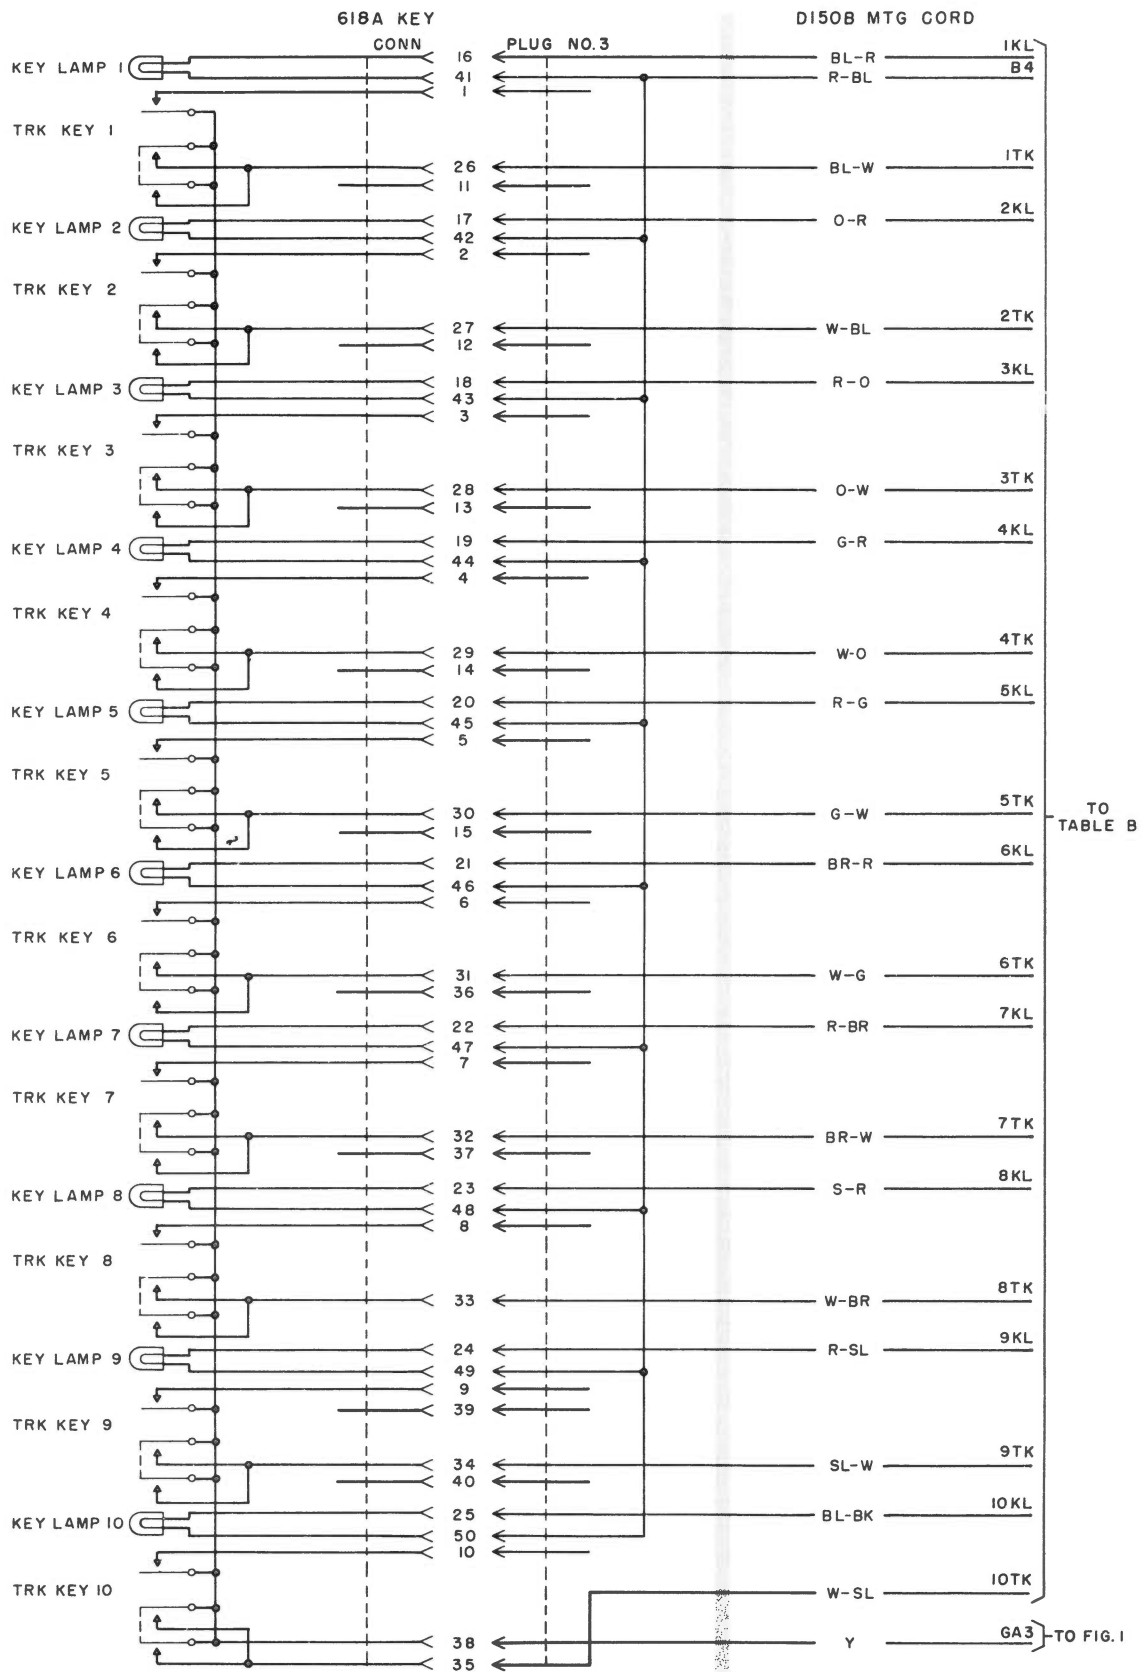


Fig. 6 – Trunk Keys and Key Lamps 1 to 10

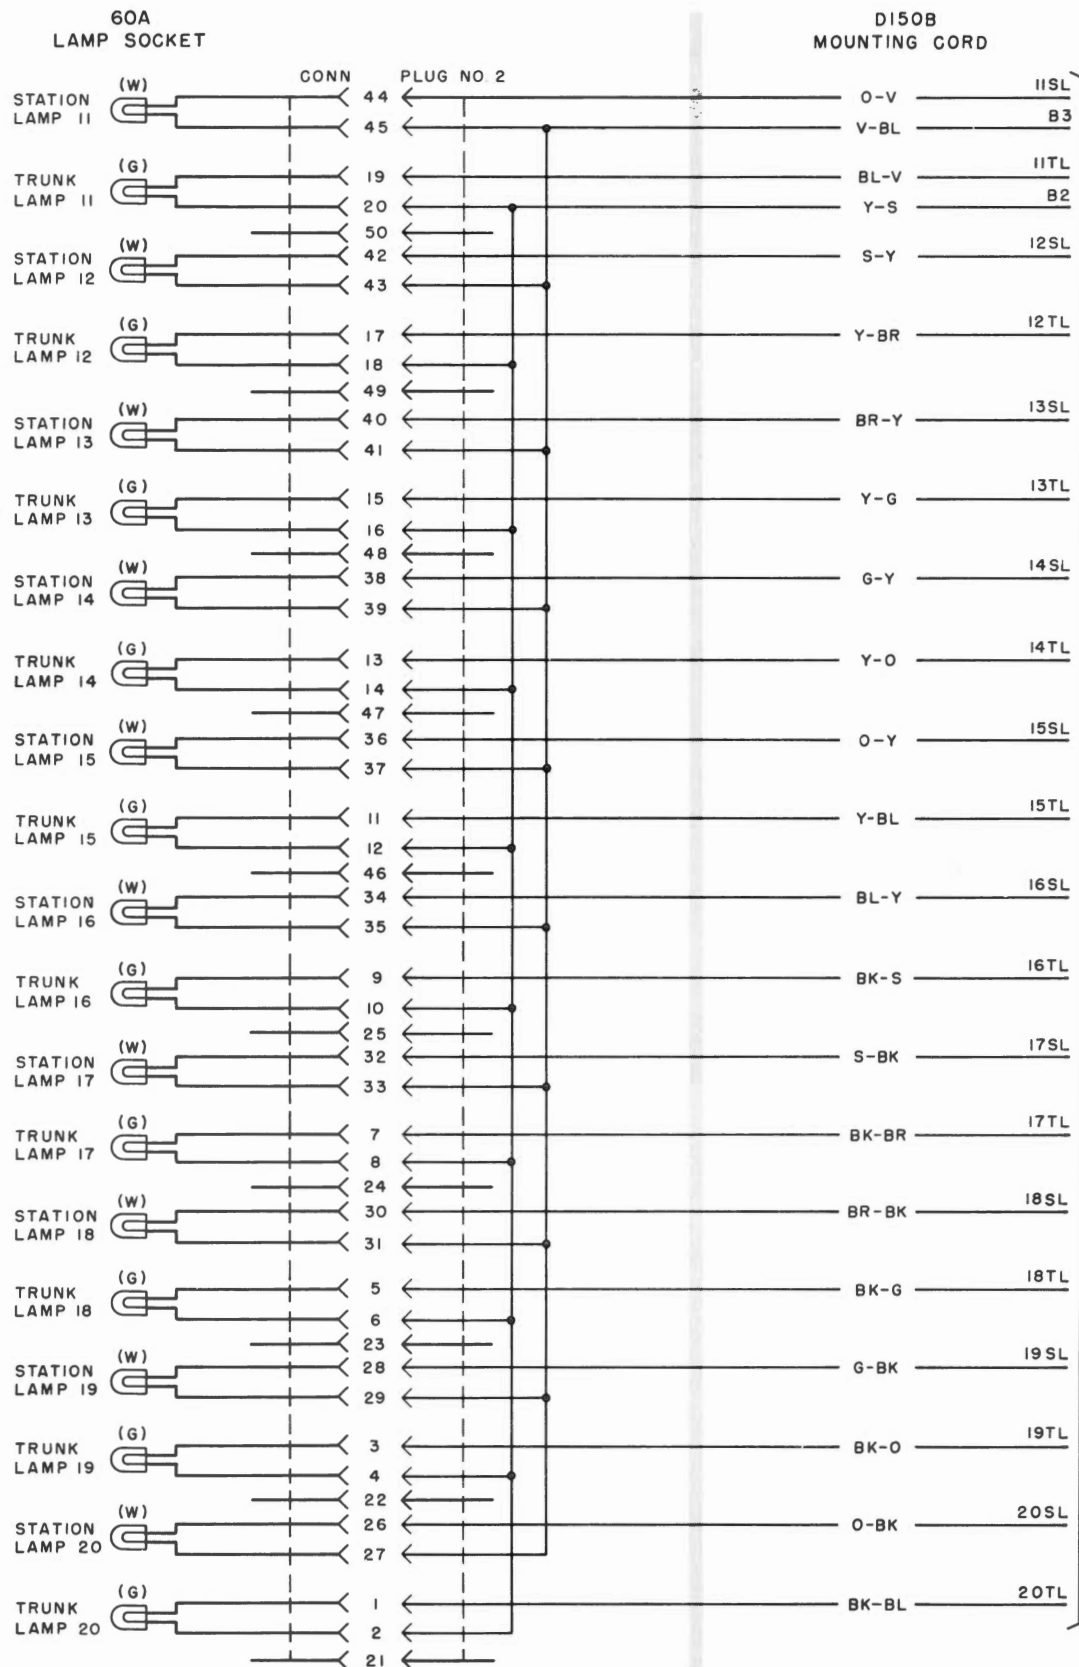


Fig. 7 — Trunk Lamps and Station Lamps 11 to 20

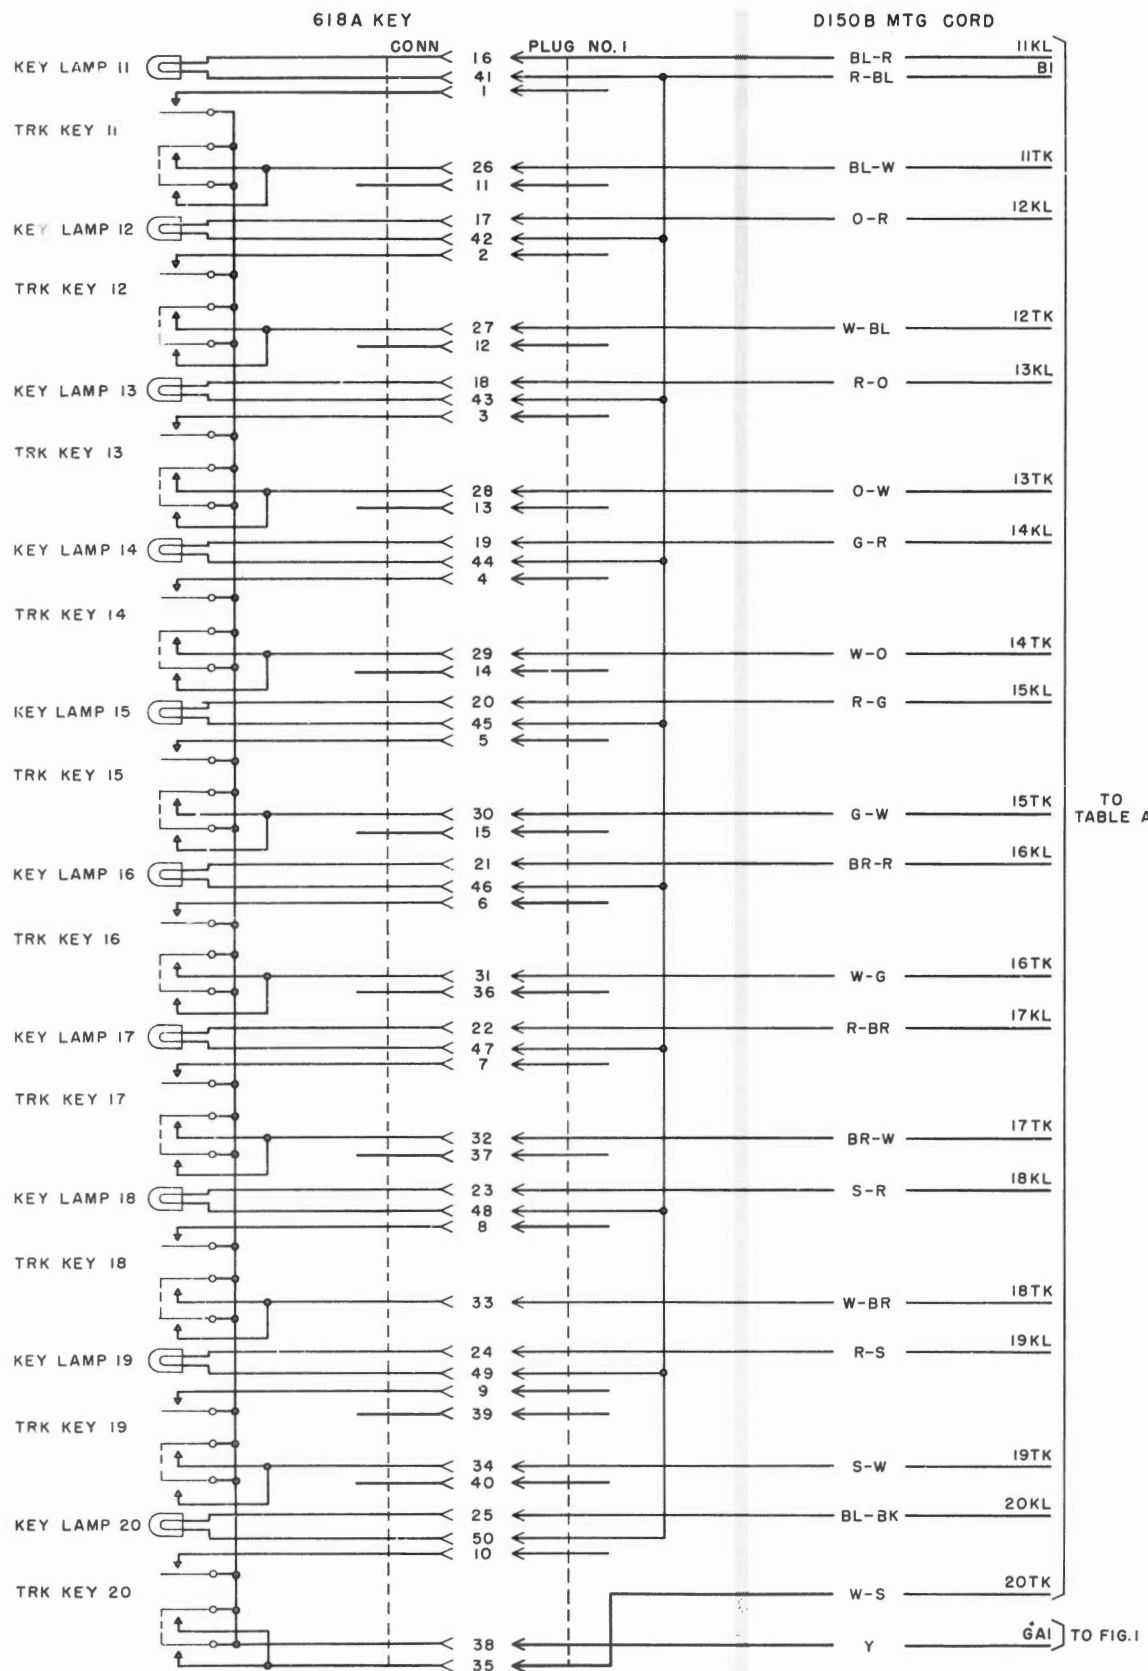


Fig. 8 — Trunk Keys and Key Lamps 11 to 20

TABLE A

CONNECTIONS FOR 621A TELEPHONE SET, BLUE SERVED UNIT OF CONNECTOR CABLE

FROM	D150B MOUNTING CORD BLUE SERVED CORD UNIT					A75A CONNECTOR CABLE CONNECTOR NO.1 BLUE SERVED CABLE UNIT				ASSOCIATED WITH				
FIG. NO.	TERMINATION IN SET		LEAD DESIG	CORD CONDUCTOR		PIN NUMBER OF CORD PLUG AND CONNECTOR CABLE	CABLE CONDUCTOR		CONNECT TO TERMINAL STRIP IN POSITION CIRCUIT					
	CONNECTION FOR	TERMINAL OR PIN NUMBER		SOLID COLOR	BAND COLOR		SOLID COLOR	BAND COLGR	TERMINAL NO.					
8	PLUG 1 TRUNK KEYS AND KEY LAMPS 11 TO 20 (SEE NOTE)	26	11TK	BL	W	1	BL	W	211	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT AS REQUIRED				
		27	12TK	W	BL	26	W	BL	251					
		28	13TK	O	W	2	O	W	242					
		29	14TK	W	O	27	W	O	233					
		30	15TK	G	W	3	G	W	224					
		31	16TK	W	G	28	W	G	215					
		32	17TK	BR	W	4	BR	W	255					
		33	18TK	W	BR	29	W	BR	246					
		34	19TK	S	W	5	S	W	237					
		35	20TK	W	S	30	W	S	228					
		16	11KL	BL	R	6	BL	R	221					
		41	B1	R	BL	31	R	BL	151		FUSE PANEL, BAT. B, +10V SUPPLY			
		17	12KL	O	R	7	O	R	212					
		18	13KL	R	O	32	R	O	252					
		19	14KL	G	R	8	G	R	243					
		20	15KL	R	G	33	R	G	234					
		21	16KL	BR	R	9	BR	R	225					
		22	17KL	R	BR	34	R	BR	216					
		23	18KL	S	R	10	S	R	256					
		24	19KL	R	S	35	R	S	247					
		25	20KL	BL	BK	11	BL	BK	238					
		7	PLUG 2 TRUNK AND STATION LAMPS 11 TO 20 (SEE NOTE)	1	20TL	BK	BL	36	BK		BL	248	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT AS REQUIRED	
				26	20SL	O	BK	12	O		BK	258		
				3	19TL	BK	O	37	BK		O	257		
				28	19SL	G	BK	13	G		BK	218		
5	18TL			BK	G	38	BK	G	217					
30	18SL			BR	BK	14	BR	BK	227					
7	17TL			BK	BR	39	BK	BR	226					
32	17SL			S	BK	15	S	BK	236					
9	16TL			BK	S	40	BK	S	235					
34	16SL			BL	Y	16	BL	Y	245					
11	15TL			Y	BL	41	Y	BL	244					
36	15SL			O	Y	17	O	Y	254					
13	14TL			Y	O	42	Y	O	253					
38	14SL			G	Y	18	G	Y	214					
15	13TL			Y	G	43	Y	G	213					
40	13SL			BR	Y	19	BR	Y	223					
17	12TL			Y	BR	44	Y	BR	222					
42	12SL			S	Y	20	S	Y	232					
20	B2			Y	S	45	Y	S	151	FUSE PANEL, BAT. B, +10V SUPPLY				
19	11TL			BL	V	21	BL	V	231	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT, AS REQUIRED				
44	11SL			V	BL	46	V	BL	241					
45	B3			O	V	22	O	V	161	FUSE PANEL, BAT. B, +10V SUPPLY				
1	TERMINAL STRIP IN SET			1	JK1	V	O	47	V	O	72	POSITION CIRCUIT		
				2	G2	G	V	23	G	V	113	FUSE PANEL, GROUND B		
				3	JK	V	G	48	V	G	62	POSITION CIRCUIT		
		8	R	BR	V	24	BR	V	104					
		9	T	V	BR	49	V	BR	94					
		10	B	S	V	25	S	V	191					
		11	G	V	S	50	V	S	201					

Note: Conductors are spare on 621A1 telephone set.

TABLE B

CONNECTIONS FOR 621A TELEPHONE SET, ORANGE SERVED UNIT OF CONNECTOR CABLE

FROM	D150B MOUNTING CORD ORANGE SERVED CORD UNIT					A75A CONNECTOR CABLE CONNECTOR NO. 2 ORANGE SERVED CABLE UNIT			ASSOCIATED WITH		
FIG. NO.	TERMINATION IN SET		LEAD DESIG	CORD CONDUCTOR		PIN NUMBER OF CORD PLUG AND CONNECTOR CABLE	CABLE CONDUCTOR			CONNECT TO TERMINAL STRIP IN POSITION CIRCUIT	
	CONNECTION FOR	TERMINAL OR PIN NUMBER		SOLID COLOR	BAND COLOR		SOLID COLOR	BAND COLOR		TERMINAL NO.	
6	PLUG 3 TRUNK KEYS AND KEY LAMPS 1 TO 10	26	1TK	BL	W	1	BL	W	115	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT, AS REQUIRED	
		27	2TK	W	BL	26	W	BL	155		
		28	3TK	O	W	2	O	W	195		
		29	4TK	W	O	27	W	O	136		
		30	5TK	G	W	3	G	W	176		
		31	6TK	W	G	28	W	G	117		
		32	7TK	BR	W	4	BR	W	157		
		33	8TK	W	BR	29	W	BR	197		
		34	9TK	S	W	5	S	W	138		
		35	10TK	W	S	30	W	S	178		
		16	1KL	BL	R	6	BL	R	125		
		41	B4	R	BL	31	R	BL	161		FUSE PANEL, BAT. B, +10V SUPPLY
		17	2KL	G	R	7	O	R	165		
		18	3KL	R	O	32	R	O	205		
		19	4KL	G	R	8	G	R	146		
		20	5KL	R	G	33	R	G	186		
		21	6KL	BR	R	9	BR	R	127		
		22	7KL	R	BR	34	R	BR	167		
		23	8KL	S	R	10	S	R	207		
		24	9KL	R	S	35	R	S	148		
		25	10KL	BL	BK	11	BL	BK	188		
		1	10TL	BK	BL	36	BK	BL	198		
		26	10SL	O	BK	12	O	BK	208		
		3	9TL	BK	O	37	BK	O	158		
		28	9SL	G	BK	13	G	BK	168		
5	8TL	BK	G	38	BK	G	118				
30	9SL	BR	BK	14	BR	BK	128				
7	7TL	BK	BR	39	BK	BR	177				
32	7SL	S	BK	15	S	BK	187				
9	6TL	BK	S	40	BK	S	137				
34	6SL	BL	Y	16	BL	Y	147				
11	5TL	Y	BL	41	Y	BL	196				
36	5SL	O	Y	17	O	Y	206				
13	4TL	Y	O	42	Y	O	156				
38	4SL	G	Y	18	G	Y	166				
15	3TL	Y	G	43	Y	G	116				
40	3SL	BR	Y	19	BR	Y	126				
17	2TL	Y	BR	44	Y	BR	175				
42	2SL	S	Y	20	S	Y	185				
20	B5	Y	S	45	Y	S	171	FUSE PANEL, BAT. B, +10V SUPPLY			
19	1TL	BL	V	21	BL	V	135	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT, AS REQUIRED			
44	1SL	V	BL	46	V	BL	145				
45	B6	O	V	22	O	V	171	FUSE PANEL, BAT. B, +10V SUPPLY			
1	TERMINAL STRIP IN SET	12	L	V	O	47	V	O	64	POSITION CIRCUIT	
		14	NA	G	V	23	G	V	202		
		15	NA1	V	G	48	V	G	82		
		16	G1	BR	V	24	BR	V	123	FUSE PANEL, GROUND A	
		17	G3	V	BR	49	V	BR	192	FUSE PANEL, GROUND B	
		17	G4	S	V	25	S	V	192		
		18	G5	V	S	50	V	S	182	FUSE PANEL, GROUND A	

TABLE C

CONNECTIONS FOR 621A TELEPHONE SET, GREEN SERVED UNIT OF CONNECTOR CABLE

FROM	D150B MOUNTING CORD GREEN SERVED CORD UNIT					A75A CONNECTOR CABLE CONNECTOR NO.3 GREEN SERVED CABLE UNIT				ASSOCIATED WITH
FIG. NO.	TERMINATION IN SET		LEAD DESIG	CORD CONDUCTOR		PIN NUMBER OF CORD PLUG AND CONNECTOR CABLE	CABLE CONDUCTOR		CONNECT TO TERMINAL STRIP IN POSITION CIRCUIT	
	CONNECTION FOR	TERMINAL OR PIN NUMBER		SOLID COLOR	BAND COLOR		SOLID COLOR	BAND COLOR	TERMINAL NO.	
4	PLUG 5 COMMON POSITION KEYS	26	PBK	BL	W	1	BL	W	23	POSITION CIRCUIT
		29	CPK	W	BL	26	W	BL	204	ATTENDANT LOOP CIRCUIT
		31	RFK	O	W	2	O	W	152	TRUNK CIRCUIT OR ATTENDANT LOOP CIRCUIT, AS REQUIRED
		33	HK	W	O	27	W	O	172	
		35	ATK	G	W	3	G	W	92	
		16	PBL	W	G	28	W	G	33	POSITION CIRCUIT
		41	B7	BR	W	4	BR	W	181	FUSE PANEL, BAT. B +10V SUPPLY
		25	ATL	W	BR	29	W	BR	102	
3	PLUG 6 PUSHBUTTON DIAL	6	SRK	S	W	5	S	W	13	POSITION CIRCUIT
		16	2	W	S	30	W	S	91	
		35	4	BL	R	6	BL	R	81	REGISTER SENDER LINK CIRCUIT
		4	ST	R	BL	31	R	BL	42	POSITION CIRCUIT
		40	7	O	R	7	O	R	71	REGISTER SENDER LINK CIRCUIT
		2	LG	R	O	32	R	O	122	POSITION CIRCUIT
		1	LB	G	R	8	G	R	131	FUSE PANEL, BAT. C +10V SUPPLY
		3	O	P	G	33	R	G	52	POSITION CIRCUIT
2	PLUG 7 MISC POSITION KEYS	31	I	BR	R	9	BR	R	101	REGISTER SENDER LINK CIRCUIT
		26	LK	R	BR	34	R	BR	93	
		29	NK	S	R	10	S	R	73	POSITION CIRCUIT
		31	SPK	R	S	35	R	S	174	ATTENDANT LOOP CIRCUIT
		8	SPARE	BL	BK	11	HL	BK	SPARE	
		33	FLK	BK	BL	36	BK	BL	63	
		35	SVK	O	BK	12	O	BK	43	POSITION CIRCUIT
		25	SRL	BK	O	37	BK	O	53	
		50	B8	G	BK	13	G	BK	181	FUSE PANEL, BAT. B, +10V SUPPLY
		2	PBK1	BK	G	38	BK	G	23	VERIFICATION DISTRIBUTOR AND POSITION CIRCUIT
		27	VK	BR	BK	14	BR	BK	34	VERIFICATION DISTRIBUTOR
		28	KPR	BK	BR	39	BK	BR	83	POSITION CIRCUIT
		32	RK	S	BK	15	S	BK	194	ATTENDANT LOOP CIRCUIT
		9	LRK	BK	S	40	BK	S	124	TWO-WAY POSITION TRUNK CIRCUIT
		21	SPL	BL	Y	16	BL	Y	184	ATTENDANT LOOP CIRCUIT
		30	SPARE	Y	BL	41	Y	BL	SPARE	
1	TERMINAL STRIP IN SET	34	TRK	O	Y	17	O	Y	144	TRUNK CIRCUIT AND ATTENDANT LOOP CRT
		19	NCL	Y	O	42	Y	O	103	NIGHT CLOSING AND TRAFFIC SUPERVISORY CIRCUIT
	SPARE SPADE TIPPED LEADS ARE TAPED AND STORED IN SET. THESE LEADS MAY BE USED AS REQUIRED	1	SPARE	G	Y	18	G	Y	SPARE	
				BR	Y	19	BR	Y		
				Y	BR	44	Y	BR		
				S	Y	20	S	Y		
				Y	S	45	Y	S		
				BL	V	21	HL	V		
				V	BL	46	V	BL		
				O	V	22	O	V		
				V	O	47	V	O		
				G	V	23	G	V		
				V	G	48	V	G		
				BR	V	24	BR	V		
				V	BR	49	V	BR		
				S	V	25	S	V		
				V	S	50	V	S		
									SPARE	
									182	FUSE PANEL, GROUND A