

TELEPHONE SETS—1502B
CONNECTIONS

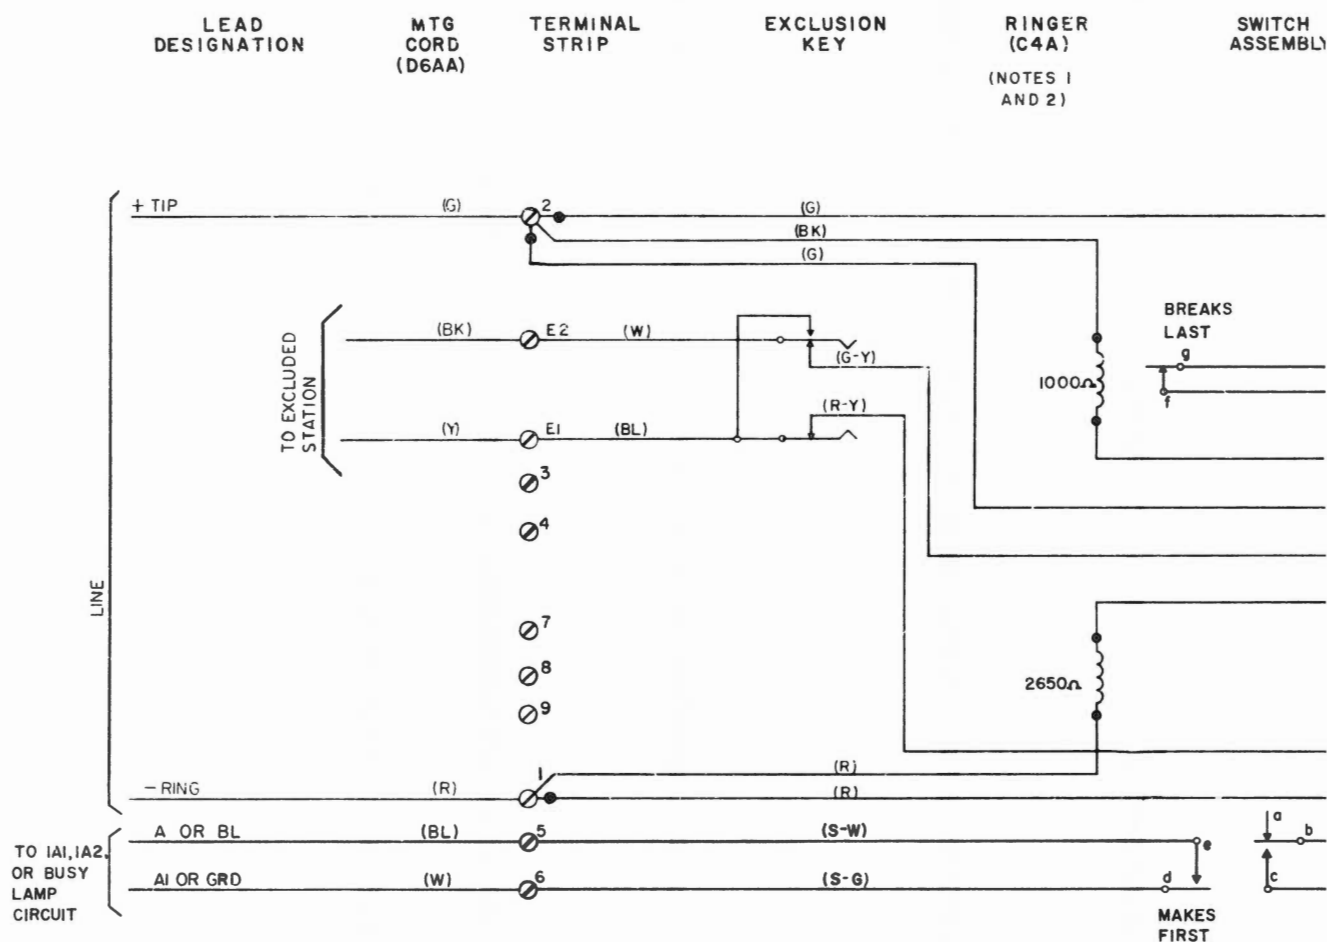
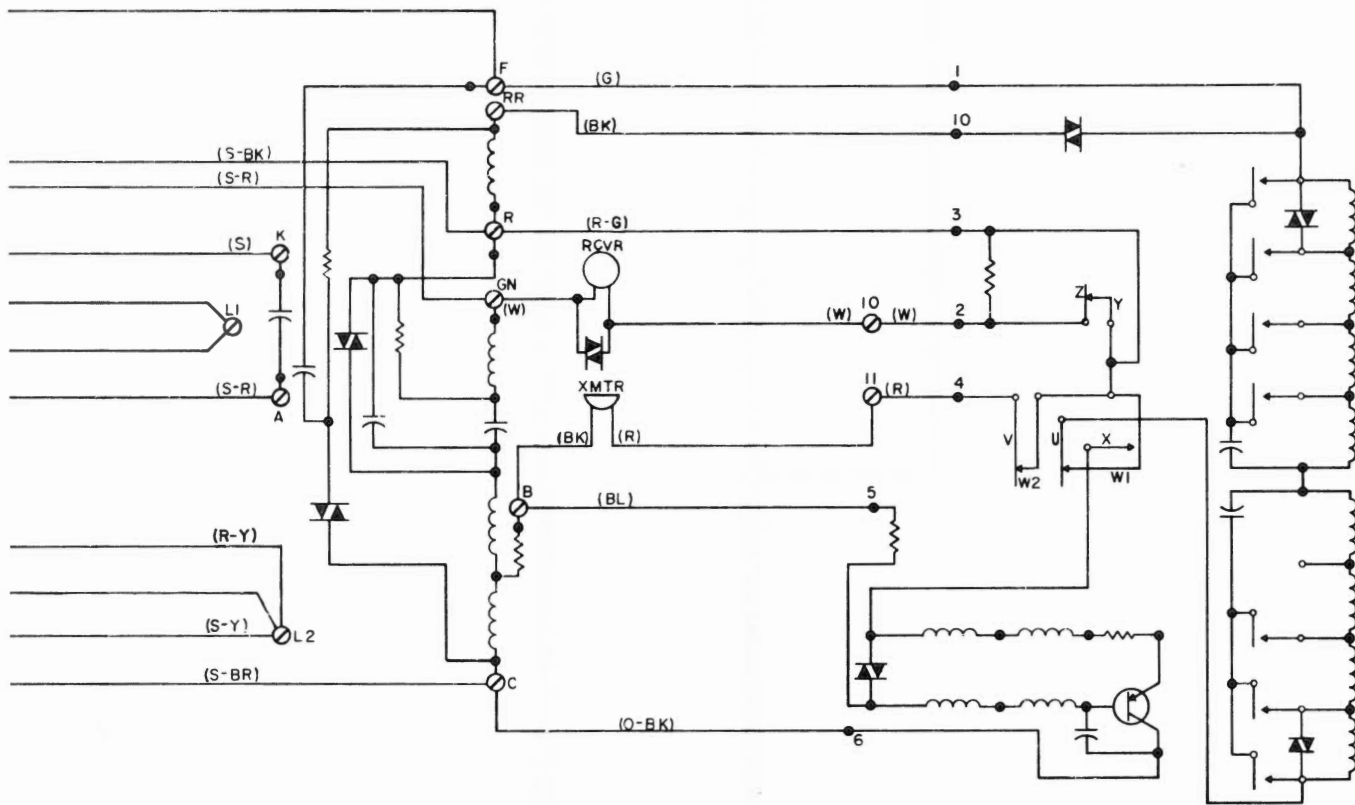


TABLE A
LINE AND RINGER CONNECTIONS

FEATURES					CONNECTIONS TO TERMINALS INSIDE SET														EXTERNAL MOUNTING			
NUMBER OF LINES PICKED UP	RINGER IN SET USED AS		EXCLUSION KEY USED TO CUT OFF		MOUNTING CORD LEADS						EXCLUSION KEY LEADS				RINGER LEADS				LINE		EXCLUSION CIRCUIT	
	LINE RINGER	COMMON OR PRIVATE LINE RINGER	EXT. STA. OR EXT. RING	RINGER IN SET																		
					R	G	Y	BK	BL	W	R-Y	G-Y	BL	W	R	BK	S	S-R	RING	TIP	RING	TIP
1	●		●		1	2	E1	E2	5	6	L2	L1	E1	E2	1	2	K	A	R	G	Y	BK
1		●		●	1	2	E1	E2	5	6	4	3	E2	3	E1	4	A	A	R	G		

Fig. 1 — 1502B Telephone Set, Connections

NETWORK
(425E)HANDSET
G3ARTERMINAL
STRIPDIAL
(25A3)

CONNECTIONS TO VG CORD

COMMON OR PRIVATE RINGER CIRCUIT		1A1, 1A2, OR STATION BUSY LAMP CIRCUIT	
R	B	A OR BL	A1 OR GRD
		BL	W
Y	BK	BL	W

NOTE 1: TO SILENCE RINGER PERMANENTLY,
CONNECT BK RINGER LEAD TO K ON NETWORK.

NOTE 2: A 7-TYPE BUZZER ON A 44B BRACKET
MAY BE SUBSTITUTED FOR THE C4A RINGER AS
A COMMON OR PRIVATE LINE SIGNAL.