

FIG. 1.
FOR BATT & ETH RUN SEE FIG. 2.


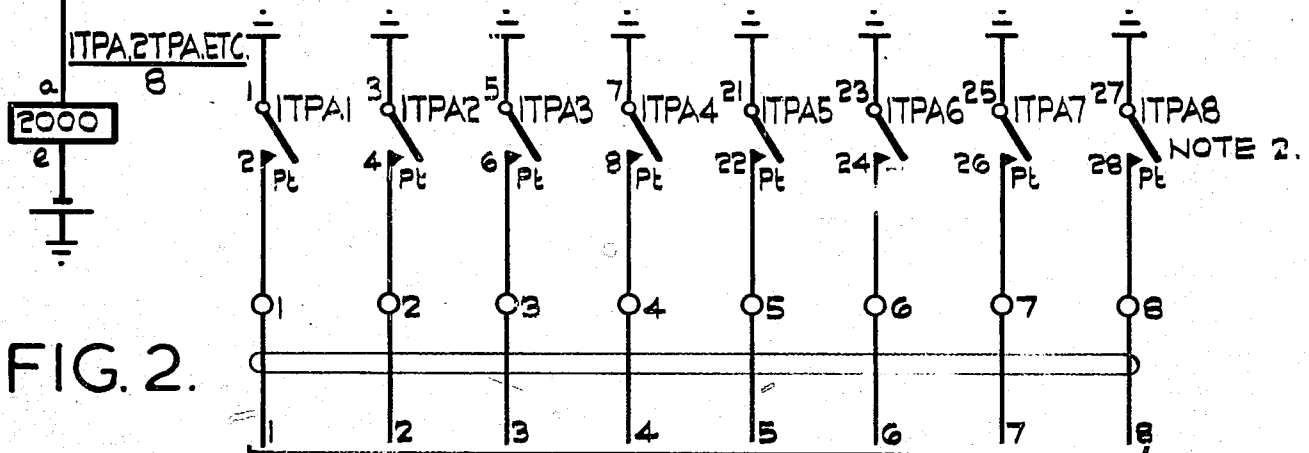


FIG. 2.

TO ROUTE DISCRIMINATING OR RESTRICTING CIRCUITS, GBW 13920, GBW 13940 OR EQUIVS. (ONE 'TPA' CONTACT PER CIRCUIT)

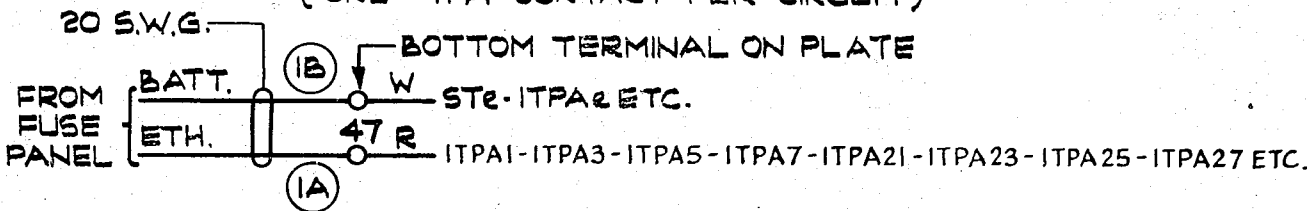

NOTES

1. FUSE :- 1.5A PER CIRCUIT.
2. CONTACTS OF OTHER RELAYS WIRED SIMILAR TO THOSE SHOWN BUT TO THE FOLLOWING TERMINALS.
2 TPA TO SC11-SC18
3 TPA TO SC21-SC28
4 TPA TO SC31-SC38
3. Ø FOR WIRING SEE GBW 13730 OR EQUIV.
4. ALL WIRING TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED.
5. UNLESS OTHERWISE SPECIFIED ALL TERMINALS ARE ON STRIP CONN AT REAR AND ARE DESIGNATED 'SC' IN WIRING RUNS.



PIP-PIP-PIP TONE START DELETED FROM FIG.1(74881)		2	29-8-63	DB.H.	U.A.X. NO. NZ 13 6 SECOND TIME PULSE DISTRIBUTION RELAYS			
AMENDMENT PARTICULARS		ISSUE	DATE	APP?		REF:-		
NZPO		DRAWN R.L.		CHECKED	WIRING	CIRCUIT	SIZE F	50Y.H
							GBW 14020	

