


**HAND TELEPHONE SETS — 211J, L**  
**HANGUP TYPE — COMMON BATTERY — CONNECTIONS**  
**WITH NETWORK TYPE SUBSCRIBER SETS**

**TABLE A**  
**COMBINATION OF APPARATUS**

Hand Tel. Set Code	Components				
	Handset	Handset Mounting	Dial or Apparatus Blank	Dial Mounting	Handset Cord
211J-3 (As furnished)	G1A-3	G6-3	Number Card Holder	—	H-4
211J-3 (Modified)	F4A-3				H-3
211J-3 (Modified)	F1A-3 F1G-3				H-3
211L-3 (As furnished)	G1A-3		6A	43A-3	H-4
211L-3 (Modified)	F4A-3		5H or 6A		H-3
211L-3 (Modified)	F1A-3 F1G-3		5H or 6A		H-3

## 3.00 CIRCUIT DIAGRAM

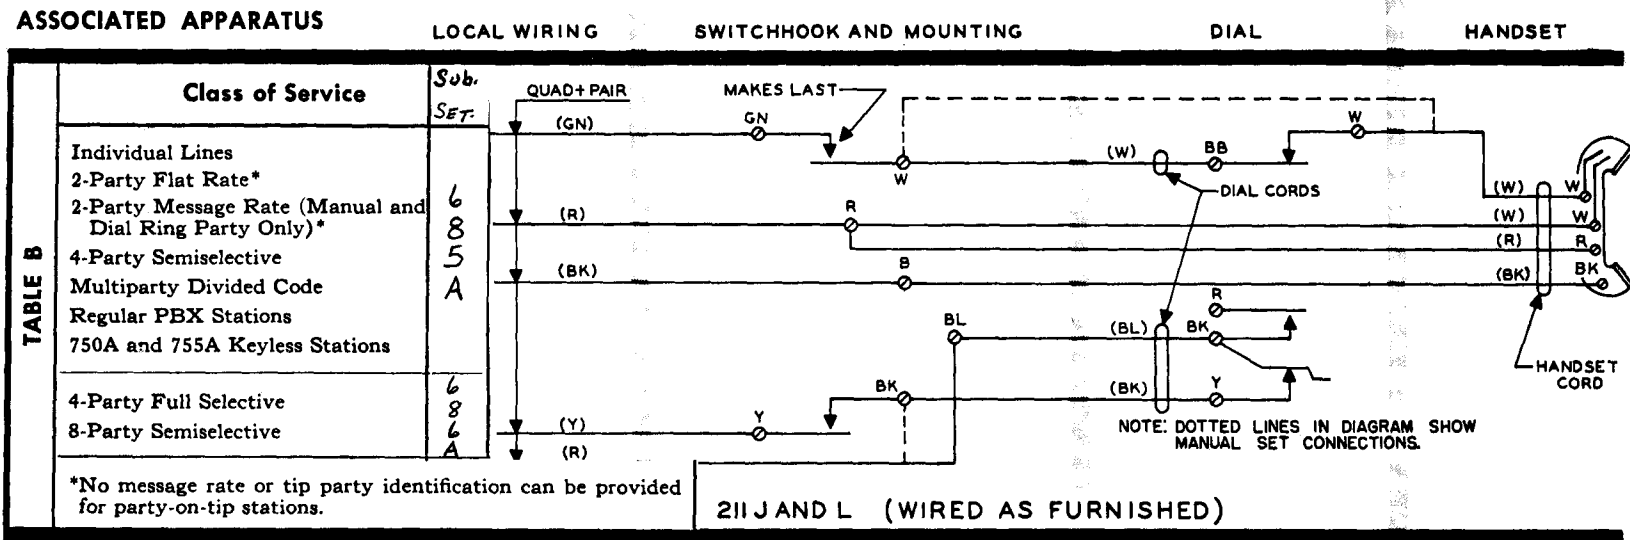

3.01 The 211-type set is arranged for, but not equipped with, a 61M filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the switchhook and connect filter as shown in Fig. 7.