


HAND TELEPHONE SETS—212L CONNECTIONS

TABLE A
COMBINATION OF APPARATUS

Hand Tel Set Code	Components				
	Handset	Handset Mounting	Dial or Apparatus Blank	Dial Mounting	Handset Cord
212L-3 (Modified)	G3A-3	G7-3	Number Card Holder	—	H-4
212L-3 (Modified)	F4A-3				H-3
212L-3 (Modified)	F1A-3 F1G-3				H-3
212L-3 (As furnished)	G3A-3		6A	43A-3	H-4
212L-3 (Modified)	F4A-3				H-3
212L-3 (Modified)	F1A-3 F1G-3				H-3

TABLE B	Class of Service	
	Individual Lines	
	2-Party Flat Rate*	
	2-Party Message Rate (Manual and Dial Ring Party Only)*	**
	4-Party Semiselective	
	Multiparty Divided Code	
	Regular PBX Stations	
	750A and 755A Keyless Stations	
	1A1 and 1A2 Key Telephone Systems	SUB SET 685A
	4-Party Full Selective	
	8-Party Semiselective	SUB SET 686A †
	* No message rate or tip party identification can be provided for party-on-tip stations.	

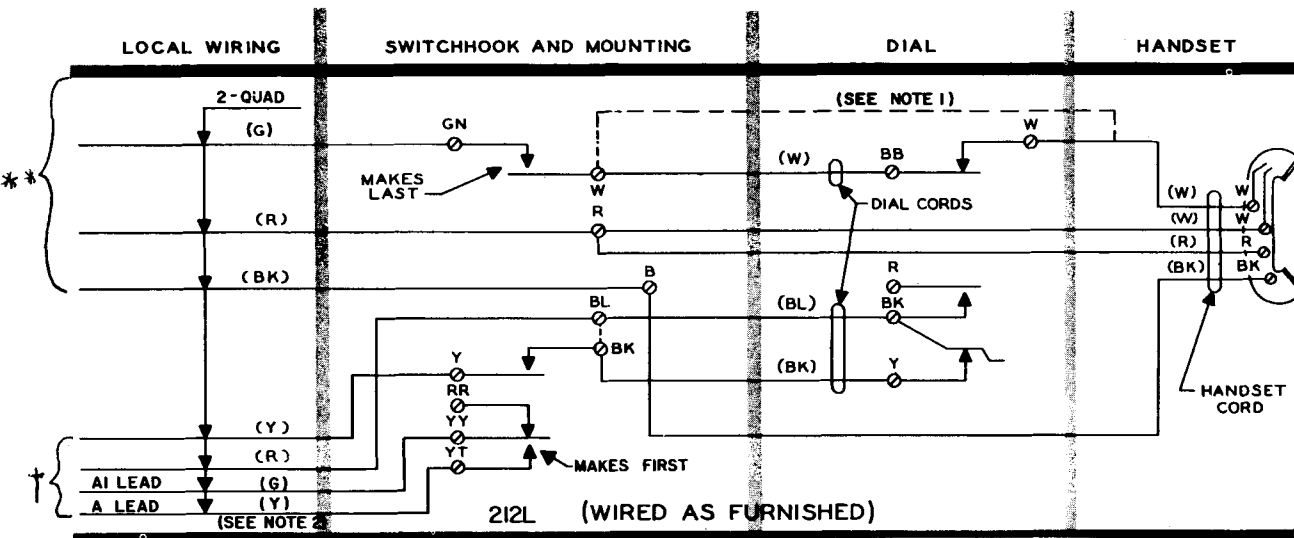

Note 1: Dotted lines in diagram show manual set connections.

Note 2: Extend A and AI leads to the key telephone unit.

Fig. 1 — 212L Hand Telephone Set, Circuit Diagram

TABLE C	Class of Service
	2-Party Flat Rate 2-Party Message Rate
	Where message rate or tip party identification is required for party-on-tip stations, both 1000- and 2640-ohm tip-to-ground resistance can be provided, ie, *
	<div> <div> MR — All offices ZR — All offices AMA — Std X-bar </div> <div> AMA — Mod X-bar AMA — SxS AT — SxS </div> </div> <i>SUB SET 685A</i>
	May also be used for these classes of service: **
	<ul style="list-style-type: none"> • Individual Lines • 4-Party Semiselective • Multiparty Divided Code • Regular PBX Stations • 750A and 755A Keyless Stations

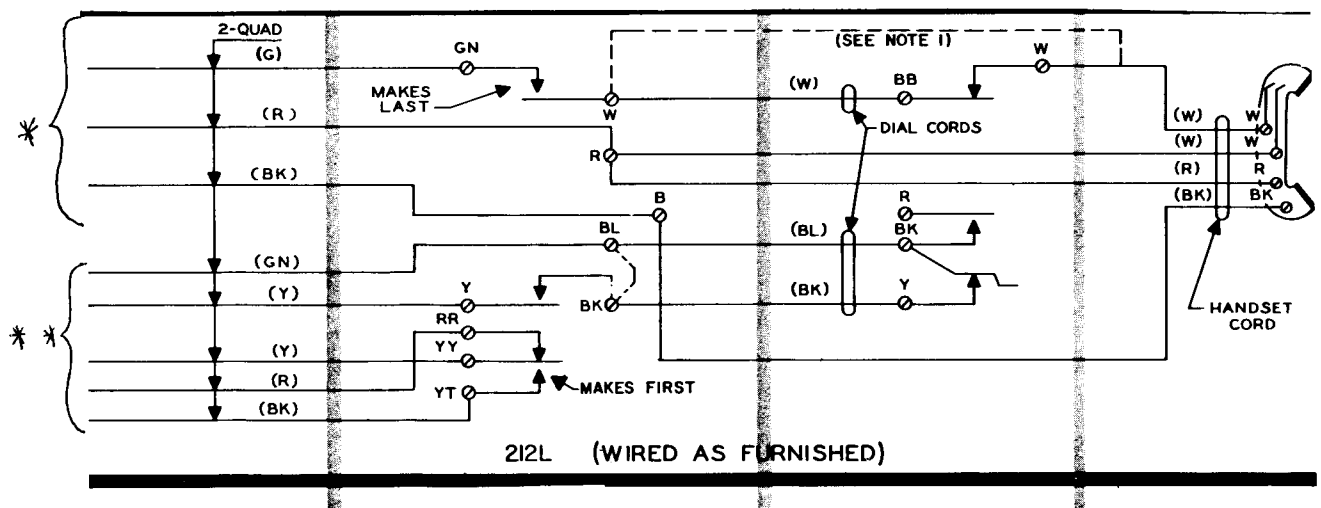


Fig. - 212L Hand Tel. Set, Circuit Diagram
(Continued See notes Page 2)