


- NOTES:-
1. FUSE:- -VE 50X BATT. 1.5A PER CIRCUIT.
+VE 50X BATT. 0.5A PER CIRCUIT.
 2. SHELF JACK 'U' POINTS 14 AND 16 MAKE CONTACT WHEN RELAY SET IS REMOVED.
 3. ALL WIRING TO BE 25 S.W.G. UNLESS OTHERWISE SPECIFIED
 4. Ø FOR WIRING SEE ASSOCIATED COMMON SERVICES DIAGRAM. GBW15890 OR EQUIV.
 5. RELAY 'DR' IS DIFFERENTIALLY CONNECTED.

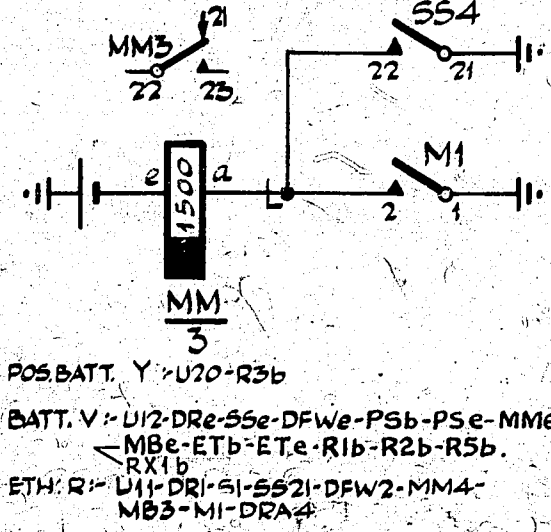

				OUTGOING JUNCTION CIRCUIT TO INTERNATIONAL EXCHANGE			
RX1 ADDED TO MB RELAY (122353)				3A	2-10-74	B-5-H	
CAPACITATORS C1 & C2 ADDED (13652)				3	14-8-70	RW	
URI VALUES MODIFIED.				2			
				1			
AMENDMENT PARTICULARS				ISSUE	DATE	APP.	REF. 5245420
							SIZE: S
							GBW 15750
WZEO		DRAWN L.H.	CHECKED	WIRING	CIRCUIT		