



NOTES:
 1- ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
 2- COLOURS IN BRACKETS MAYBE STRAPPED.
 3- ON SOME EARLY EQUIPMENT BATTERY WIRING COLOUR IS BK & W.

R14b-R13b-R12b-R11b-R10b-R9b-R8b-R7b-R6b
 50V. BATT.-V. 0.7mm JKB24
 K8-BB8-TB8-PG8-PE8-PC8-OE8-OF8-OD8-OB8-OA8-CA8-RE8-RDE-RC8-RB8-RA8-R2b-R3b.

ETH R. 0.7mm JKB21 - KE2 - KE22 - KRS21 - KR25 - KOL7 - KEL3 - KI - TRa - WPI - BB1 - BAI - Ma - MI - LD1 - TB4 - PRI - PG26 - PG3 - PC21 - OF3 - CS5.

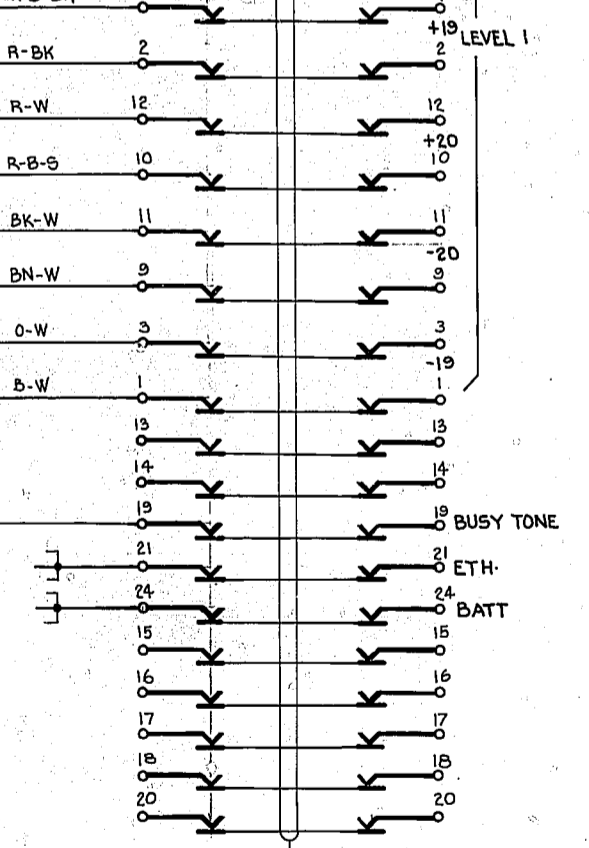

ACCESS CORD PROOF

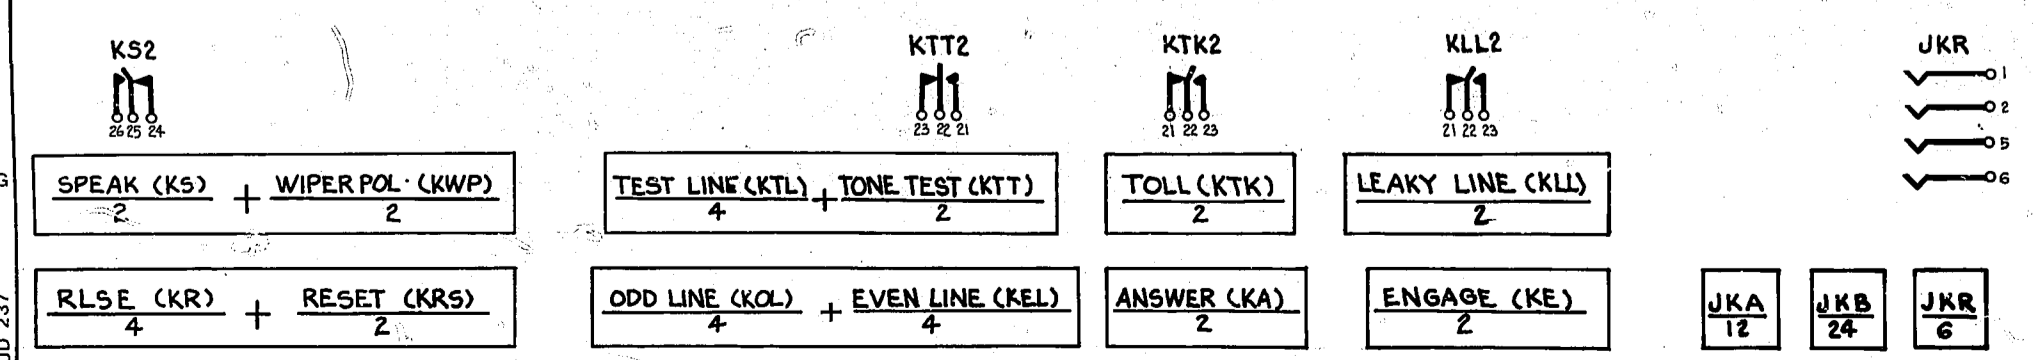

11-20 PBX
 FINAL SELR
 TEST SET

ISS DATE	DEL DC	ORDER	CHK APP	ORDER
DRN T-EQPT	CKD	ORIGIN-T-EQPT		
TCD: M-K	APPD	STANDARD: ATW22001		
NZPO ENGINEER-IN-CHIEF, WELLINGTON				
SHT 1 OF 1				
SIZE A1 GBW 15930				

