

TELEPHONE SETS - 702B.

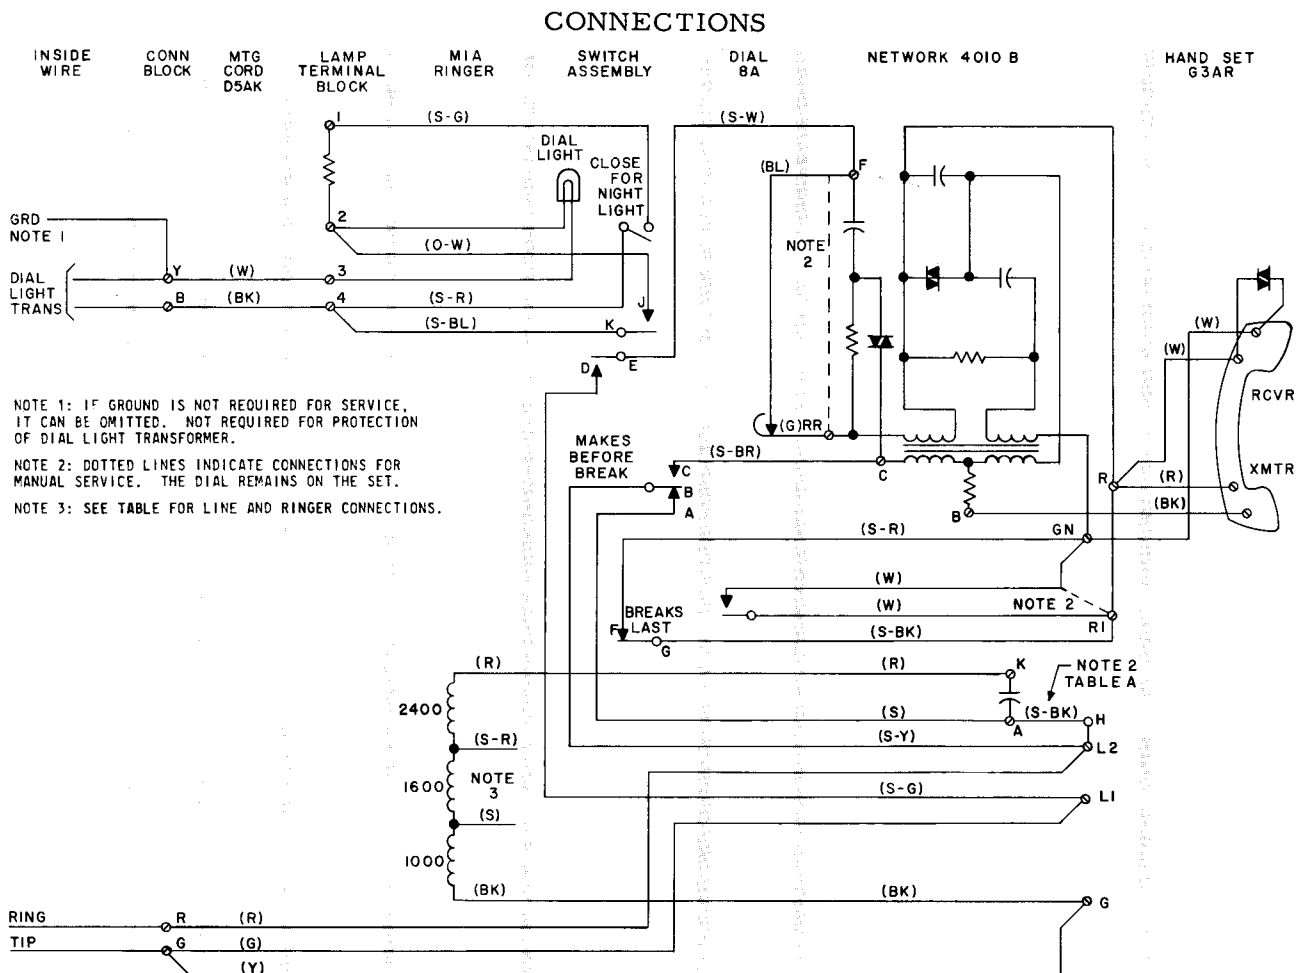


Fig. 1 - 702B Telephone Set

TABLE A - CONNECTIONS

Class of Service	Connections at 42A Connecting Block										Connections at Telephone Set									
	Line			Transformer		Mounting Cord					Mounting Cord					Ringer				
	Ring	Tip	Grd	1	2	R	G	Y	W	BK	R	G	Y	W	BK	R	BK	S	S-R	
Bridged (Note 1)	R	G		Y	B	R	G	G										*		
Ring party (Note 1)																				
Tip-party except message rate											Y	B	L2	L1	G	3	4	K	G	
Tip-party dial message rate, 1000Ω (Note 2)	R	G	Y							Y										B
Automatic ticketing, 2600Ω (Note 2)						G	R											*	B	

Note 1: Connections for bridged and ring party are the same for flat and message rate.

Note 2: For tip party dial message rate or automatic ticketing service, S-BK lead shall be disconnected from terminal A of network, taped and stored.

* Furnished taped and stored. For tip party message rate or ANI service, connect as shown.

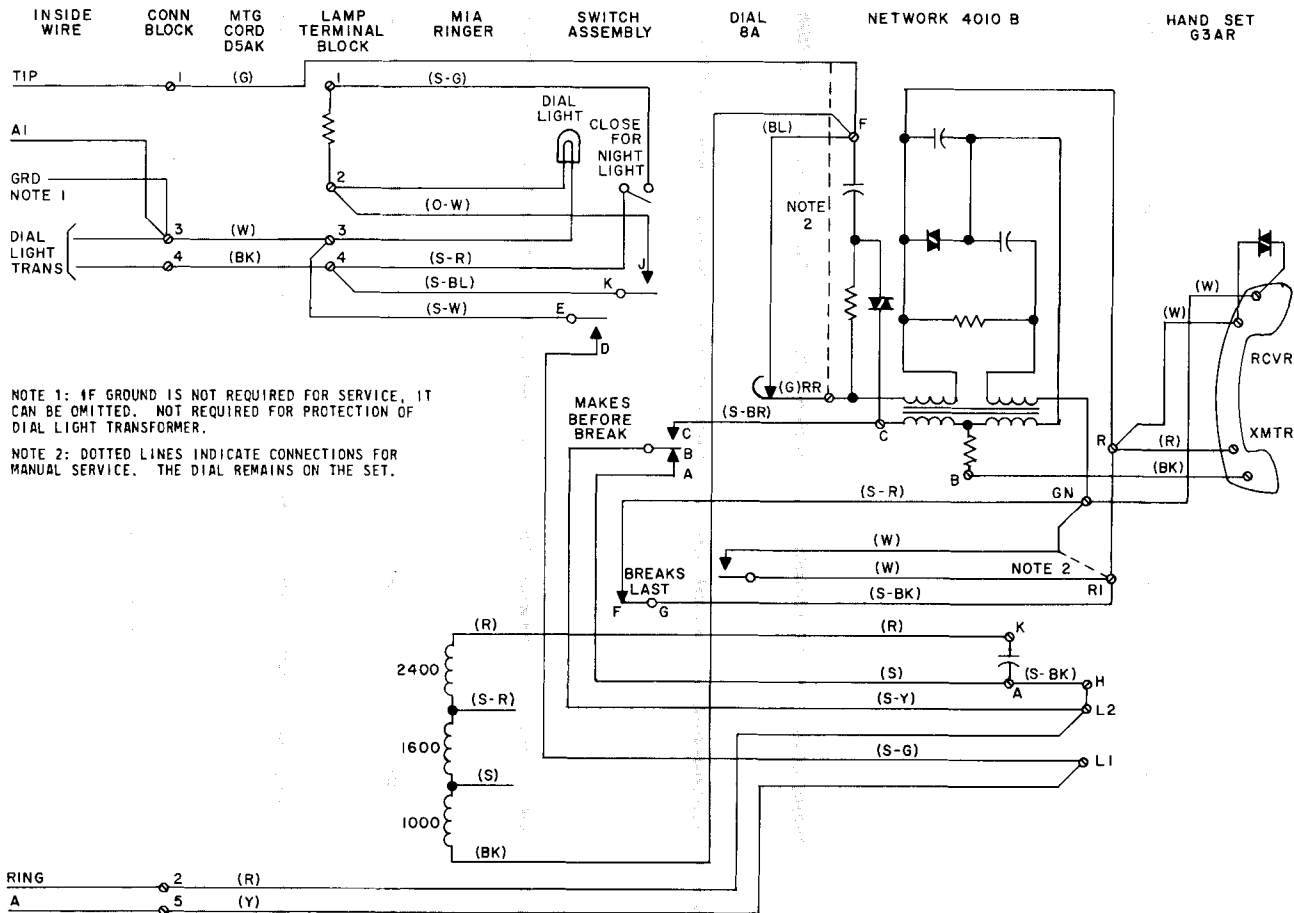


Fig. 2 - 702B Telephone Set
Used with 1A1 Key Telephone System

TABLE B
MODIFICATIONS FOR 1A1

	Lead or Conductor	From	To
Mounting Cord	G	L1	F
	Y	G	L1
Ringer	BK	G	F
Switchhook	S-W	F	3



To prevent false holding condition when handset is restored, switch contacts CB must break before DE breaks.

Note: If ground is not required for service, it can be omitted. Not required for protection of dial light transformer.


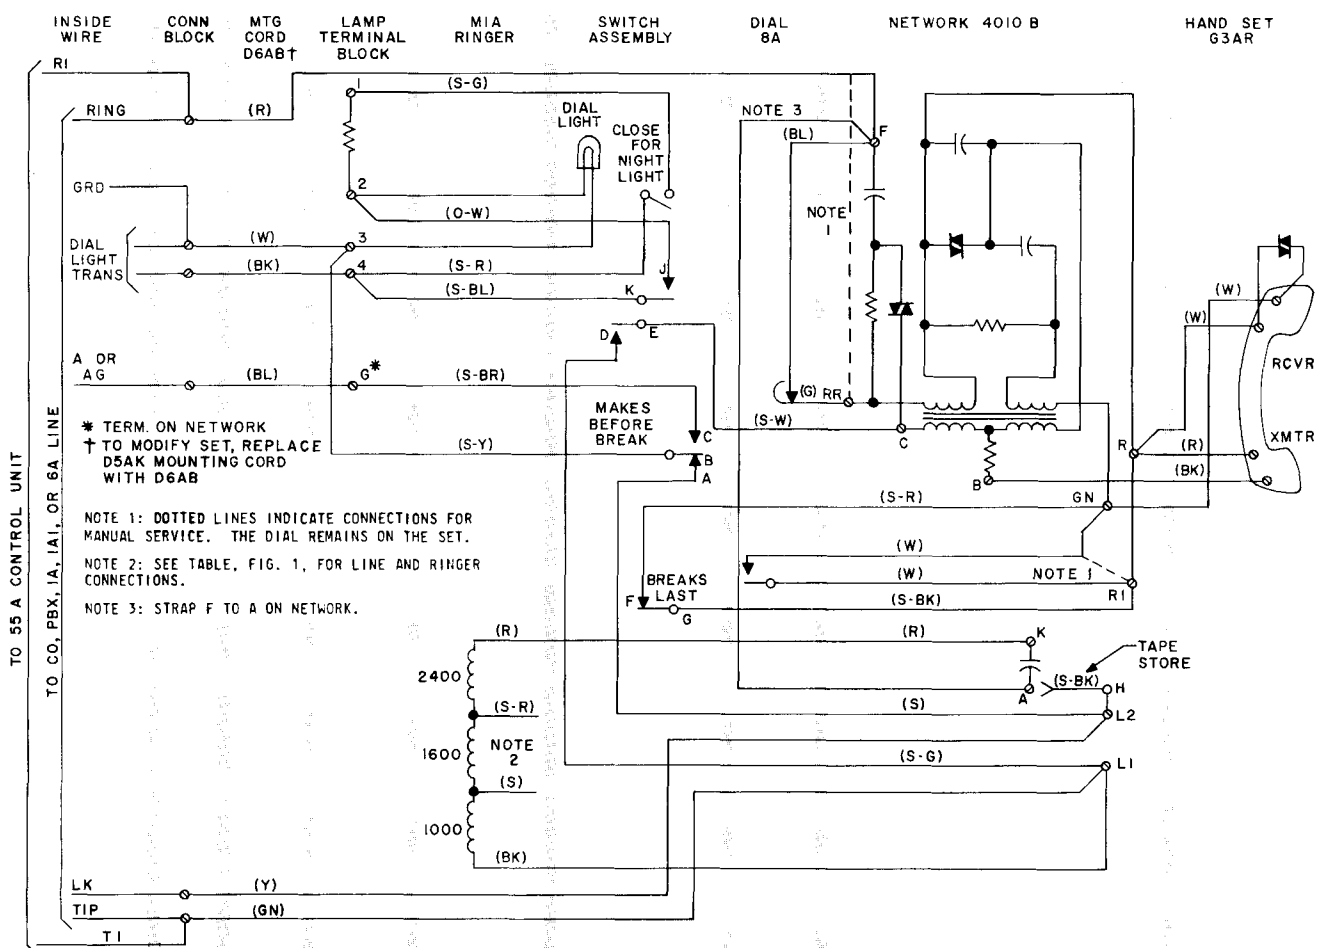


Fig. 3 - 702B Telephone Set
Used with 3A Speakerphone

TABLE C
MODIFICATIONS FOR USE WITH
3A SPEAKERPHONE

D6AB Mounting Cord	R	L2	F
	BL		G
	Y	G	L2
Switchhook Assembly	S-Y	L2	3
	S	A	L2
	S-BR	C	G
H Terminal Network	S-BK	A	Tape and Store
Strap		A	F



To prevent false holding condition when handset is restored, switch contacts CB must break before DE breaks.

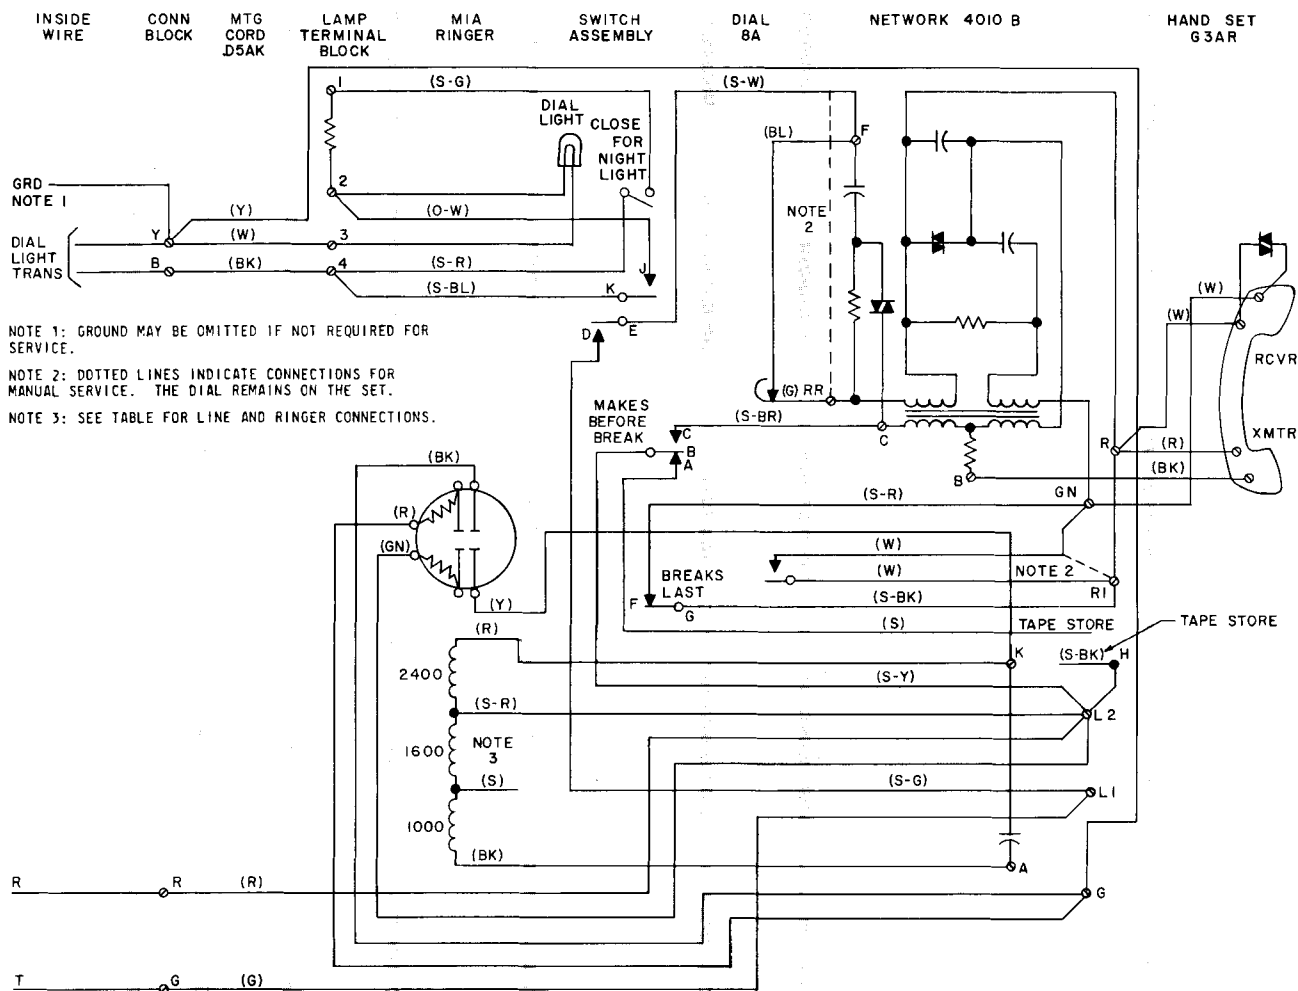


Fig. 4 - 702B Telephone Set,
Selective Ringing

TABLE D
CONNECTIONS FOR 4-PARTY FULL-SELECTIVE RINGER

Party	425A or 426A Tube				Ringer Leads				Mounting Cord											Line		
									Conn. Block					Telephone Set								
	R	Y	BK	GN	R	BK	S	S-R	R	GN	Y	W	BK	R	GN	Y	W	BK	T	R	G	
+ Ring	L1		G	L2	K	A	*	L2	R	G	Y	Y	B	L2	L1	G	3	4	T	R	Y	
+ Tip									G	R												
- Ring	L2		L2	L1	K	A	*	G	R	G	Y	Y	B	L2	L1	G	3	4	T	R	Y	
- Tip									G	R												

Note 1: (S-BK) lead from H tape and store.

Note 2: (S) lead from switchhook tape and store

* Furnished taped and stored.