


- NOTES:
- FUSE: 1.0A PER CIRCUIT AND ASSOCIATED ROUTE DISCRIMINATING EQUIPMENT.
 - ALL WIRING NOT OTHERWISE SPECIFIED TO BE 0.5 mm
 - Ø FOR WIRING SEE GBW13730 OR EQUIV
 - UNLESS OTHERWISE SPECIFIED ALL TERMS ARE ON STRIP CONN AT REAR AND ARE DESIGNATED 'SC' IN WIRING RUNS
 - WHEN ROUTE DISCRIMINATION EQUIPT IS NOT PROVIDED ie - AT NON METERING EXCH'S OR ON MANUAL EXCH ROUTES STRAP SC32 TO SC42 AND SC40 TO SC50
 - THE FOLLOWING RESISTORS ARE NOT USED: R2, R3, R8
 - TAG 'M' IS CONNECTED TO THE JUNCTION LEVEL GIVING DIRECT ACCESS TO THE PARENT MANUAL EXCHANGE TAG 'MI' IS CONNECTED TO THE SUB-R. DIALLED JUNCTION LEVEL
 - WHEN JUNCTION RESISTANCE EXCEEDS 200 OHMS STRAP TERMINALS SC34 & SC44
 - WHEN GBW 15510 IS PROVIDED USE CABLING SHOWN THUS $\text{---} \times \text{---}$ AND DELETE CABLING SHOWN THUS $\text{---} \times \text{---}$
 - ON EARLY EQUIPMENT BATT WIRING WAS W

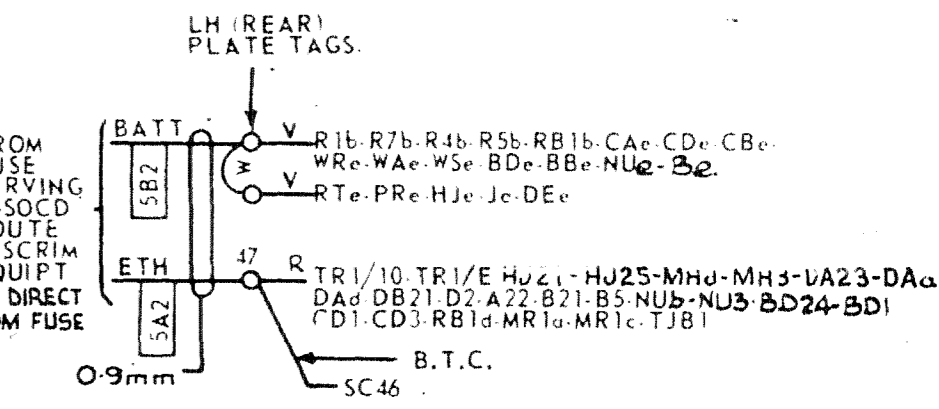

NOT TO BE USED FOR NEW WORK	
HJ4 COMBINATION WAS SHOWN SPARE	4 16-3-73 B5H
NZ NOTE DELETED (99593)	
N.Z. NOTE A ADDED (30265)	3A 6-3-72 B5-H
*SK1 COMBINATION WAS SHOWN WIRED TO SCB32 & CA2L	3 2-5-69
*DB4 COMBINATION WAS NOT SHOWN SPARE (7986)	
NOTES 5A7 REVISED. NOTE 10 ADDED (7720)	2 25-11-69
AMENDMENT PARTICULARS	
ISSUE DATE	APP
REF.: GBW13930	
SIZE L 50v H	
DRAWN DB/AV	
CHKD	
WIRING CIRCUIT	
GBW 16000	

TO ROUTE DISCRIMINATING EQUIPMENT & TIMING CIRCUIT (GBW 13920 OR EQUIV)