


- NOTES:-**
1. FUSING 1.5A PER CCT.
  2. SHELF JACK 'U' POINTS 1 & 3, 2 & 4, 9 & 11 TO MAKE CONTACT WHEN RELAY SET IS REMOVED.
  3. THE NORMAL SENDING LEVEL IS 9 dBm IN SPECIAL CIRCUMSTANCES A LEVEL OF -6 dBm WILL BE USED.
  4. ⌀ FOR WIRING SEE RACK COMMON SERVICE DIAGRAM GBW 12110 OR EQUIV. OR GBW 13730 OR EQUIV.
  5. ALL WIRING TO BE 0.5mm UNLESS OTHERWISE SPECIFIED.
  6. 'U' POINTS 14 AND 16 ARE STRAPPED EXTERNALLY.
  7. VT2 IS FITTED WITH A HEAT SINK.
  8. WHEN USED WITH GBW 12110 USE ALTERNATIVE — 3 — 3 —  
WHEN USED WITH GBW 13730 USE ALTERNATIVE — 4 — 4 —
  9. EARTH CONNECTION ON U15 FOR OSCILLATOR 'B' NOT REQUIRED WHEN USED WITH GBW 13730.
  10. PRIOR TO ISSUE 4 BATTERY WIRING COLOURS WERE BK OR W CS3 IN T.A.O. 1 WAS CS3A - 1.4F & CSB - 1.4F AND C1 IN T.O.M. 1 WAS 0.25.4F.

BATT FUSE 0.7mm V — 1B2 — U12  
 ETH BAR 0.7mm R — 1A2 — U15 (NOTE 9)  
 SCREENED WIRED  
 BATT. V U12-R1b-R2b-K2-R5b  
 ETH. R U11-M2-CO2-CO3-T.A.C.1/4-T.O.M.1/4-R4a-S1a-LP1a

**2280% OSCILLATOR**  
 N.Z.S.S. A.C. N.C. N<sup>o</sup>s 2T AND 3T

ISS	DATE	DEL	DC	ORDER	CHK	APPD	CHANGE
DRN:	T - EQPT	CKD		ORIGIN:	T - EQPT		
TCD:	N. S.	APPD		STANDARD:	ATW 22001		
N.Z.P.O. ENGINEER-IN-CHIEF, WELLINGTON							
<b>GBW 16480</b>							

**PROOF**

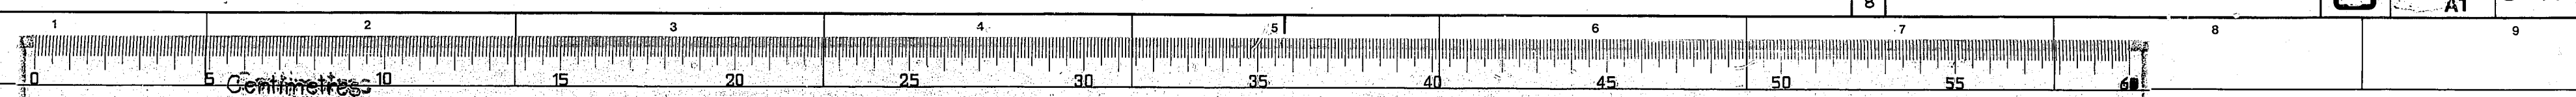

UD 237