



**FIG. 1B**  
DISCRIMINATES 1ST DIGIT  
ON 1ST AND 2ND  
(5 CIRCUITS PER BASE)  
NOTE 9

**FIG. 1C**  
DISCRIMINATES 1ST & 2ND DIGITS  
ON 1ST, 2ND & 3RD  
(3 CIRCUITS PER BASE)  
NOTE 9

**FIG. 1D**  
DISCRIMINATES 1ST & 2ND DIGITS  
ON 1ST, 2ND & 3RD  
(3 CIRCUITS PER BASE)  
NOTE 9

**FIG. 1E**  
DISCRIMINATES 1ST & 2ND DIGITS  
ON 1ST, 2ND & 3RD  
(3 CIRCUITS PER BASE)  
NOTE 9

- NOTES:-**
1. FUSE - 10 AMPER SELFR ASSOCIATED JUNCTION
  2. ALL WIRING NOT OTHERWISE SPECIFIED TO BE 25 S.W.G.
  3. ROTARY MAGNET WOUND TO A RESISTANCE OF 25 OHMS.
  4. RELAYS TO BE WOUND WITH ENAMELLED COPPER WIRE.
  5. JACK POINTS U9 & U11 (FIG. 1A) TO MAKE CONTACT (FIG. 1C) AND U9 & U11 (FIG. 1D) TO MAKE CONTACT (FIG. 1E) AND U9 & U11 (FIG. 1E) TO MAKE CONTACT (FIG. 1A) WHEN RELAY SET IS USED (FIG. 1B) TO MAKE CONTACT (FIG. 1C) WHEN RELAY SET IS REMOVED.
  6. NP SPRINGS TO OPERATE ON TRAFFIC JUNCTION LEVELS WITH OVERLOAD DIRECT VIA JUNCTION HUNTER ROUTE.
  7. Ø FOR WIRING SEE GBW/0650 OR EQUIV.
  8. ON EQUIPMENT TO GBW/2019 AND GBW/2019 Ø OF BUSY TONE WAS WIRED DIRECT.

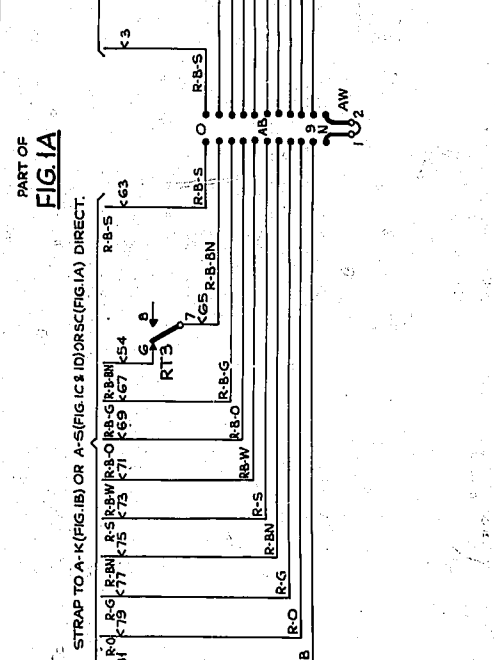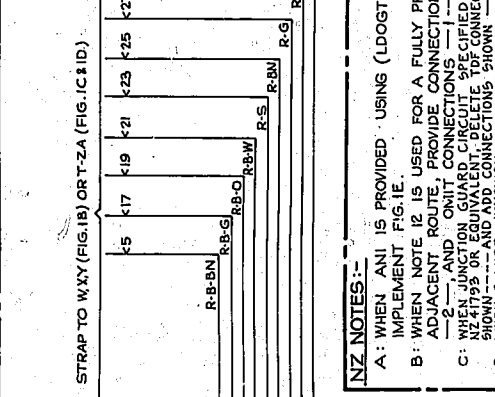

AMENDMENT PARTICULARS

NO.	DATE	BY	REASON
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			