

AMERICAN TELECOMMUNICATION CORPORATION  
KIT FOR CUSTOM TELEPHONE  
INSTALLATION AND MAINTENANCE

1. GENERAL

1.01 This addendum is issued to provide the procedures for modifying Decorator Telephone Conversion Kit A-4200 for use with key telephone systems.

1.02 In ink or red pencil make the changes called for in Part 2. Write "See Addendum" in the margin adjacent to the affected material. File this addendum in the binder ahead of Issue 1 of the section.

2. CHANGES

2.01 Add Part 5 and Figure 5 as follows:

5. KEY TELEPHONE SYSTEM MODIFICATION

5.01 To modify the conversion kit for use in key telephone systems, proceed as follows (Figure 5):

- (1) Remove the three-conductor line cord and replace with a four- or six-conductor line cord.
- (2) Connect the line cord to the terminals in the base as follows:
  - (a) RED (Ring) to terminal 10.
  - (b) GRN (Tip) to terminal 2.
  - (c) BLK (A) to terminal 8.
  - (d) YEL (A1) to terminal 9.
- (3) Move the ringer capacitor lead from terminal 9 to terminal 2.
- (4) Move the RED hookswitch lead from terminal 2 to terminal 9.

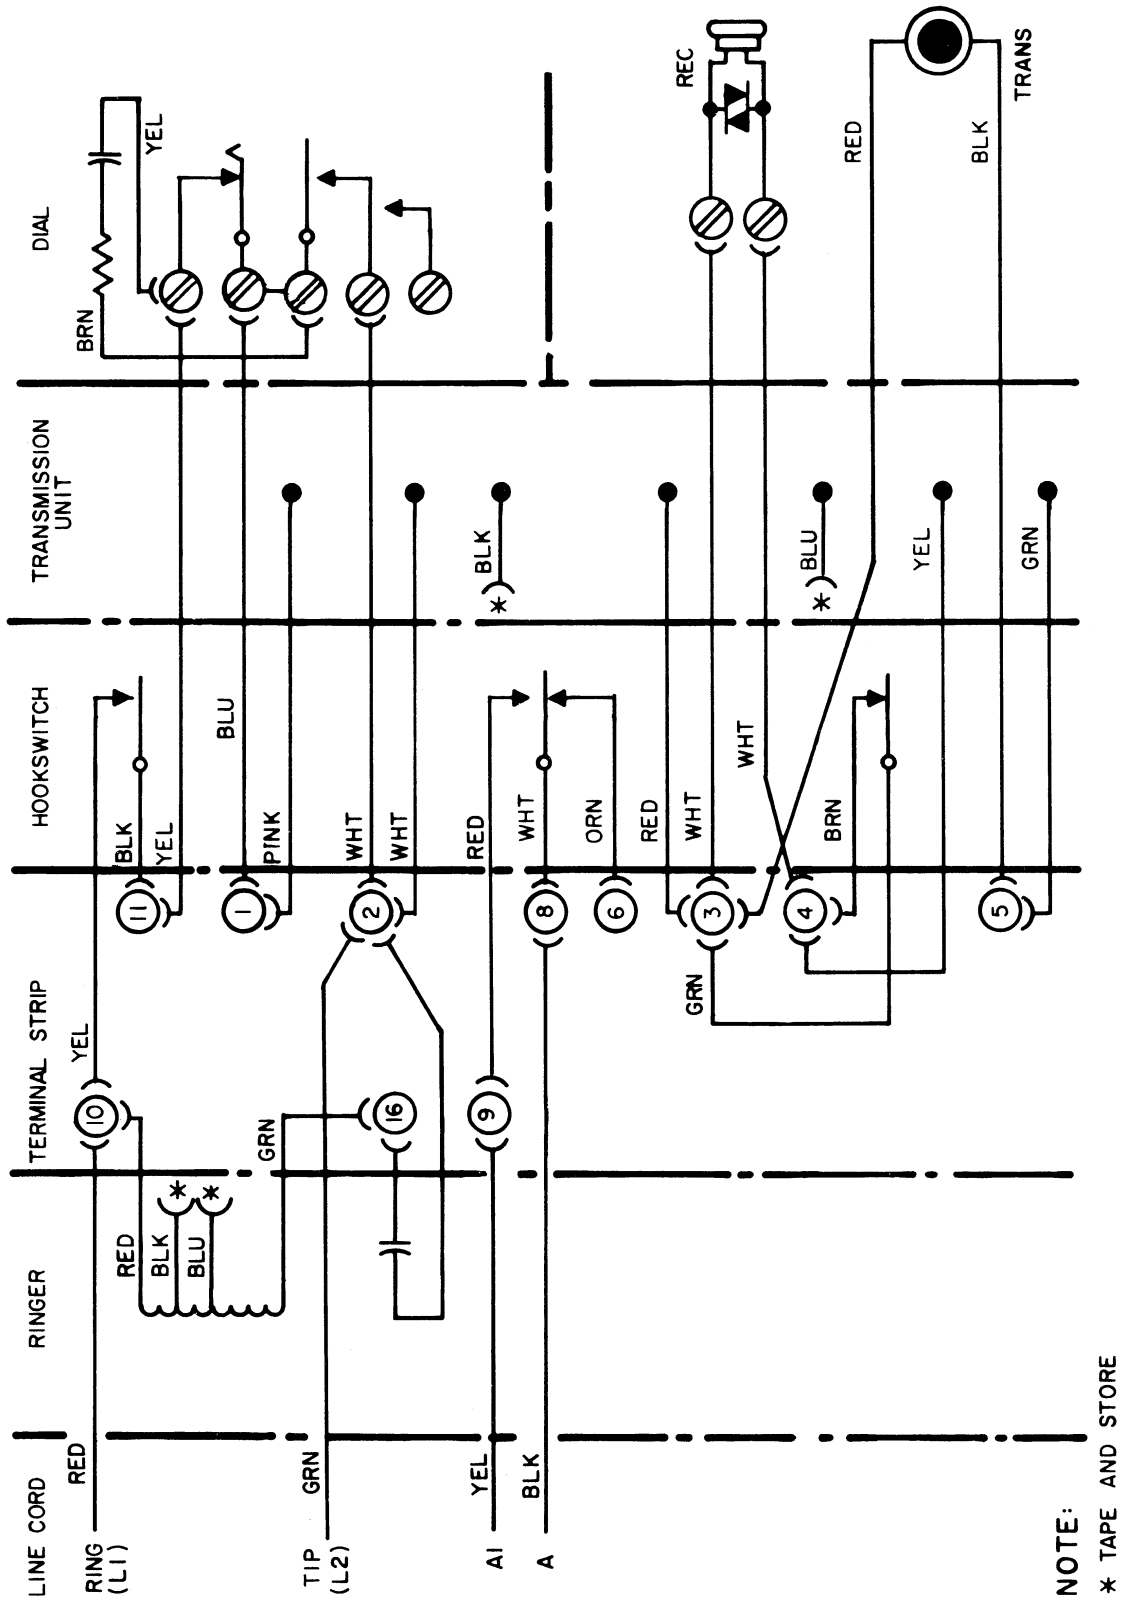


Figure 5. Wiring Diagram of Decorator Conversion Kit Wired for Use in Key Telephone System.

NOTE:  
\* TAPE AND STORE