


RELAY CODES & COMPONENTS LIST, GBW 20200  
ATTENUATOR PADS.

(900 OHMS CHARACTERISTIC IMPEDANCE.)

RELAY	BCC CODE	DIAG. FIG.	NOTES	COMPT. DESIGNATION	BPO CODE	NOTES
					FIGS. 1A & 2A.	
				R1		51Ω ± 2% 2W. RFG 5C
				R2		51Ω ± 2% 2W. RFG 5C
				R3		3.9Ω ± 2% 1/4W. RFG 5E
				R4		51Ω ± 2% 2W. RFG 5C
				R5		51Ω ± 2% 2W. RFG 5C
				C1		0.2nf ± 5% 250VW. - S.E.I.
					R1 R2 R3 R4 R5	
				FIG 1A - 2dB -	51 51 3.9K 51 51	
				FIG 1B - 1 1/2 dB -	38.3 38.3 5.23K 38.3 38.3	
				FIG 1C - 1dB -	26.1 26.1 7.87K 26.1 26.1	
				FIG 1D - 1/2 dB -	13 13 15.6K 13 13	
					1R1 1R2 1R3 1R4 1R5 (2R1) (2R2) (2R3) (2R4) (2R5)	
				FIG 2A - 2dB -	51 51 3.9K 51 51	
				FIG 2B - 1 1/2 dB -	38.3 38.3 5.23K 38.3 38.3	
				FIG 2C - 1dB -	26.1 26.1 7.87K 26.1 26.1	
				FIG 2D - 1/2 dB -	13 13 15.6K 13 13	
					FIG 2A - L292641/001. PLESSEY CODE.	
					FIG 2B - L292641/002. " "	
					FIG 2C - L292641/003. " "	
					FIG 2D - L292641/004. " "	
					FIG 1A - L292640/001. " "	
					FIG 1B - L292640/002. " "	
					FIG 1C - L292640/003. " "	
					FIG 1D - L292640/004. " "	


NOTES: - A SPECIAL FACTORS OF SAFETY B SPECIAL ADJUSTMENT

FIGS. 1A-1B-1C & 1D.

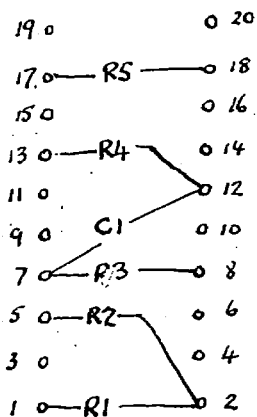

LAYOUT

FIGS. 2A-2B-2C & 2D.

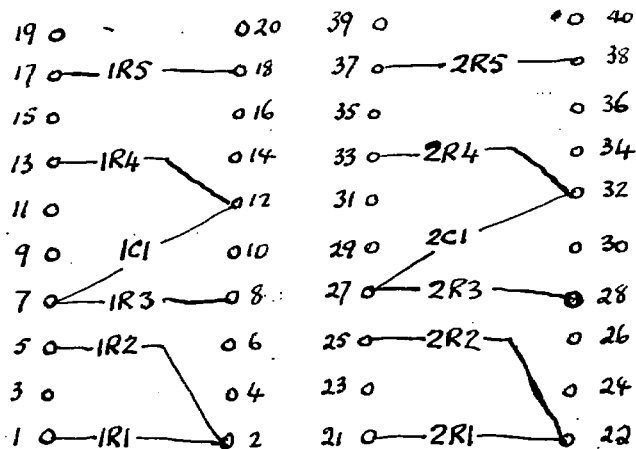

NZPO  
 (9982) 7-7-73. DLM  
 ISSUE  
 REDRAWN.  
 FIGS. 344 DELETED.  
 155063 - 30-2-71

ORIGINATED BY	A.T.&E.C.
DATE	29-4-71
SIGNED FOR COMMITTEE	AB.

Centimetres

