


ISSUE	REVISED	DATE
1	5-20-82	
2	7-30-82	
3	10-28-82	
4		



- NOTES:
- UNLESS OTHERWISE SPECIFIED:
ALL RESISTORS ARE 1/4 WATT.
ALL RESISTORS ARE 5%.
ALL RESISTORS ON VALUES IN OHMS.
ALL 2 WATT RESISTORS ARE WIRE WOUND.
ALL DIODES ARE 1N4001 OR EQUIVALENT.
ALL CAPS. ARE 200 VDC, VALUES IN MFD.
 - I.C. INVENTORIES IS AS FOLLOWS:
A1 = 352
A2 = MOC8050
A3, A5, A7, A8, A14, A23 & A25 = 4001
A6, A15, A17, A18, A20 & A24 = 4013
A9 = 4029
A10 = 4013
A11 = 4013
A12, A13 & A22 = 4013
A16 = 4017
A27 = 4017
 - STRAP "L2" OF CIRCUIT IS TO DROP SWITCH TRAIN TO L2 LINE WITH REVERTIVE CALL.
 - P1 TO P2 SHOULD BE STRAPPED TO APPROPRIATE RING CODES.
 - STRAP OR FOR DIVIDED RINGING.

DATE	SIGNATURE & DATE	 HUNTSVILLE ALABAMA 35802	REVERTIVE CALL OR INSPECTORS RINGBACK CIRCUIT
CHK			
DR			
ENGR			
APPD			
DATE		 DIP	C600150

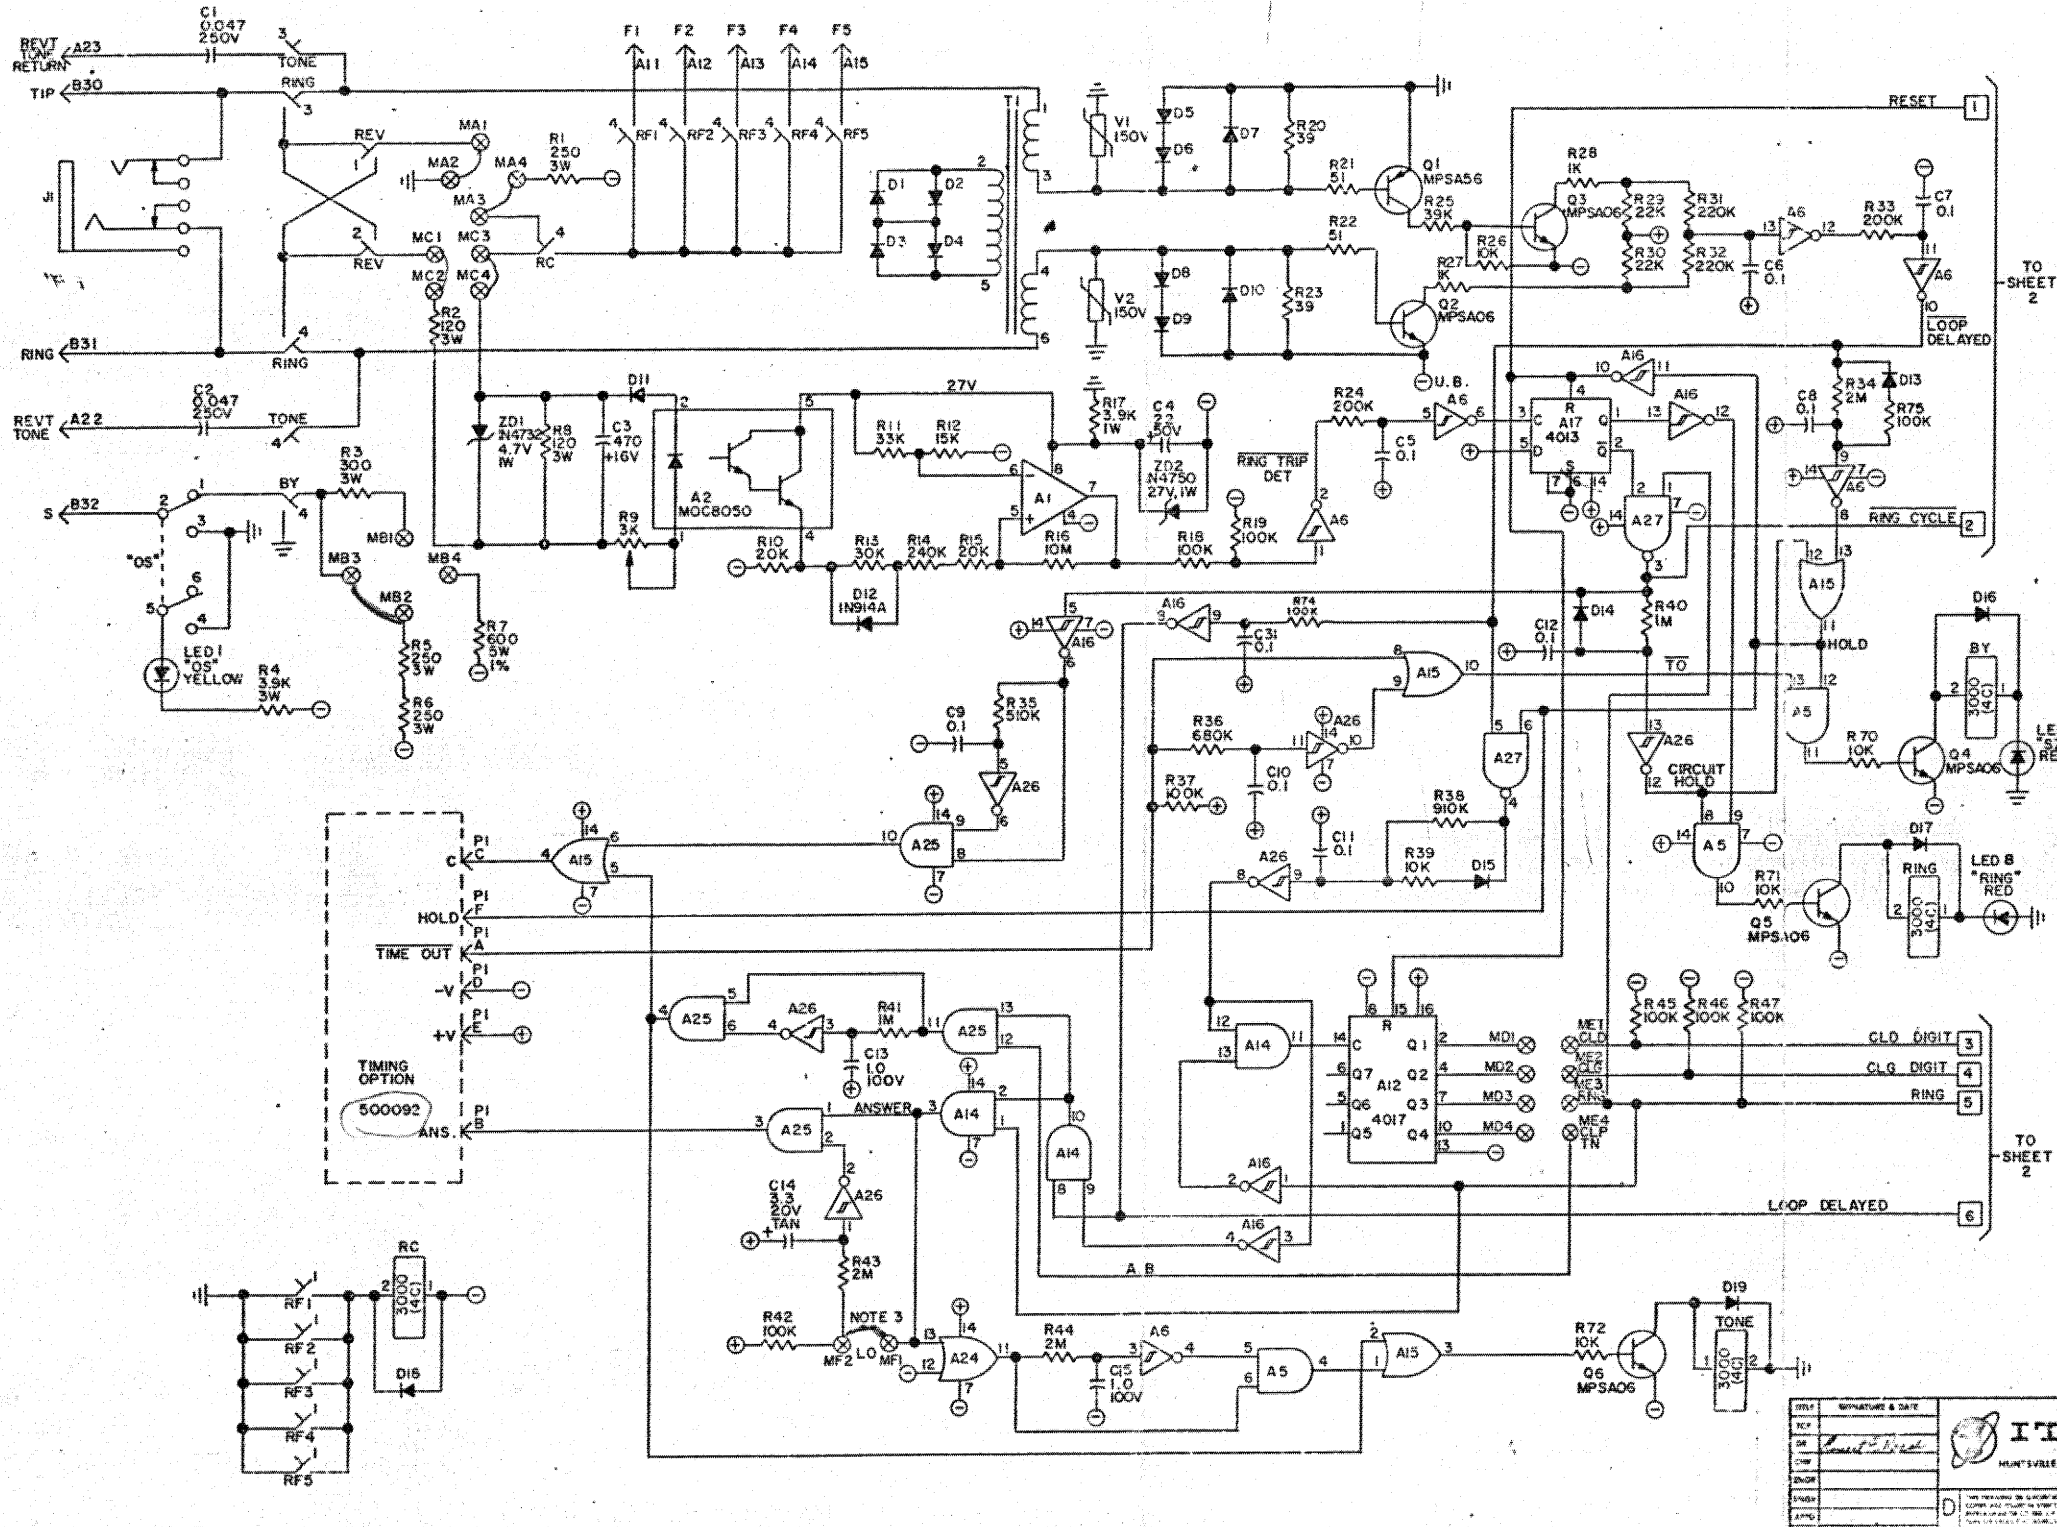