
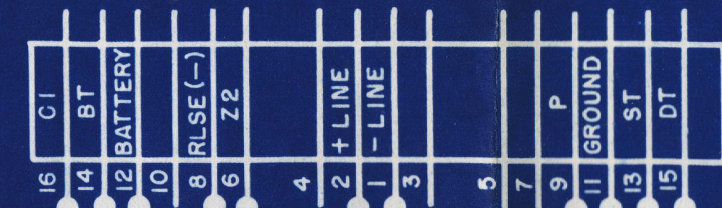


FIG. 1,2

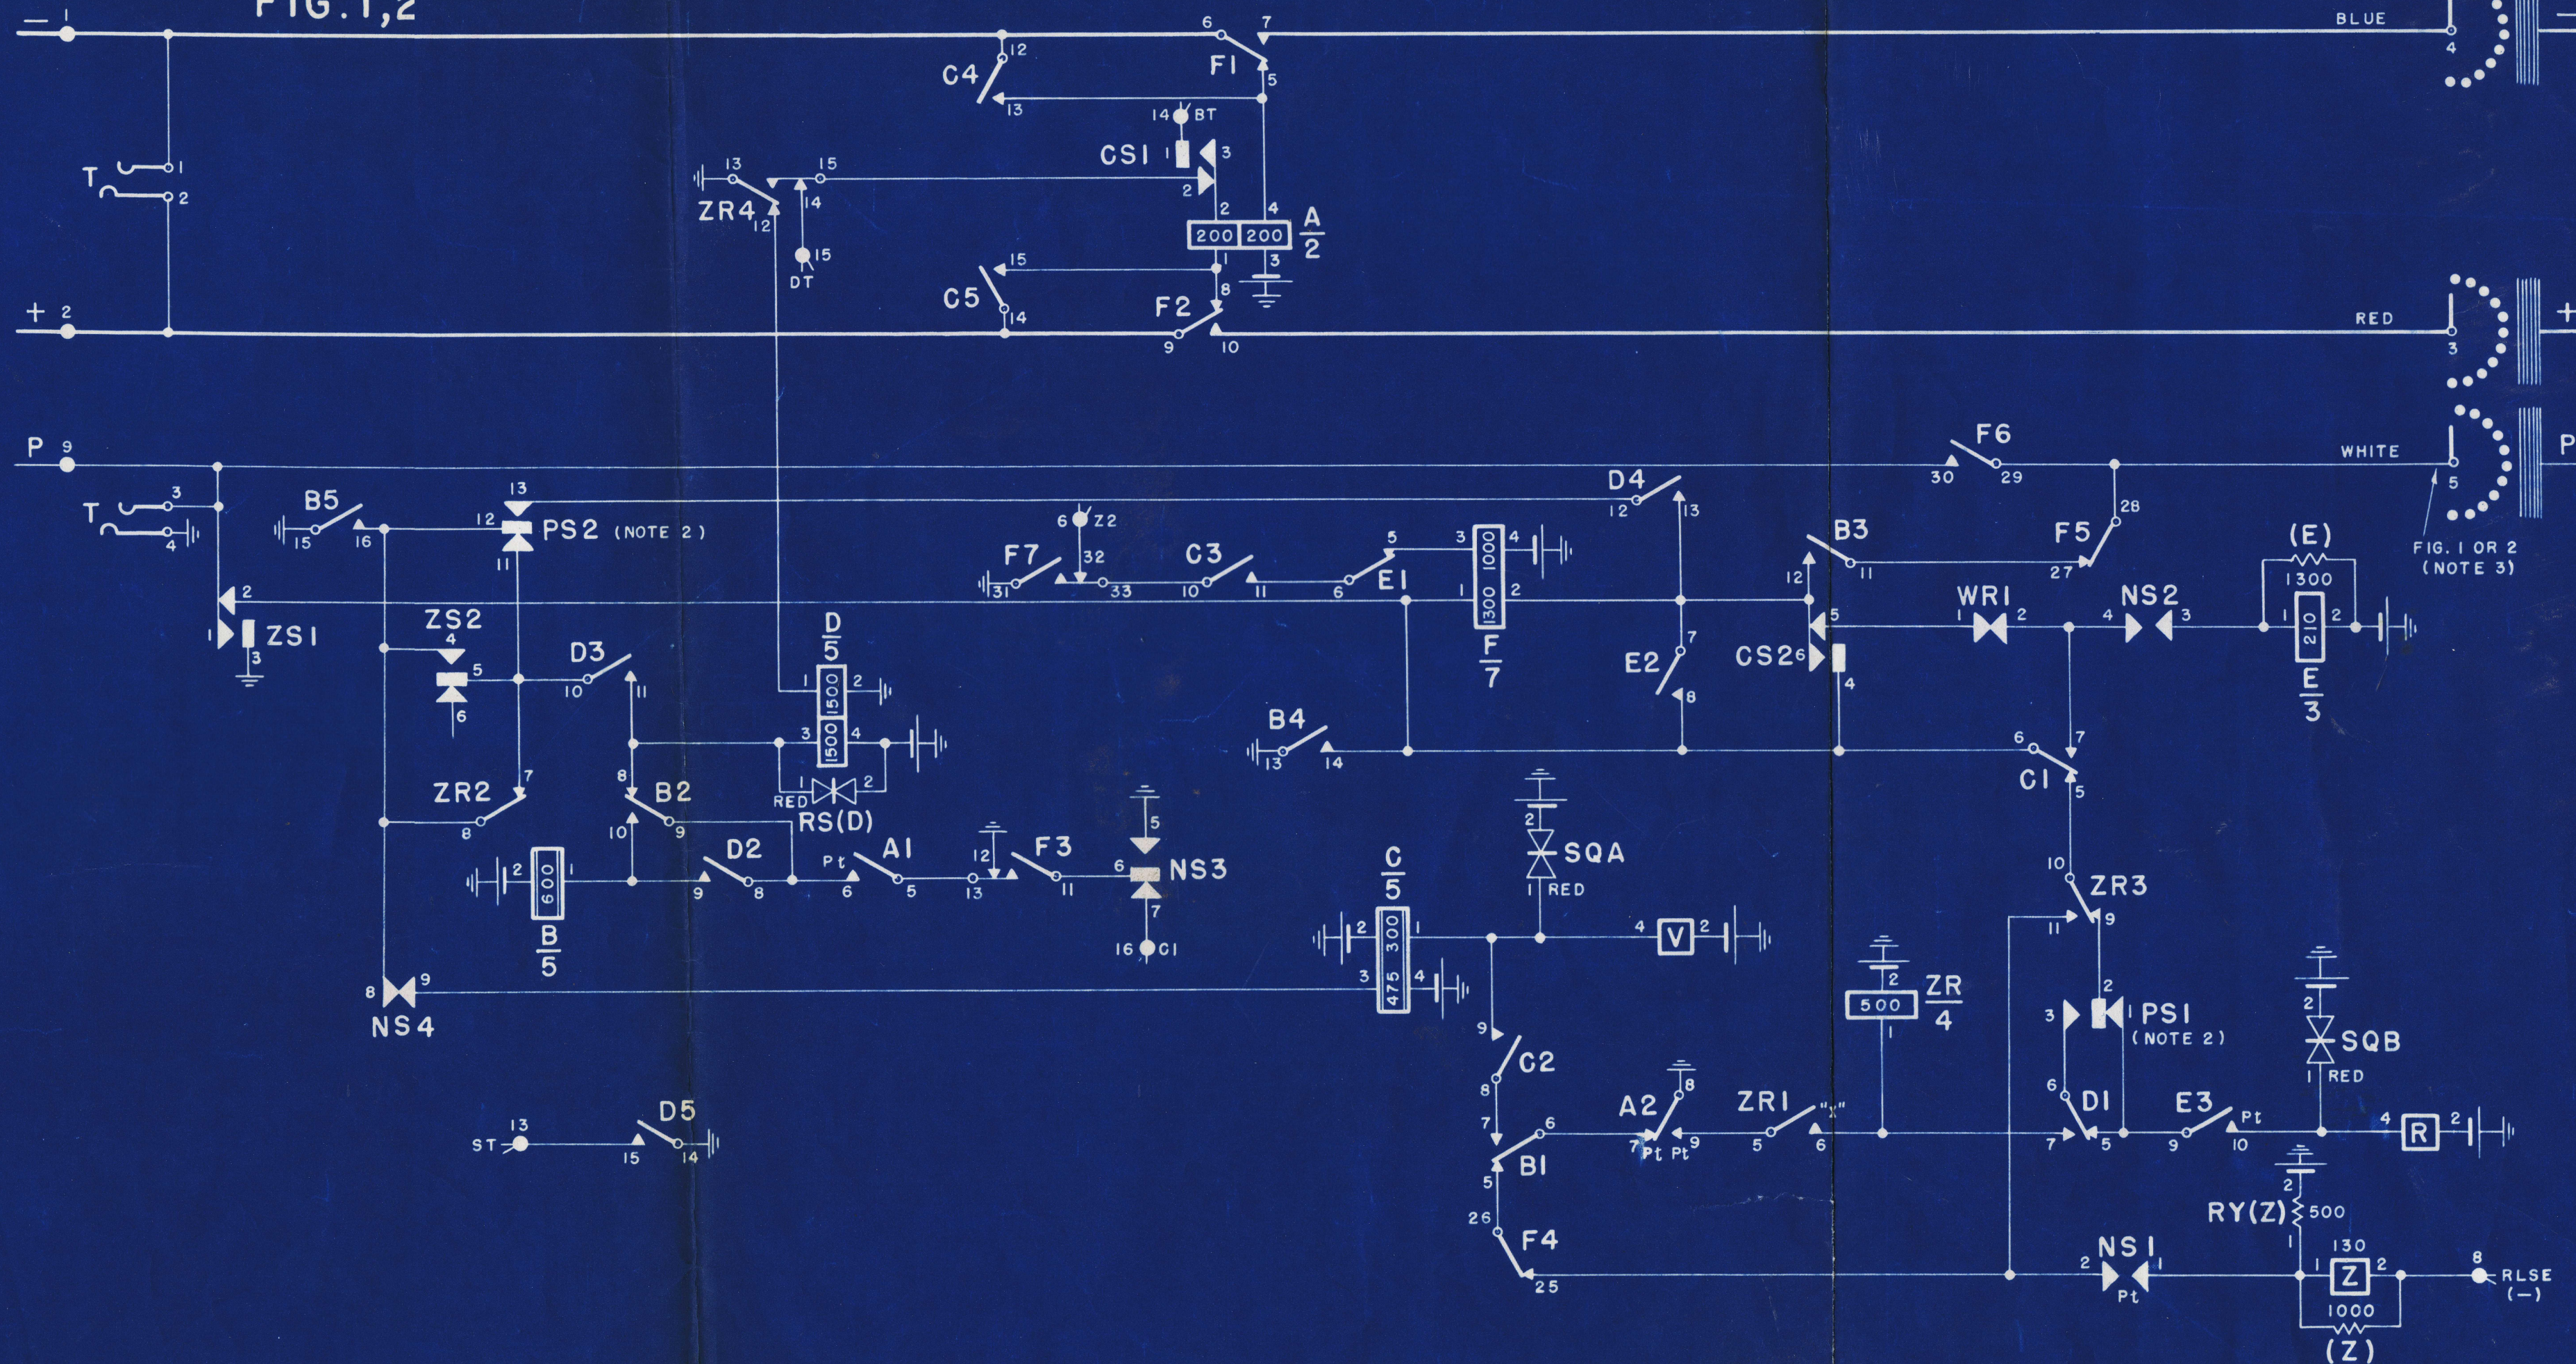

TO SHELF SUPPLY CCT.

FROM SELECTOR LOCKOUT TIMER

FROM LINE FINDER JACK OR SELECTOR BANK

- NOTES:
- (1) TERMINALS U-9 & U-11 OF SHELF JACK TO MAKE WHEN SWITCH IS REMOVED.
 - (2) ADJUST PS1 TO OPERATE ON LEVELS REQUIRING REPEATED ABSORPTION UNTIL LEVEL ARRANGED TO ABSORB ONCE HAS BEEN DIALED.
ADJUST PS2 TO OPERATE ON LEVELS REQUIRING BUSY TONE UNLESS LEVEL ARRANGED TO ABSORB ONCE HAS BEEN DIALED.
ADJUST PS1 & PS2 TO OPERATE ON LEVELS TO ABSORB ONLY ONCE.
PS1 IS LEFT SIDE, PS2 IS RIGHT SIDE.
 - (3) USE FIG.1 WHEN THIS SWITCH IS MOUNTED ON A 330 POINT BANK DOUBLE PRIVATE WIPER STRAPPED AND NO PARTIAL LEVEL RESTRICTION REQUIRED.
USE FIG.2 WHEN THIS SWITCH IS MOUNTED ON A 440 POINT BANK WITH PRIVATE WIPERS NOT STRAPPED AND PARTIAL LEVEL RESTRICTION IS REQUIRED AND BUSY TEST IS MADE ON LOWER PRIVATE BANK TERMINALS.
P AND PI BANK TERMINALS OF LOCAL LEVELS MUST BE STRAPPED WHEN 440 POINT BANK IS EQUIPPED.

A	1E	2D	3F
B	3C	3E	2C 2F 2E 2B
C	3E	2G 3E 2E 1D 1D	
D	2C	3G 2C 2C 2F 3C	
E	2G	2E 2F 3G	
F	2E	3E 2G 2F 2D	
ZR	3F	3F 2C 2G 1C	
NS		3G 2G 2D 3C	
CS	11th ST	1D 2F	
WR		2F	
ZS		2B 2C	
PS		3G 2C	

SCALE		DRAWN		CHECKED		ENGINEER		APPROVED	
		C.C.				J. J. 2.2		J. J. 2.2	
FIRST SELECTOR ARRANGED FOR DIGIT ABSORBING ONCE ONLY AND/OR REPEATEDLY AND TIMED RELEASE									
DWG. E SIZE		C-10504				ISSUE		2	
FEDERAL TELEPHONE AND RADIO COMPANY A DIVISION OF EATON, NEW JERSEY									