


# Northern Electric 1500D / 2500D / 2554B Telephone Sets

N.E.P.\_502-510-450CA

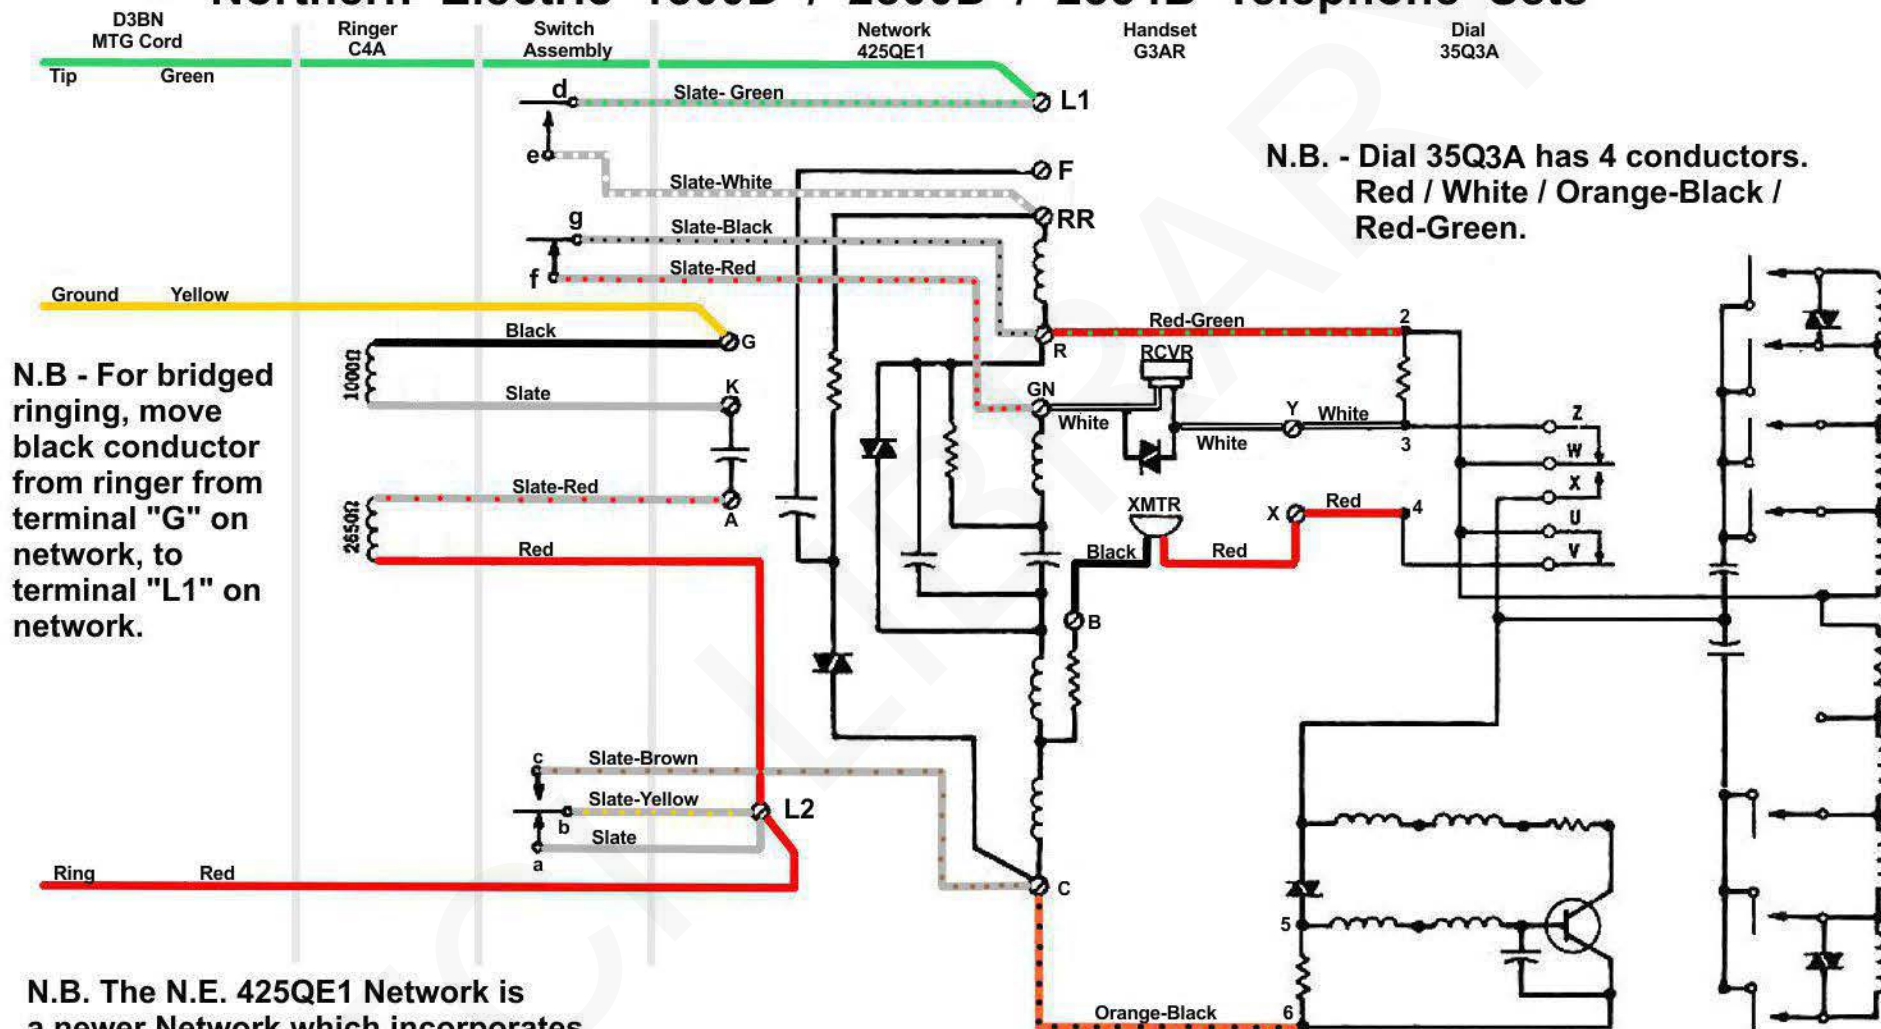

N.B - For bridged ringing, move black conductor from ringer from terminal "G" on network, to terminal "L1" on network.

N.B. - Dial 35Q3A has 4 conductors. Red / White / Orange-Black / Red-Green.

N.B. The N.E. 425QE1 Network is a newer Network which incorporates 2 additional terminals, "X" and "Y". They are not part of the internal network circuitry. They are strictly terminal connection points.

1500D, 2500D, and 2554B Telephone Sets with 425QE1 Network and 35Q3A Dial

N.B. - Dial Connections	
Dial Conductor	Network
Red .....	"X"
White .....	"Y"
Orange-Black .....	"C"
Red-Green .....	"R"