


AS SEEN FROM REAR

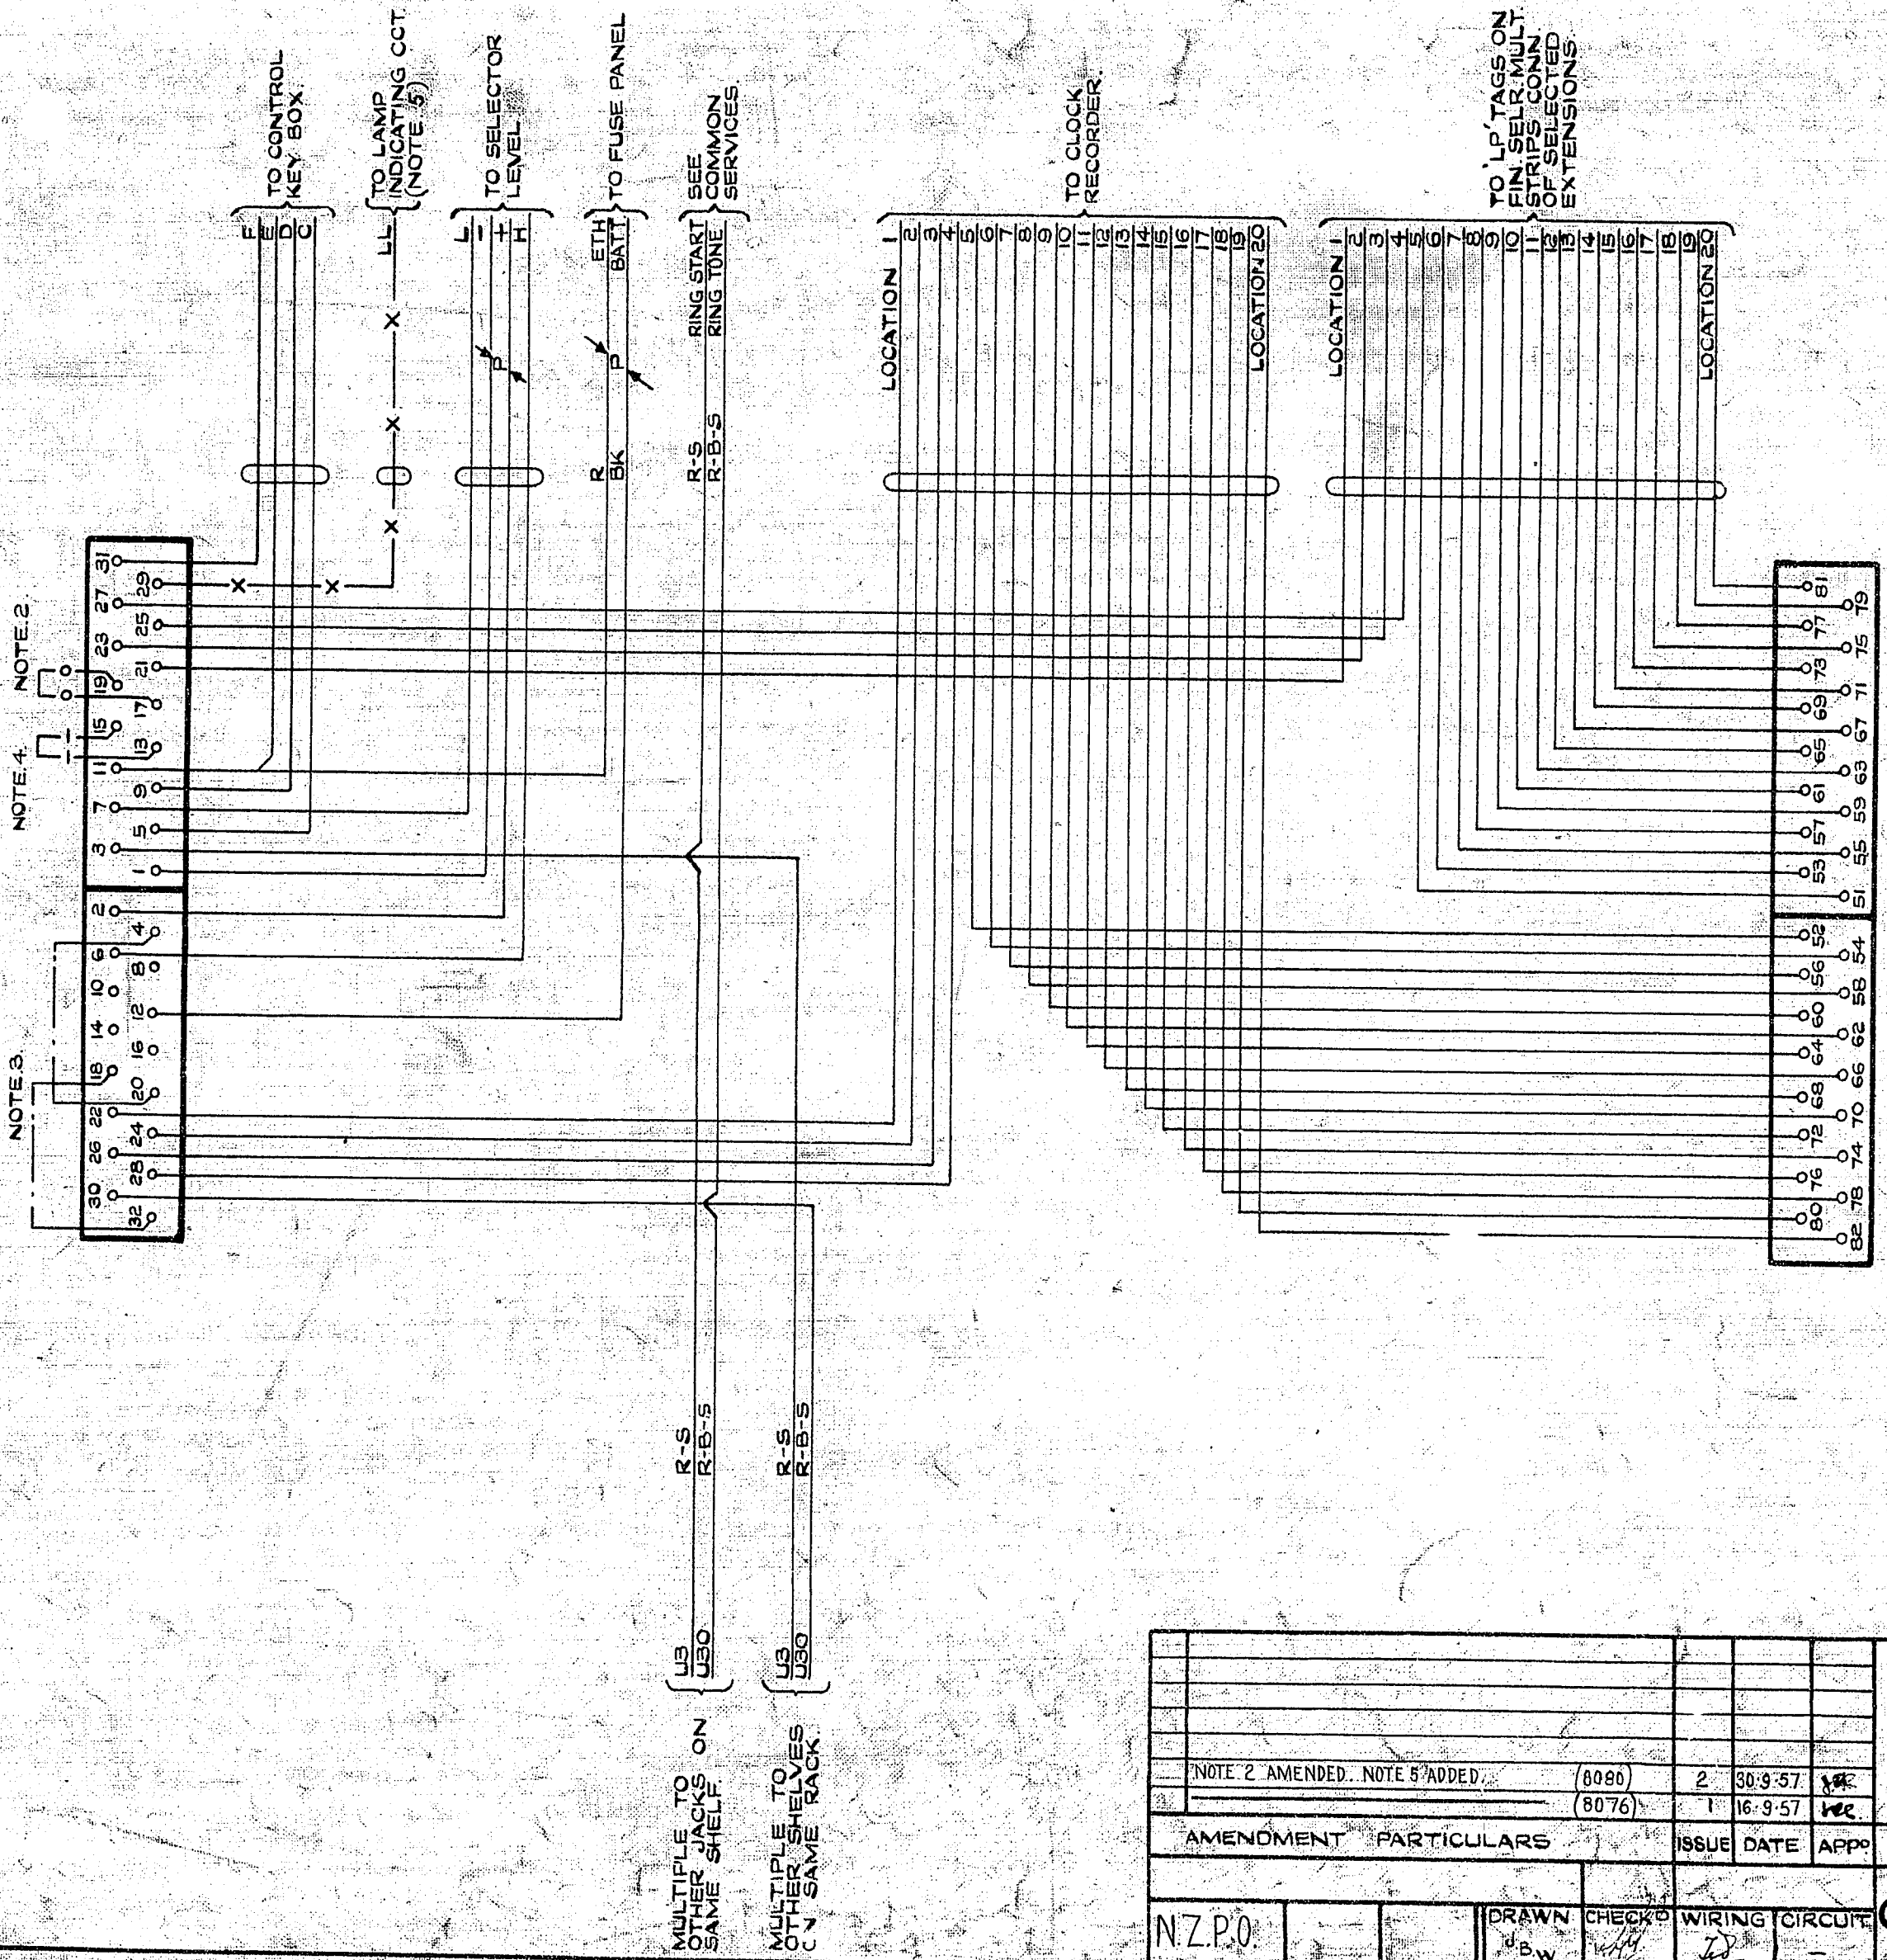

NOTES

1. ALL WIRING BEARING A COLOUR CODE TO BE 22 SWG.
2. FOR NON-SEQUENTIAL WORKING ADD STRAP SHOWN 0
3. STRAPS SHOWN THUS ARE TYPICAL ONLY. FOR ACTUAL STRAPPING REQUIRED TO OBTAIN A GIVEN ALARM DELAY (i.e. MAX ALLOWABLE INTERVAL BETWEEN TWO CALLS) SEE TABLE A.
4. WHEN ALARM IS TO BE CANCELLED BY NEXT CALL, ADD STRAP SHOWN 1
5. WHEN 'LAMP' INDICATION IS REQUIRED WITH SEQUENTIAL WORKING, ADD CONNECTION SHOWN X

TABLE A
(NOTE 3)

ALARM DELAY (MINS)	SHELF JACK POINTS TO BE STRAPPED
5	18 - 32 & 4 - 20
10	18 - 32 & 8 - 20
15	18 - 32 & 10 - 20
20	18 - 32 & 14 - 20
25	18 - 32 & 16 - 20
30	16 - 18 & 4 - 20
35	16 - 18 & 8 - 20
40	16 - 18 & 10 - 20
45	16 - 18 & 14 - 20

NIGHT WATCHMAN'S CIRCUIT (20 LOCATIONS) 50/1200 LINE PABX				50Y	W
AMENDMENT PARTICULARS		ISSUE DATE	APPRO		
NOTE 2 AMENDED... NOTE 5 ADDED		(8080)	2	30.9.57	VER
		(8076)	1	16.9.57	VER
N.Z.P.O.	DRAWN D.W.	CHECKED M.H.	WIRING	CIRCUIT	
GBU. 14560.					