

0
5 Centimetres
10
15
20
25
30


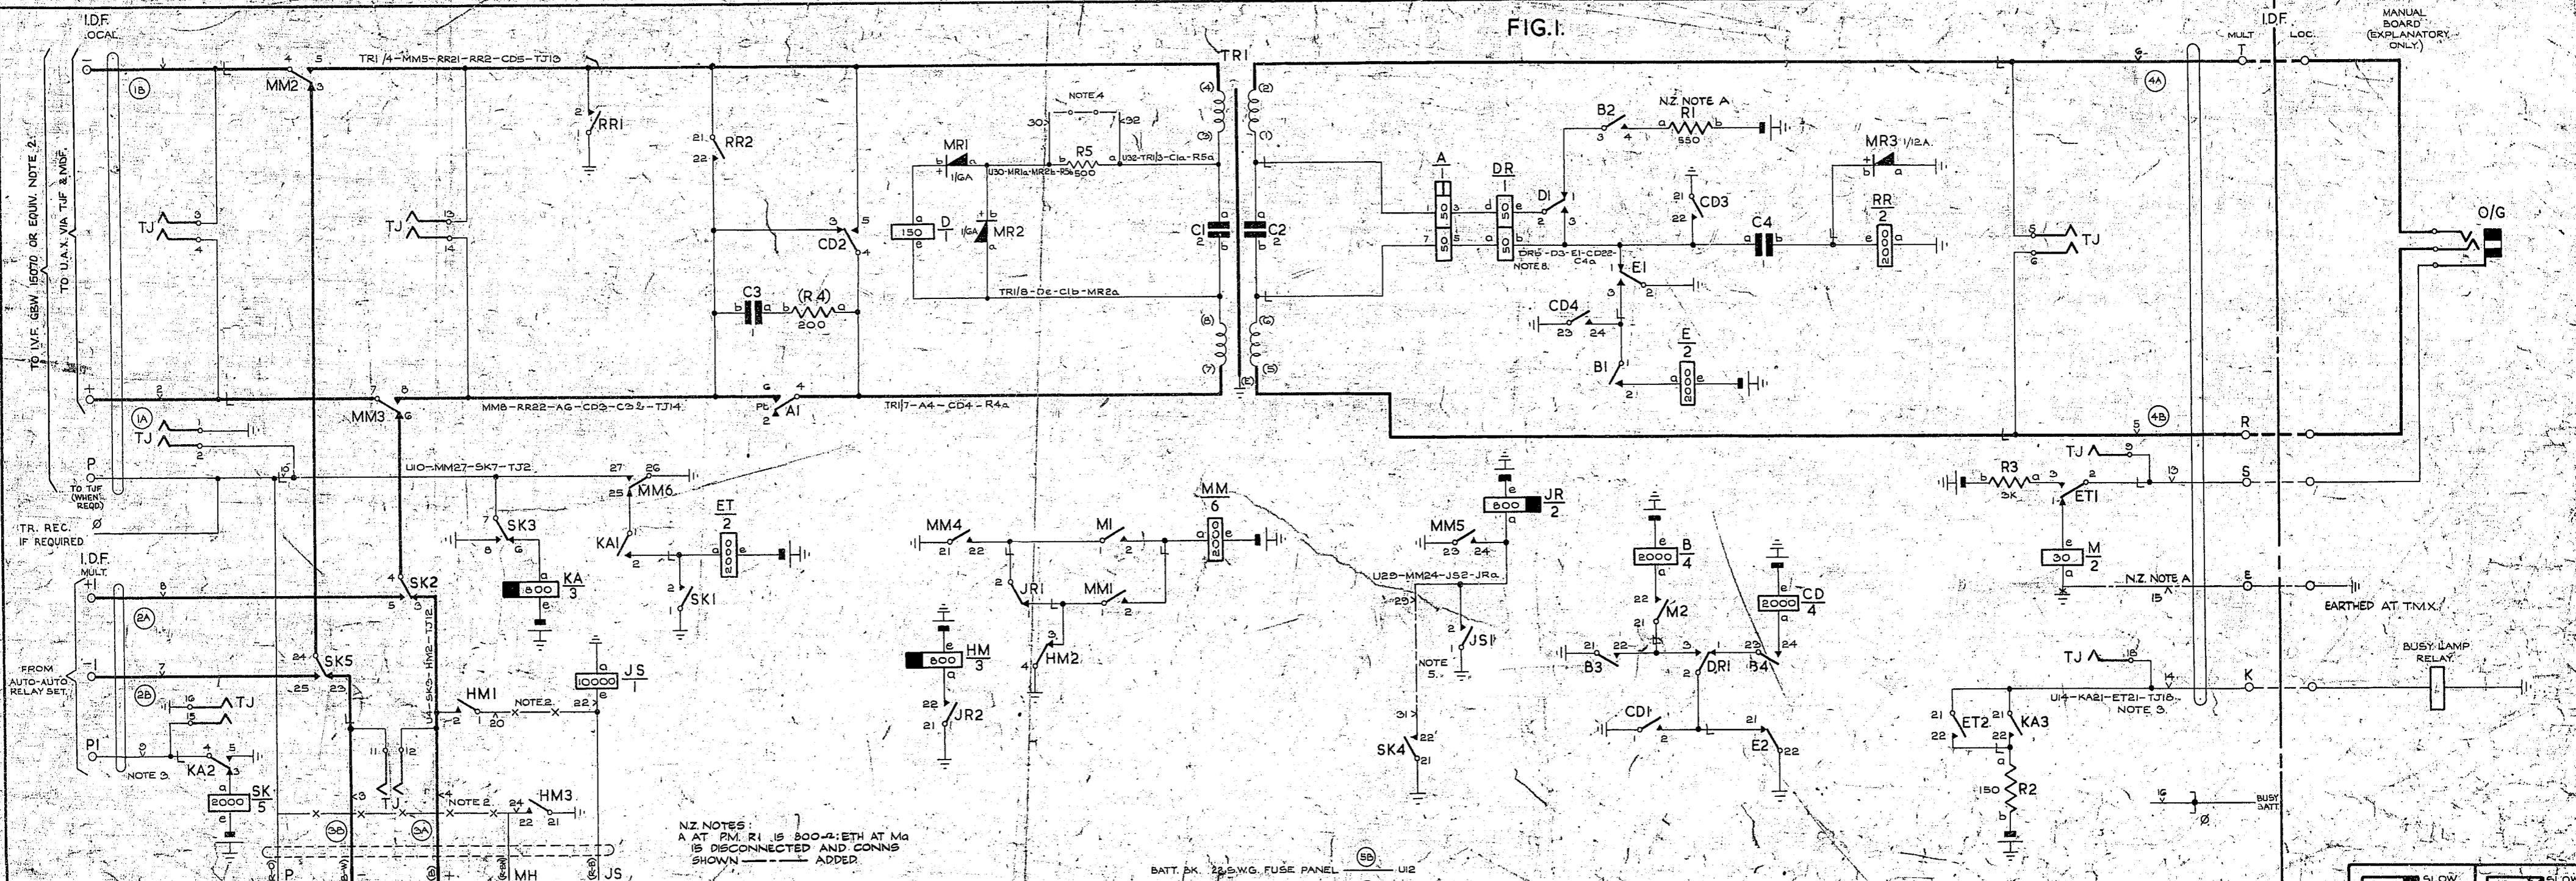


FIG. 1.

- NOTES:-
1. FUSING 1.5A PER CIRCUIT.
 2. FOR UNIDIRECTIONAL JUNCTIONS P, +, MH & JS LEADS ARE NOT CONNECTED & STRAPS SHOWN - X - ARE ADDED FOR B/W JUNCTIONS OMIT STRAPS - X - & CONNECT TO GBW 13820 AS SHOWN. FOR I.V.F. JUNCTIONS P, +, MH & JS LEADS ARE NOT CONNECTED & STRAPS - X - ARE OMITTED.
 3. SHELF JACK POINTS U2 & U11 AND U14 & U16 MAKE CONTACT WHEN RELAY SET IS JACKED OUT.
 4. STRAP U30 - U32 WHEN JUNCTION RESISTANCE EXCEEDS 500Ω.
 5. WHEN A MULTI-METERING RELAY SET IS USED IN CONJUNCTION WITH THIS CCT REMOVE STRAP BETWEEN U29 - U31 SHOWN.
 6. ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
 7. Ø FOR WIRING SEE GBW 10640 OR EQUIVALENT.
 8. RELAY DR IS DIFFERENTIALLY CONNECTED.

NZ NOTES:
A AT PM R1 IS 800Ω ETH AT M4 IS DISCONNECTED AND CONNS SHOWN - - - - - ADDED.

BATT. BK. 25 SWG. FUSE PANEL (5B) U12
EARTH. R. 25 SWG. EARTH BAR. (5A) U11
BATT. W. U12 - MME - SKE - HME - KAE - BE - Ee - JRE - CDe - ETe - RI2 - R22 - R32
ETH. R. U11 - TRI/E - MM21 - MM23 - MM26 - JSa - JS1 - RRA - RRI - SK21 - SKb - SK1 - MC - HM21 - HM4 - KA5 - B21 - E22 - E2 - JR21 - CD21 - CD3 - CD1 - MR3a - TJ1 - TJ16



AMENDMENT PARTICULARS	ISSUE	DATE	APPD.	REF. GBW 21-17 MOD.	SIZE	BOX	W.
NZ NOTE A' ADDED	(50933)	4A	3-10-62	DBH.			
BATT & ETH LEADS WERE SHOWN 20 SWG (35078)		4	14-11-60	AK			
NOTES 2 & 4 AMENDED REFS. TO I.V.F. ADDED (33739)		3	21-8-59	AK			
TR. REC. LEAD ADDED NOTE 6 CHANGED	(32140)	2	1-7-59	AK			
	(44702)	1	20-12-54	AK/H			



O/G JUNCTION RELAY SET WITH BOTHWAY SWITCHING TO U.A.X.N.Z. NO. 13 - PARENT FOR W.E. Co. B.C.S. SWBD. 2000 TYPE

GBW 13580

MANUAL BOARD (EXPLANATORY ONLY)