

SERVICE

500R/S TELEPHONE SETS

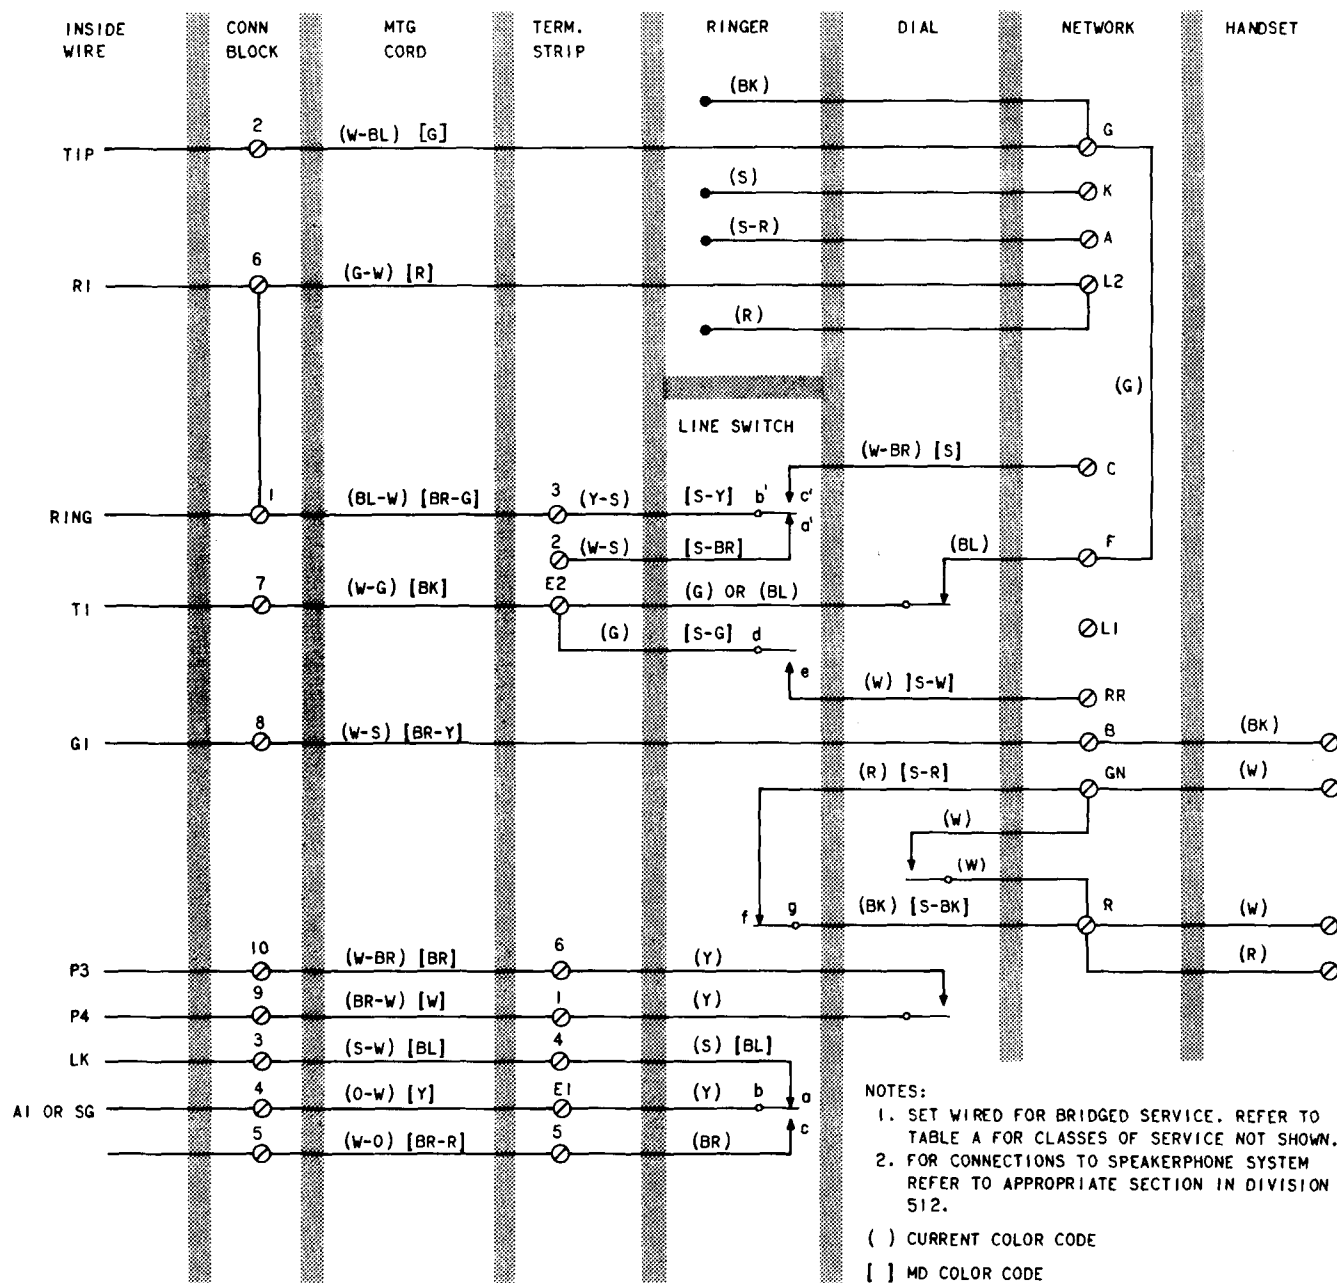


Fig. 1—500R/S Telephone Set, Connections

TABLE A
LINE AND RINGER CONNECTIONS

WIRE OR LEAD	COLOR	RING PARTY	TIP PARTY NO IDENT GROUND	TIP PARTY IDENT GRD	
				1000Ω	2650Ω
Mtg Cord in Set*	(W-BL) [G]	F	F	F	F
Strap from G Term. on Net. to	(G)	E1	E1	E1	E1
Ringer	(R)	L2	L2	K	B
	(BK)	G	G	G	B
	(S)	K	K	B	K
	(S-R)	A	A	B	G
Line Switch	(W-S) [S-BR]	Term. 2	Term. 2	A of Net.	A of Net.
Mtg Cord at Conn Block* (Line Only)	(G-W) [R]	1	2	2	2
	(W-BL) [G]	2	1	1	1
	(BL-W) [BR-G]	1	2	2	2

* Only the optional mounting cord leads are shown in the table. Connections for the remaining mounting cord leads are shown in Fig. 1.

() Current color code

[] MD color code

Note: To permanently silence ringer, remove insulate and store:

- Individual, ring or tip party without identifying ground — (R) ringer lead
- 1000 ohm ident grd. — (R) ringer lead
- 2650 ohm ident grd. — (S) ringer lead