

SERVICE

570 TELEPHONE SETS

1. GENERAL

1.01 The 8-type apparatus units contain all the electrical components of the 570-type (emergency reporting) telephone sets.

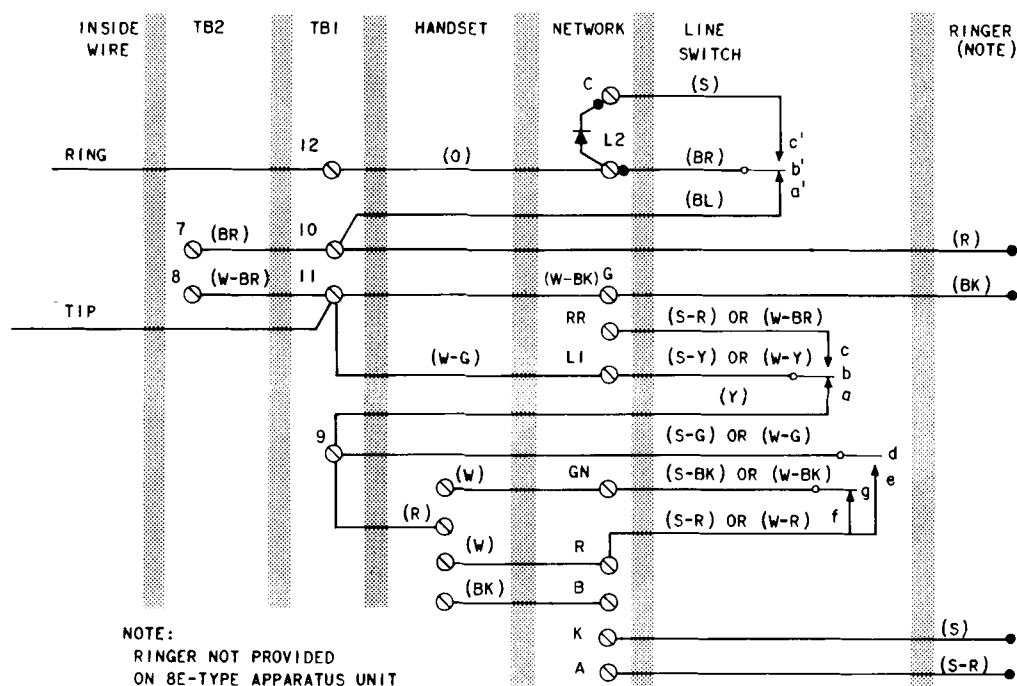


Fig. 1—8A (MD) and 8E (MD) Apparatus Units, Connections

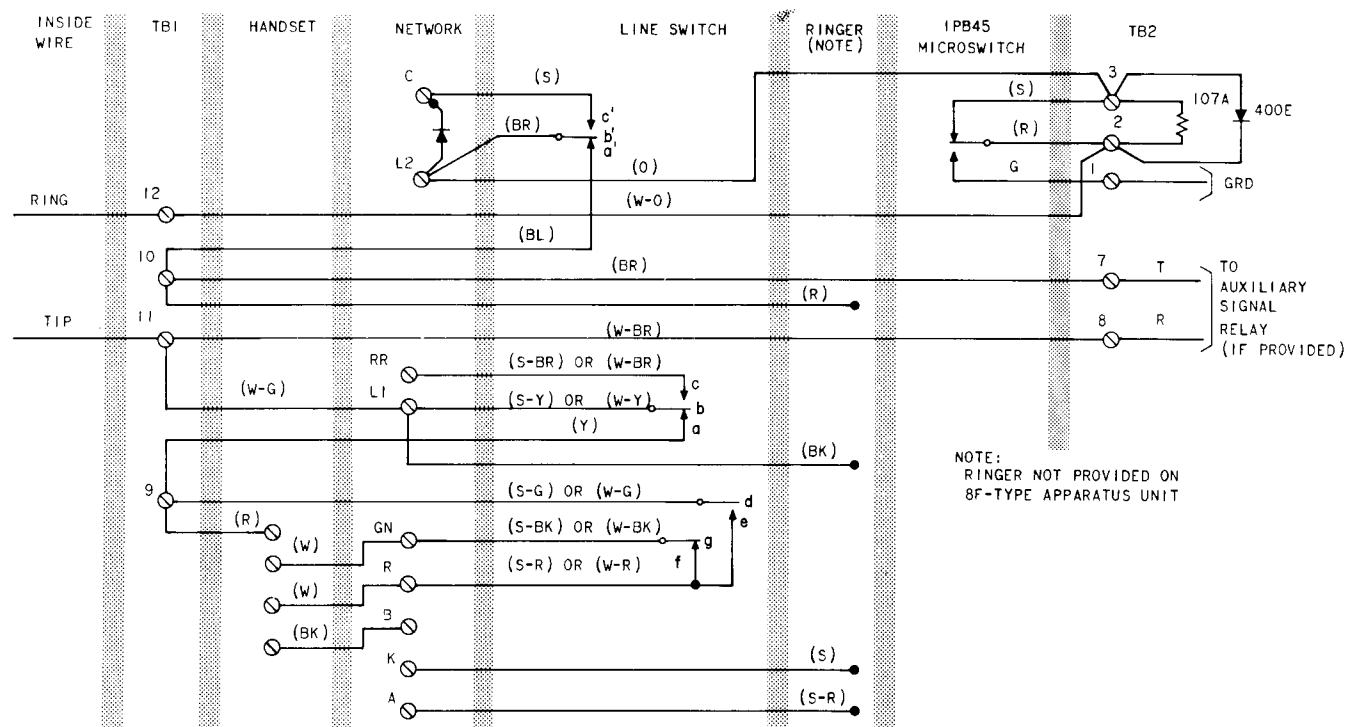


Fig. 2—8B (MD) and 8F (MD) Apparatus Units, Connections

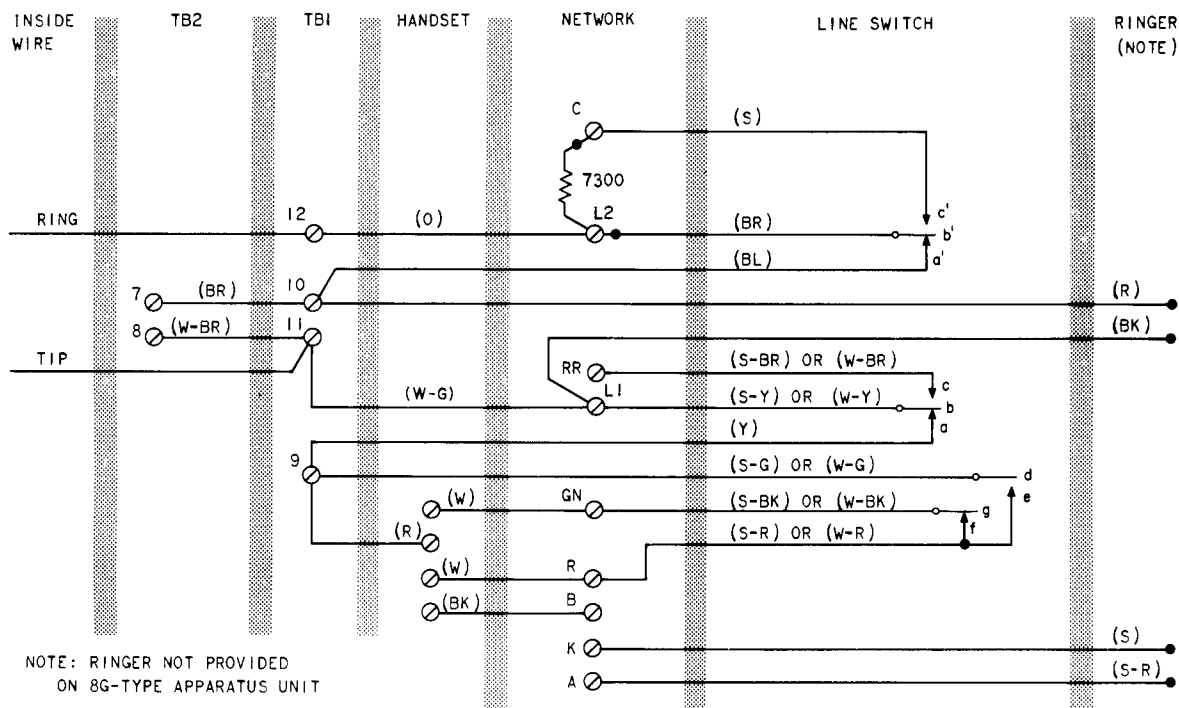


Fig. 3—8C (MD) and 8G (MD) Apparatus Units, Connections


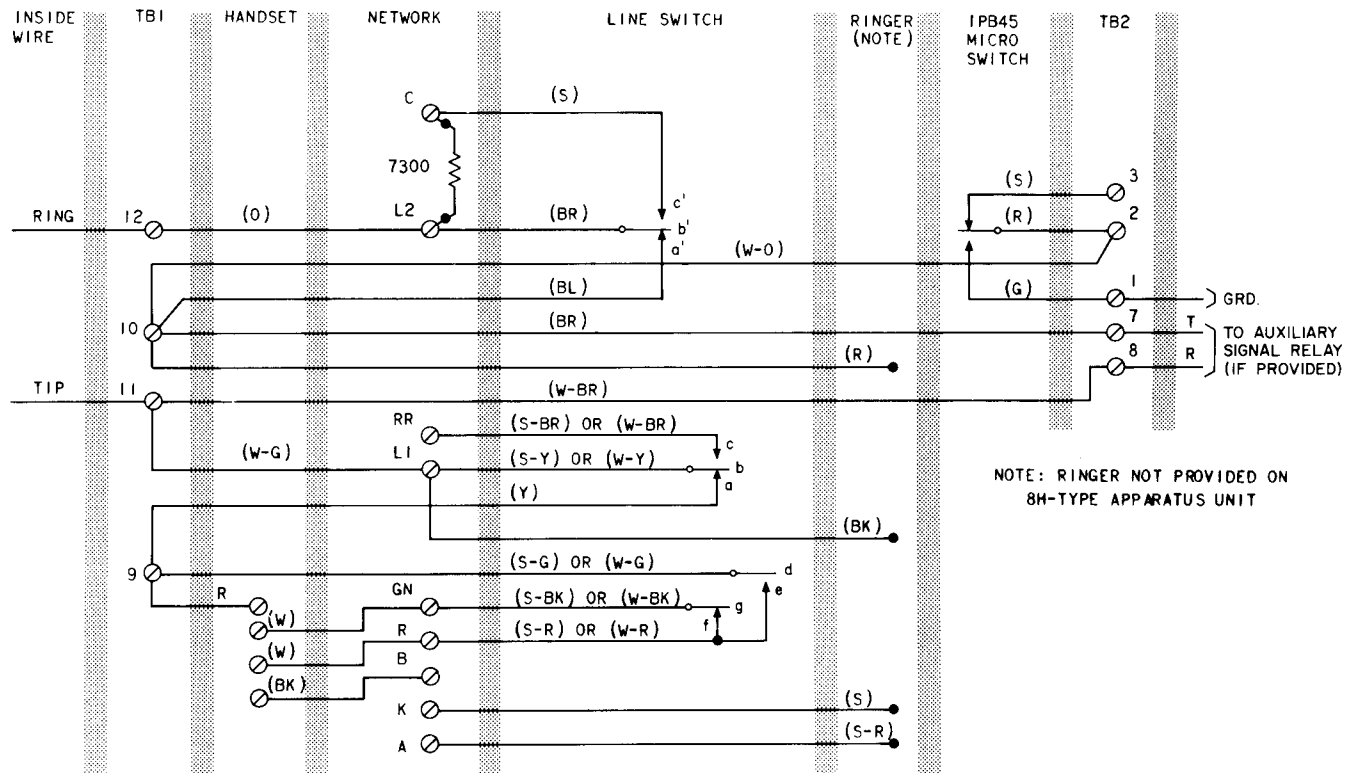


Fig. 4—8D (MD) and 8H (MD) Apparatus Units, Connections

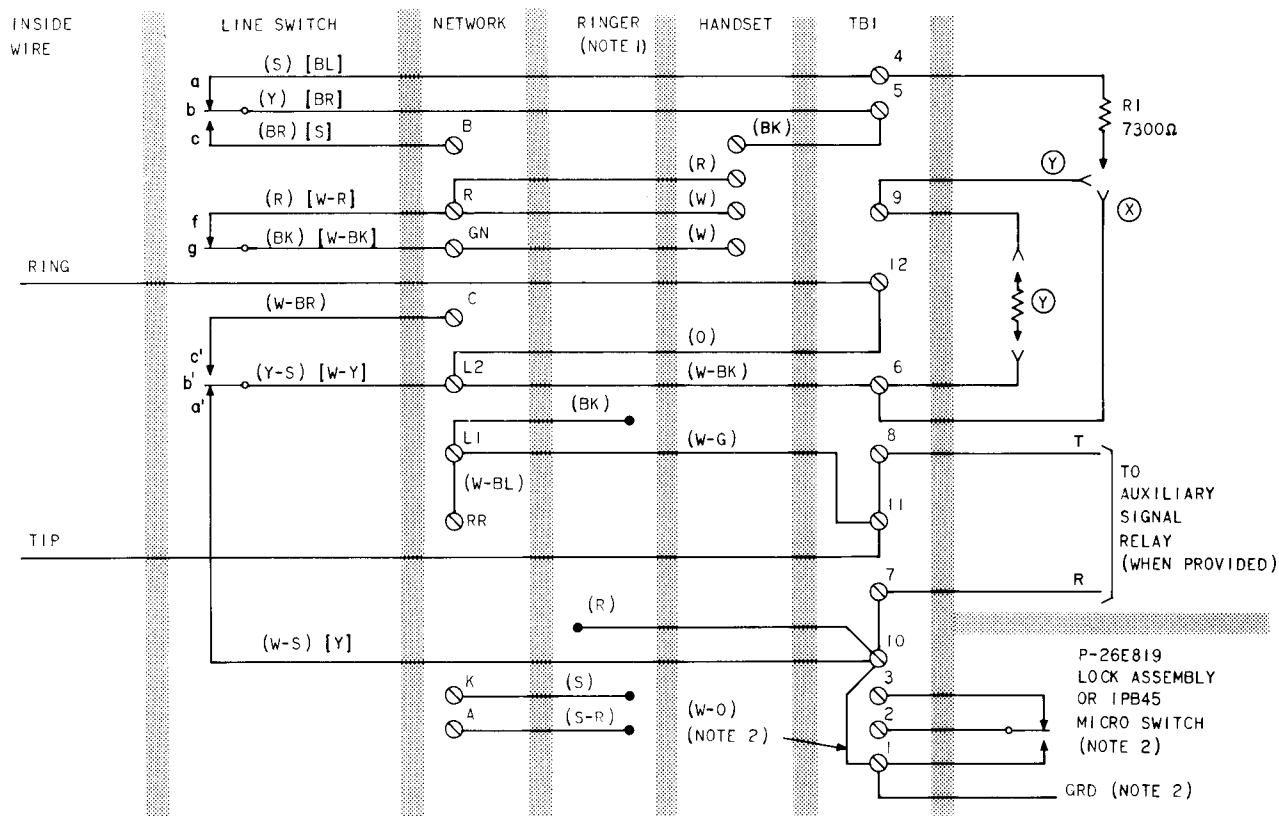

NOTES:

1. RINGER NOT PROVIDED IN 8N- AND 8P-TYPE APPARATUS UNIT
 2. NOT PROVIDED ON 8J- AND 8N-TYPE APPARATUS UNIT
- (X) FACTORY WIRING ARRANGEMENT
 (Y) UNIGAGE OUTSIDE PLANT
 (KS-14603L2C 3700 OHM) RESISTOR
 () CURRENT COLOR CODE
 [] MD COLOR CODE

Fig. 5—8J-, 8K-, 8N-, and 8P-Type Apparatus Units, Connections

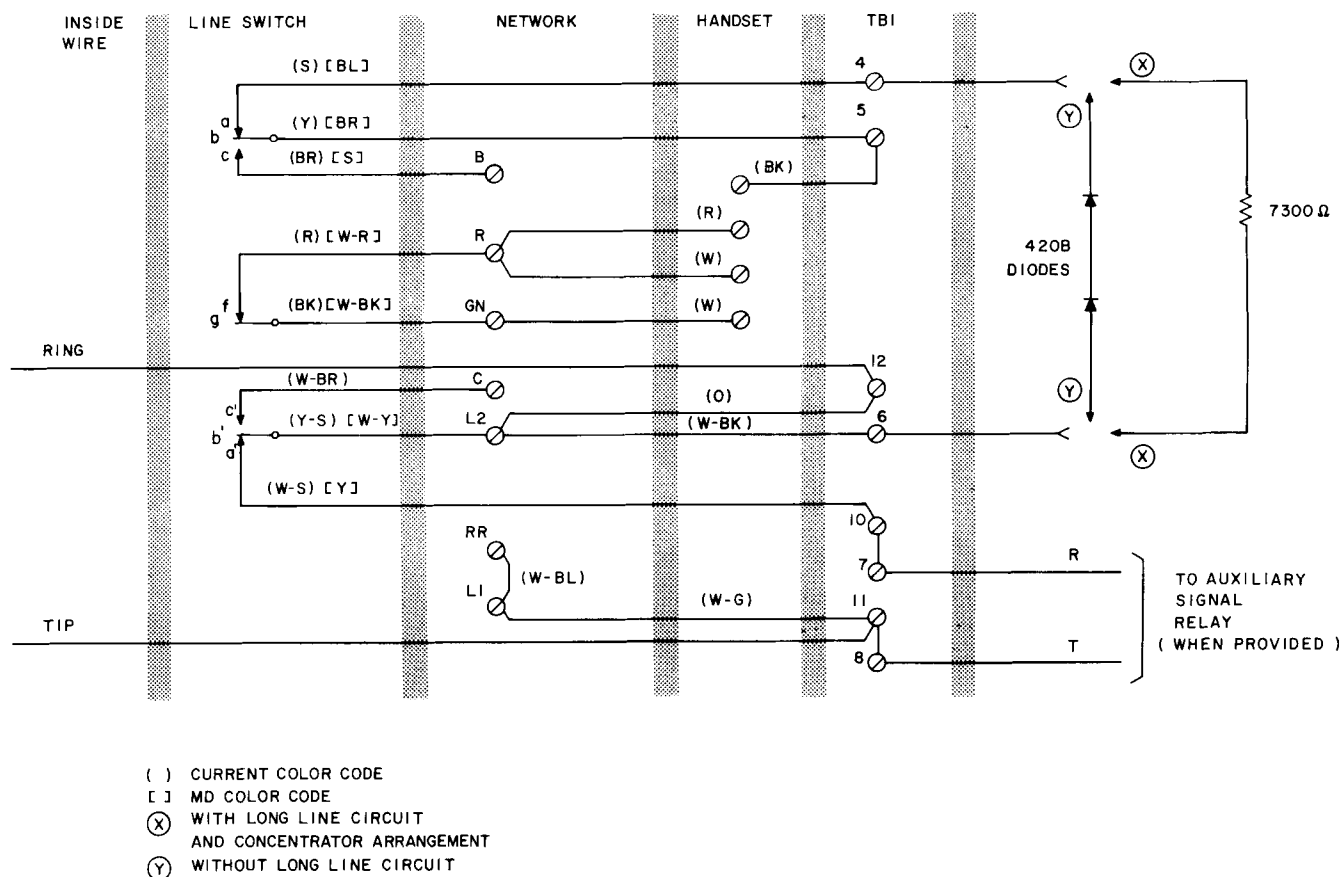


Fig. 6—8L-Type Apparatus Unit, Connections

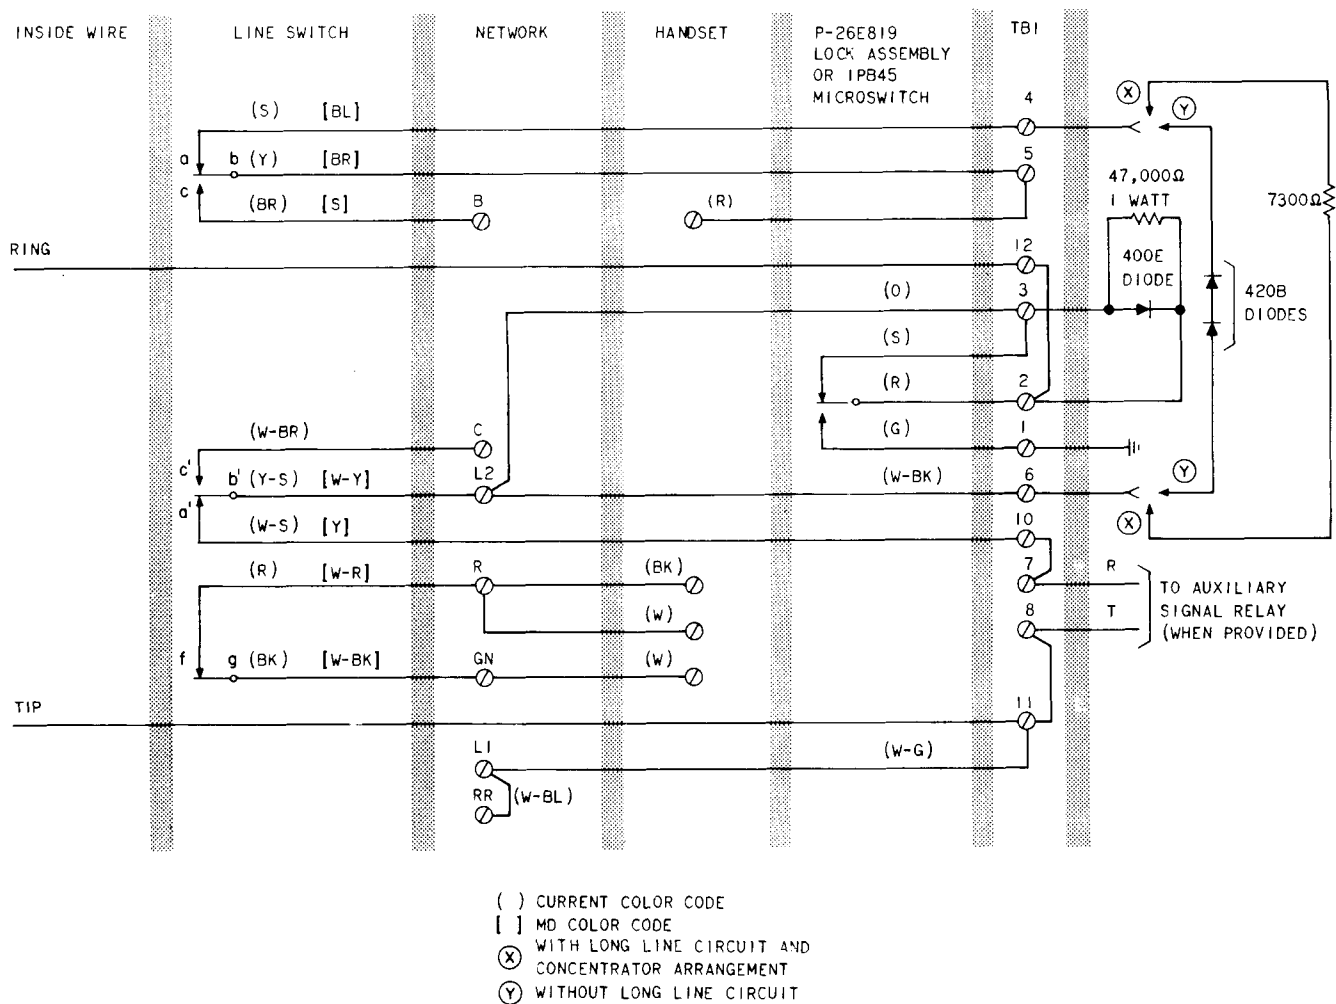


Fig. 7—8M-Type Apparatus Unit, Connections

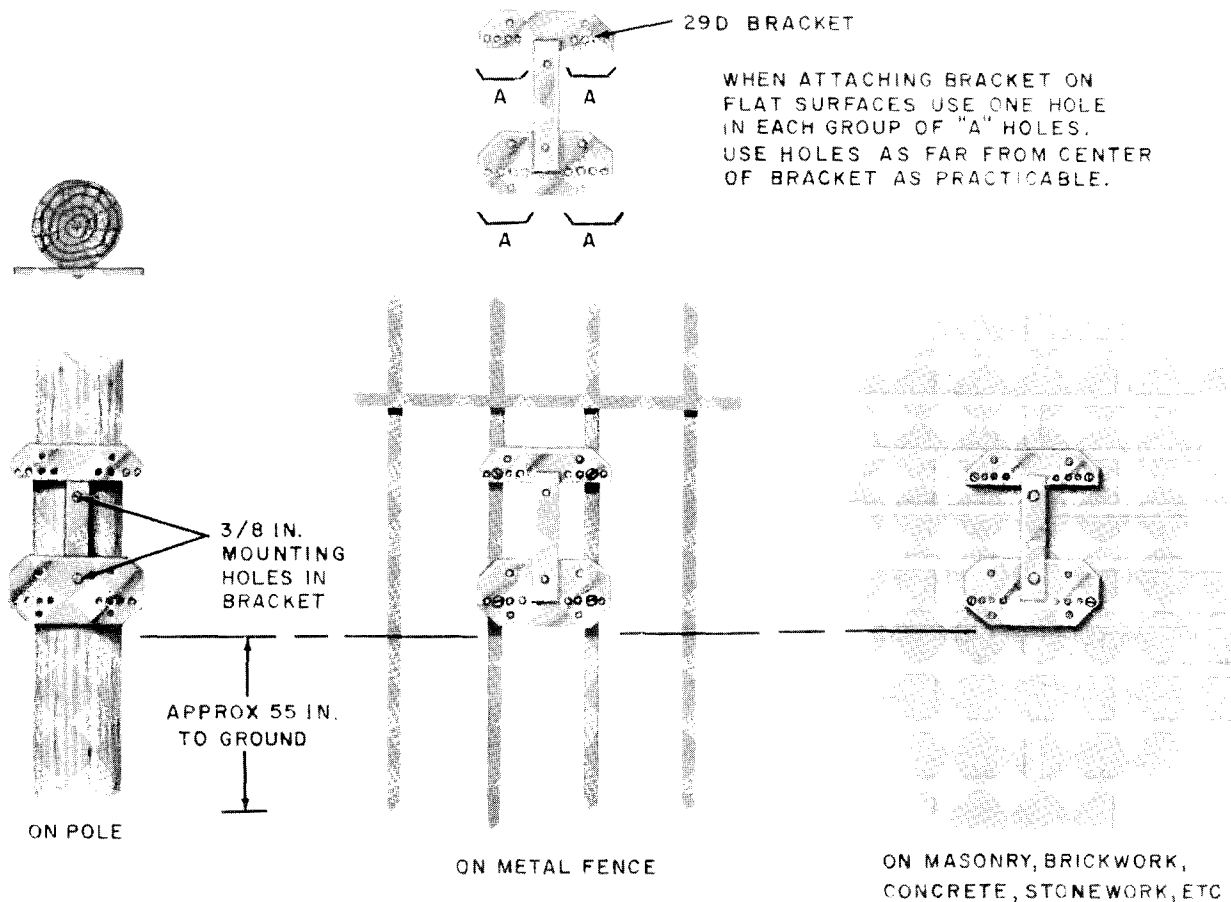


Fig. 8—29-Type Bracket Mounted on Various Surfaces

TABLE A
FASTENERS FOR 29-TYPE APPARATUS BRACKETS

SURFACE	QUAN	FASTENERS
Wood	4	1-1/2 in. No. 14 RH galvanized wood screws
Wood poles	4	2-1/2 in. or longer No. 14 RH galvanized wood screws
Wood poles (where diameter of pole is 8 inches or less)	2	5/16 x 3 in. coach screws or 2-1/2 in. or longer No. 14 RH galvanized wood screws
Finished masonry, brickwork, concrete, etc	4	5/16 x 2-1/4 in. hammer drive anchors, or approved equivalent
Solid metal — metal fences, columns, etc*	4	1 x 5/16 in. No. 18 RH brass machine screws. Drill and tap holes using 17/24 in. drill and 5/16 in. No. 18 tap
Hollow tile, corrugated metal, plaster board, etc	4	1/4 x 4 in. RH toggle bolts

* Iron straps, bolts, etc may be used where local instructions permit. Attach telephone set securely.