


SERVICE

2500S TELEPHONE SETS

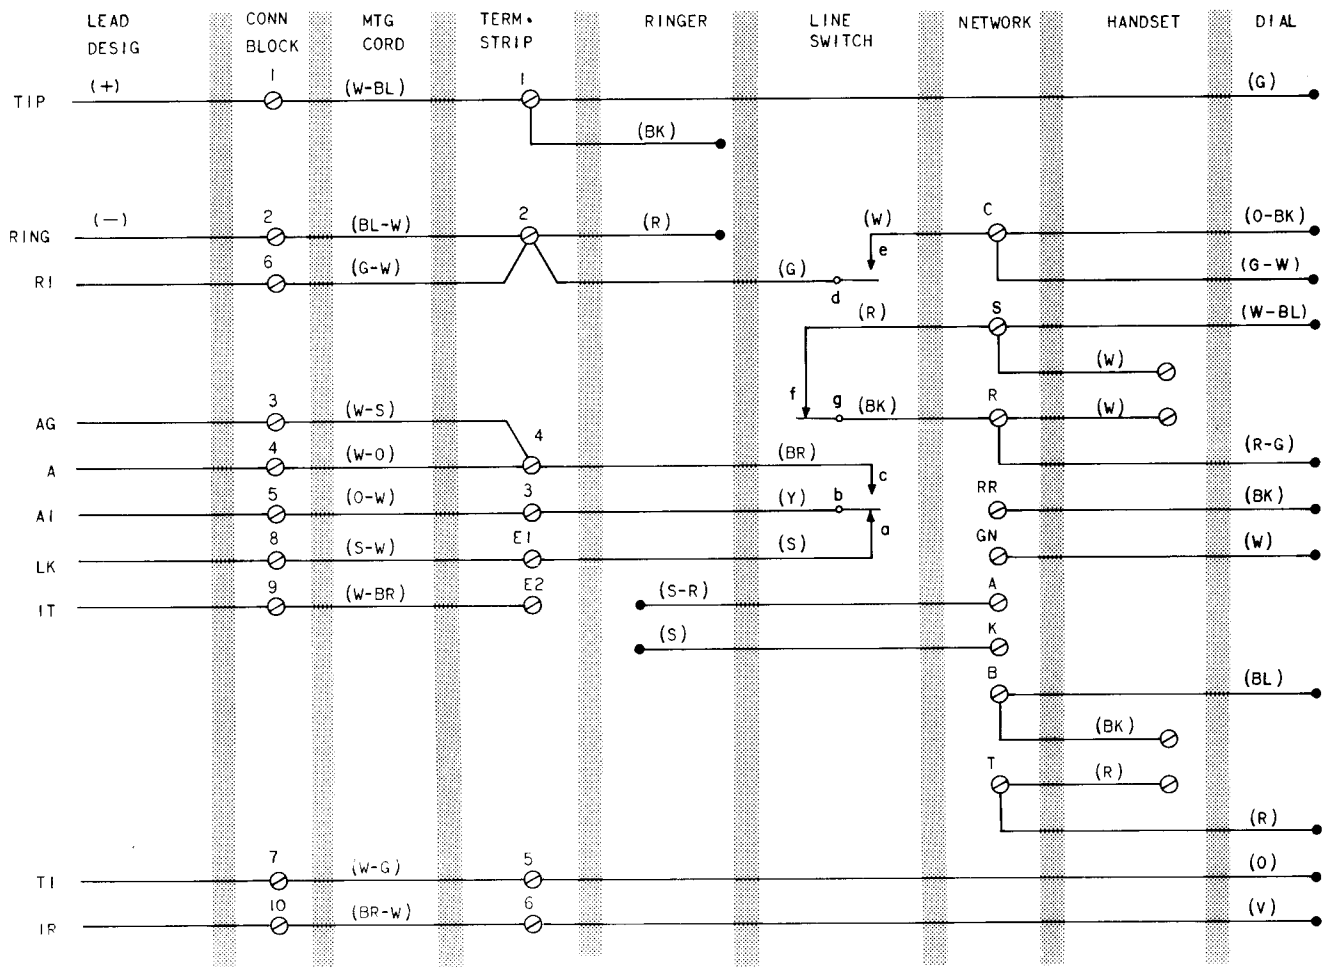

NOTE:

FACTORY WIRED FOR BRIDGED SERVICE.
FOR RING PARTY MOVE (BK) RINGER LEAD
FROM TERMINAL 1 TO TERMINAL 3. FOR
TIP PARTY MOVE (R) RINGER LEAD FROM
TERMINAL 2 TO TERMINAL 3.

Fig. 1—2500S Telephone Set, Connections

TABLE A
P-90D052 POLARITY GUARD CONNECTIONS

LEAD		REMOVE FROM NETWORK	CONNECT TO	
			NETWORK	POLARITY GUARD
Line Switch	(W)	C		S
Dial	(G-W) (BK)	C RR		S T
Polarity Guard	(W) (G)		C RR	

Note: For use when specified by local instructions for end-to-end signaling installation.