

228A AND 265A KEY TELEPHONE UNITS IDENTIFICATION

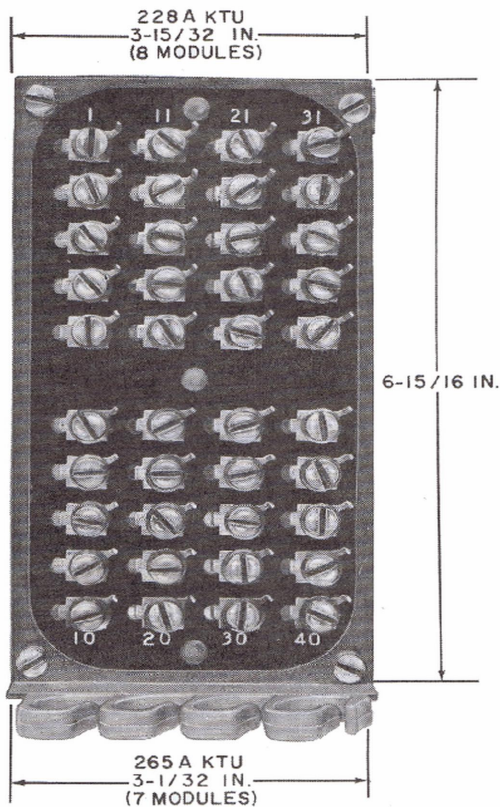


Fig. 1—Rear View of 228A or 265A KTU

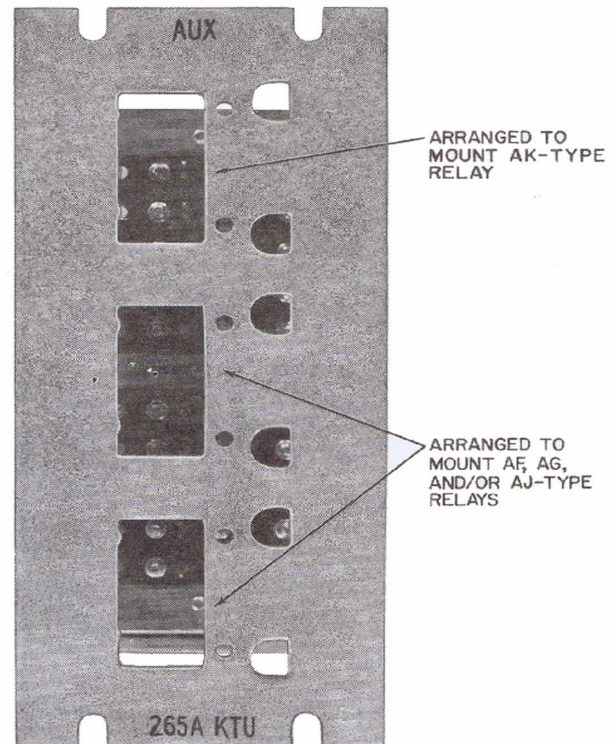


Fig. 2—Front View of 265A KTU

- 228A KTU has blank undrilled front panel

1. PURPOSE

(a) 228A KTU

- For bridging in Key Telephone Systems or as required by field.

(b) 265A KTU

- For mounting of relays by field forces where special circuit designs are required.
- Can also be used for bridging if desired.