

TELEPHONE SETS—354A, C COMMON BATTERY — CONNECTIONS

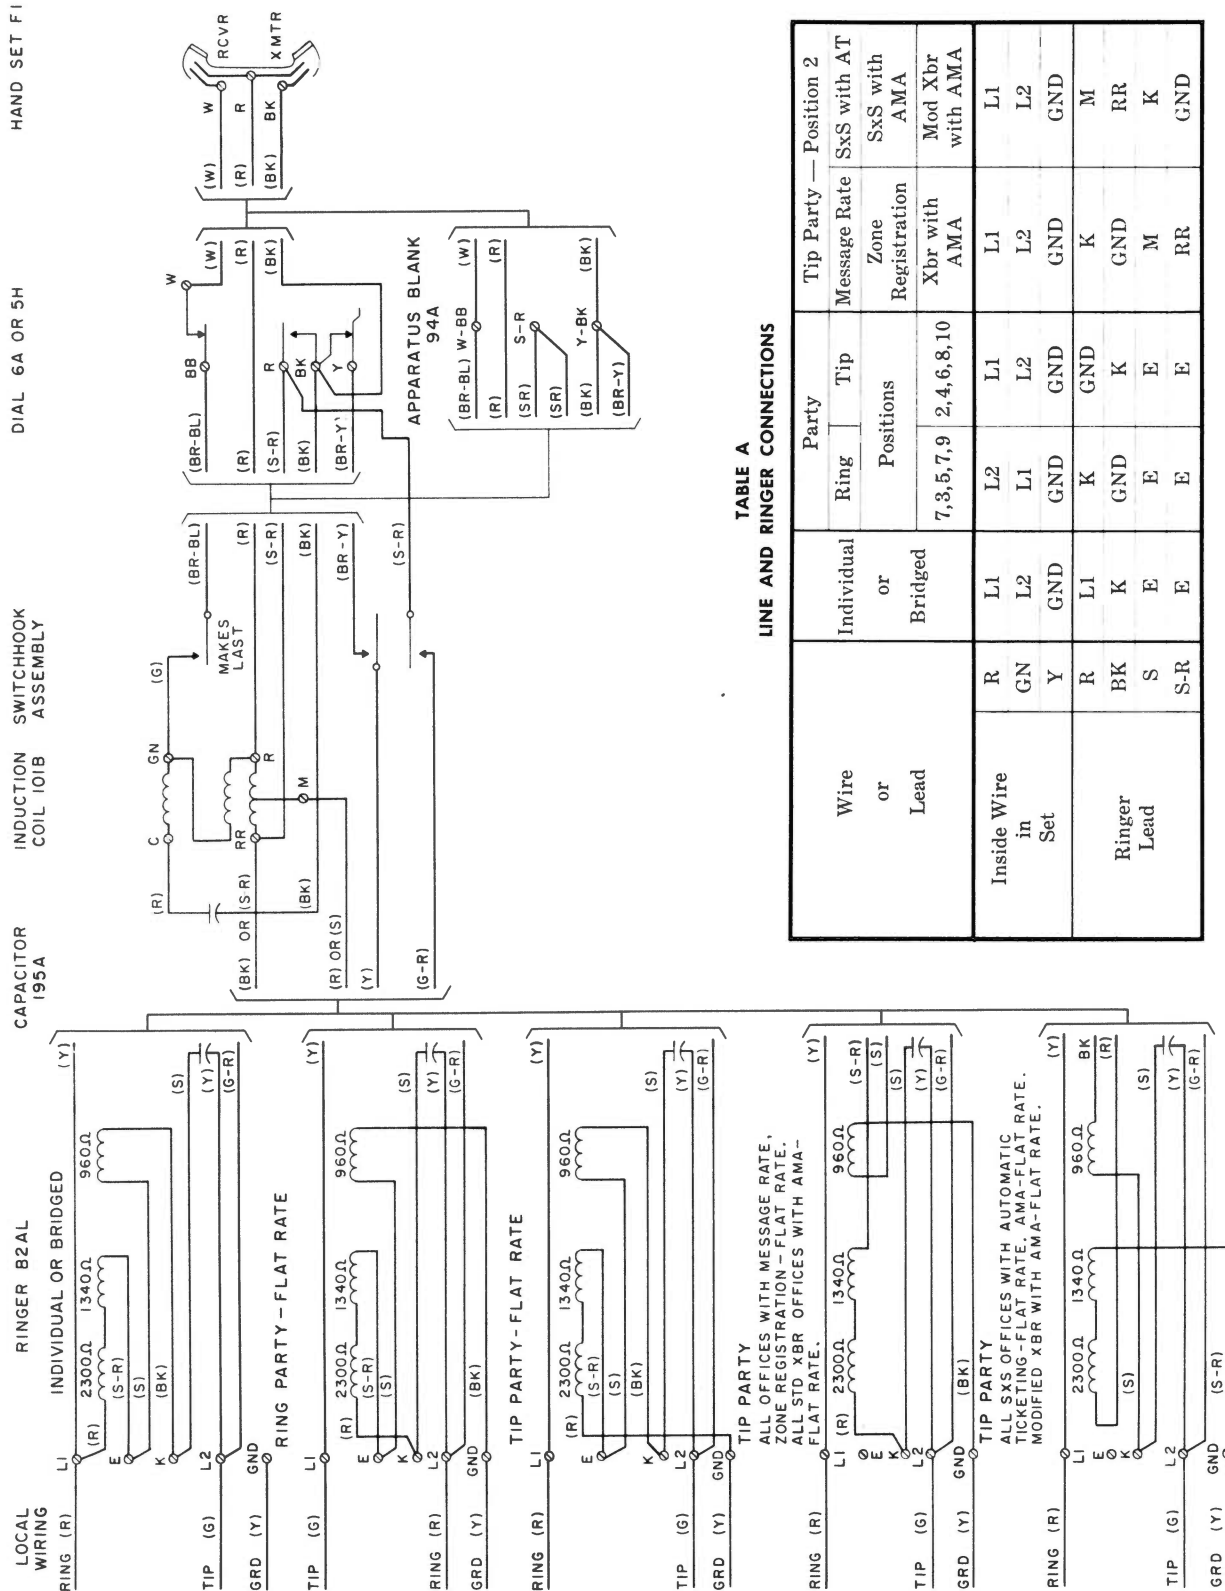


Fig. 1 — 354A, C Telephone Sets

TABLE B
RINGER LEAD CONNECTIONS
TO SILENCE RINGER PERMANENTLY

Class of Service	Ringer Leads			
	R	BK	S	S-R
Individual or Bridged Ring Party Tip Party — Flat Rate	K	K	E	E
Tip Party Message Rate Zone Registration Xbr with AMA	K	GND	M	K
Tip Party SxS with AT SxS with AMA Mod Xbr with AMA	M	K	K	GND

TABLE C
FILTER (Optional)

Type Filter	Filter Leads	Filter Lead Termination
61E or 61G	BK	BK of Dial
	Y	Y of Dial
	R	Filter Bracket Terminal; also, disconnect BR-Y lead from Y of dial and reconnect to filter bracket terminal.