


TELEPHONE SETS—1554B
CONNECTIONS

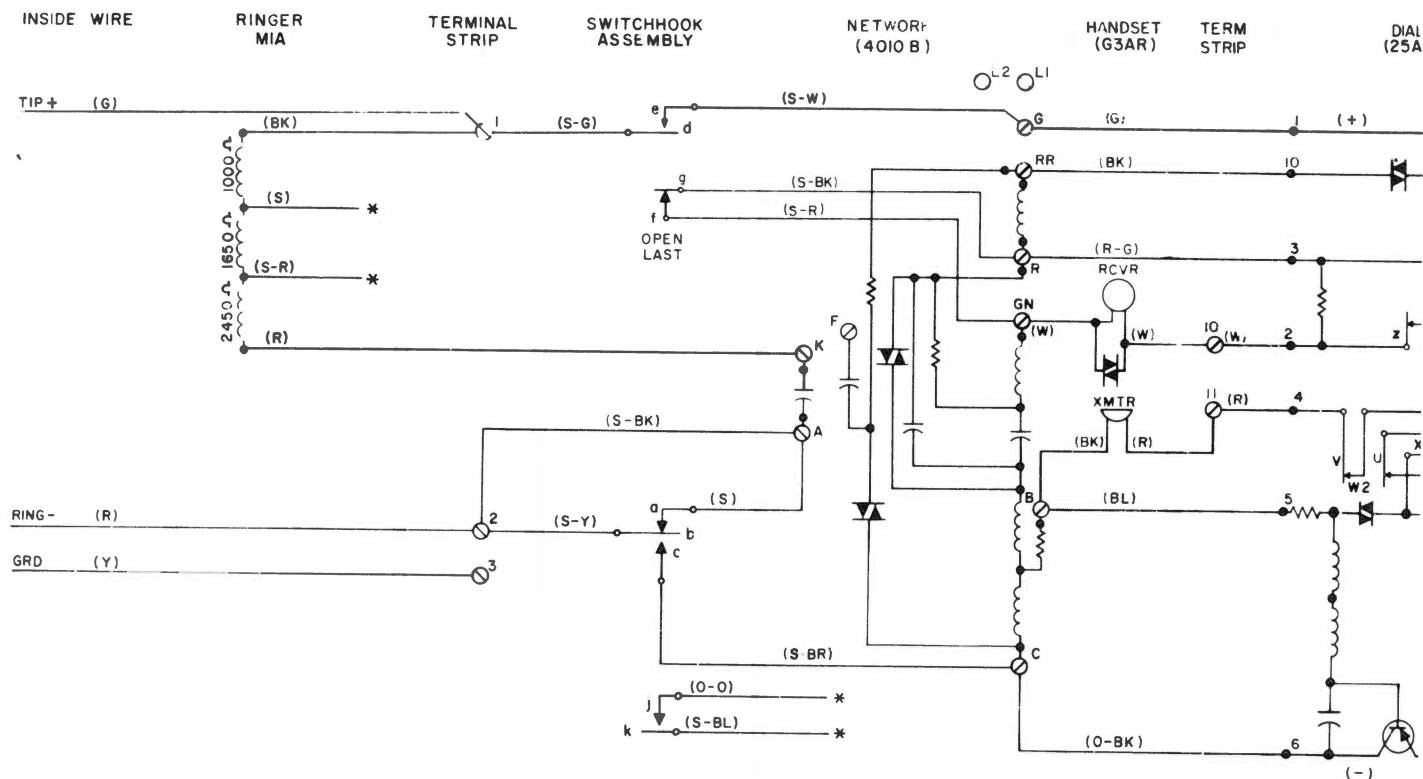

Note 1: Connections shown are for individual or bridged service. For other classes of service, see Table A.

Note 2: To silence ringer permanently, see Table B.

* Insulate and store.

Fig. 1 — 1554B Telephone Set, Connections

3)

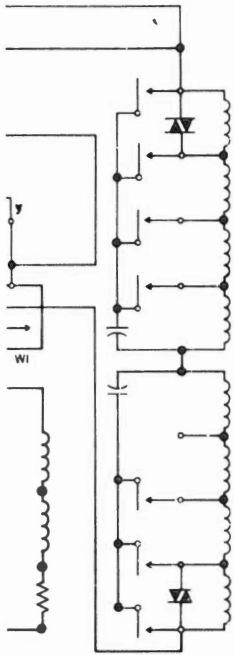


TABLE A
LINE AND RINGER CONNECTIONS

Wire or Lead			Individual or Bridged	Ring Party	Tip Party		
					No Ident Grd	Ident Grd Ohms	
						1000	2650
Inside Wire in Set	Ring	R	2	2	1	1	1
	Tip	G	1	1	2	2	2
	Grd	Y	3	3	3	3	3
Ringer Leads	R		K	K	K	K	K
	BK		1	3	3	3	3
	S		*	*	*	B	*
	S-R		*	*	*	*	B
Switchhook Leads	S		A	A	A	A	A
	S-W		G	G	C	C	C
	S-BR		C	C	G	G	G

* Insulate and store.

TABLE B
RINGER LEAD CONNECTIONS TO SILENCE RINGER PERMANENTLY

Tip Party Identifying Ground	Ringer Leads			
Ohms	R	BK	S	S-R
1000 Ohms	*	3	B	*
2650 Ohms	*	3	*	B
All other classes of service except those listed above: Move (BK) ringer lead to K terminal of network				

* Insulate and store.