


TELEPHONE SETS

701D

CONNECTIONS

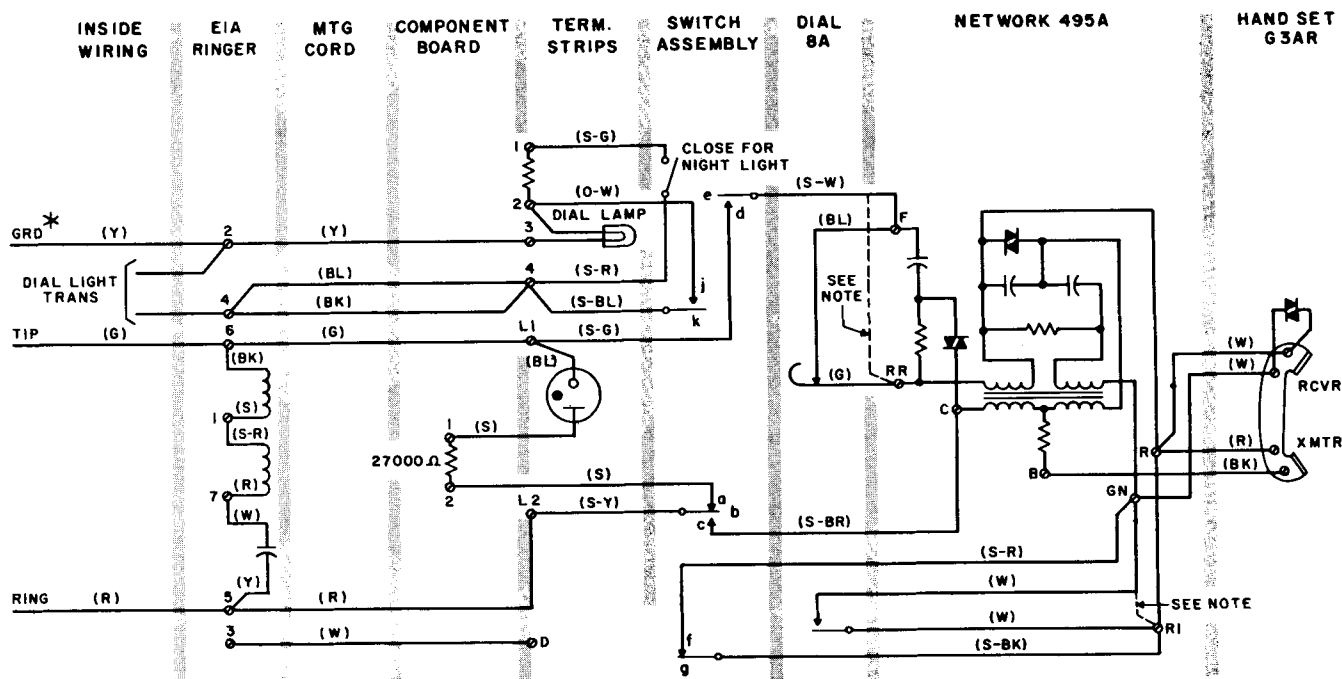

Note: Dotted line indicates connection for manual service. Dial remains on the set.

* Ground may be omitted; not required for protection of dial-light transformer.

Fig. 1 — Connections for 701D Telephone Set

TABLE A
LINE AND RINGER CONNECTIONS

Wire or Lead		Individual or Bridged	Ring Party	Tip Party†
Line at Ringer	Ring	R	5	5
	Tip	G	6	6
	Grd	Y	2	2
Ringer	R	7	7	7
	S-R	1	1	1
	BK	6	2	2
	S	1	1	1
Capacitor in Ringer	W	7	7	7
	Y	5	5	6
Transformer Leads at Ringer	1	2	2	2
	2	4	4	4
Mounting Cord at Ringer	R	5	5	6
	G	6	6	5
	Y	2	2	2
	BL	4	4	4
	W	3	3	3
	BK	4	4	4
Mounting Cord at Set	R	L2	L2	L2
	G	L1	L1	L1
	Y	3	3	3
	BL	4	4	4
	W	D	D	D
	BK	4	4	4
Message-Waiting Lamp Leads	S	11	11	11
	BL	L1	L1	L1

† Except tip parties requiring identifying ground.

‡ Terminal on component board.