



TELEPHONE SETS—1500M
CONNECTIONS

LEAD DESIG MTG CORD TERMINAL
D4BJ STRIP

C4A RINGER

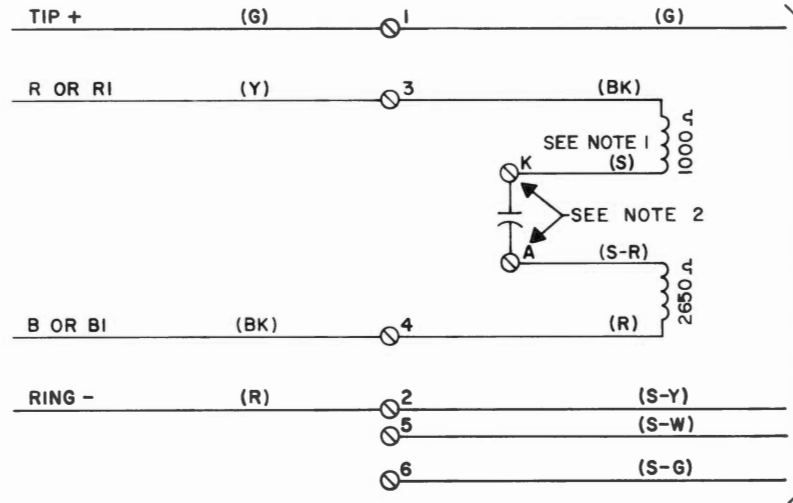

SEPARATE RINGER CONTROL

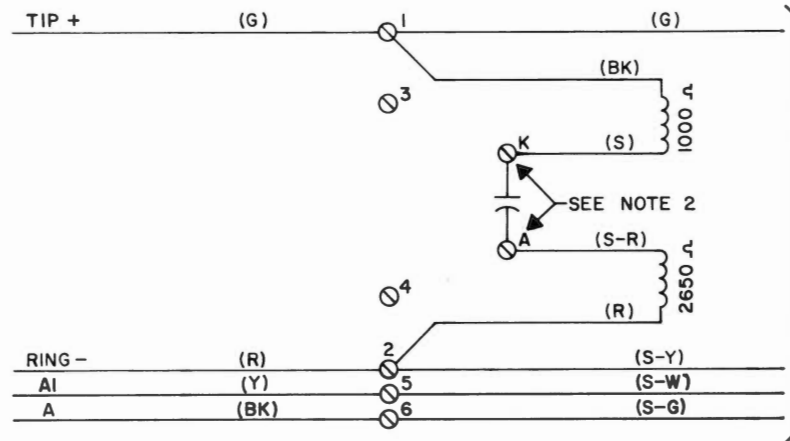

1A1 AND 1A2 KEY TELEPHONE SYSTEMS


SWITCHHOOK
ASSEMBLY

NETWORK
425E

HAND SET
G3A

TERM
STRIP

DIAL
25A3

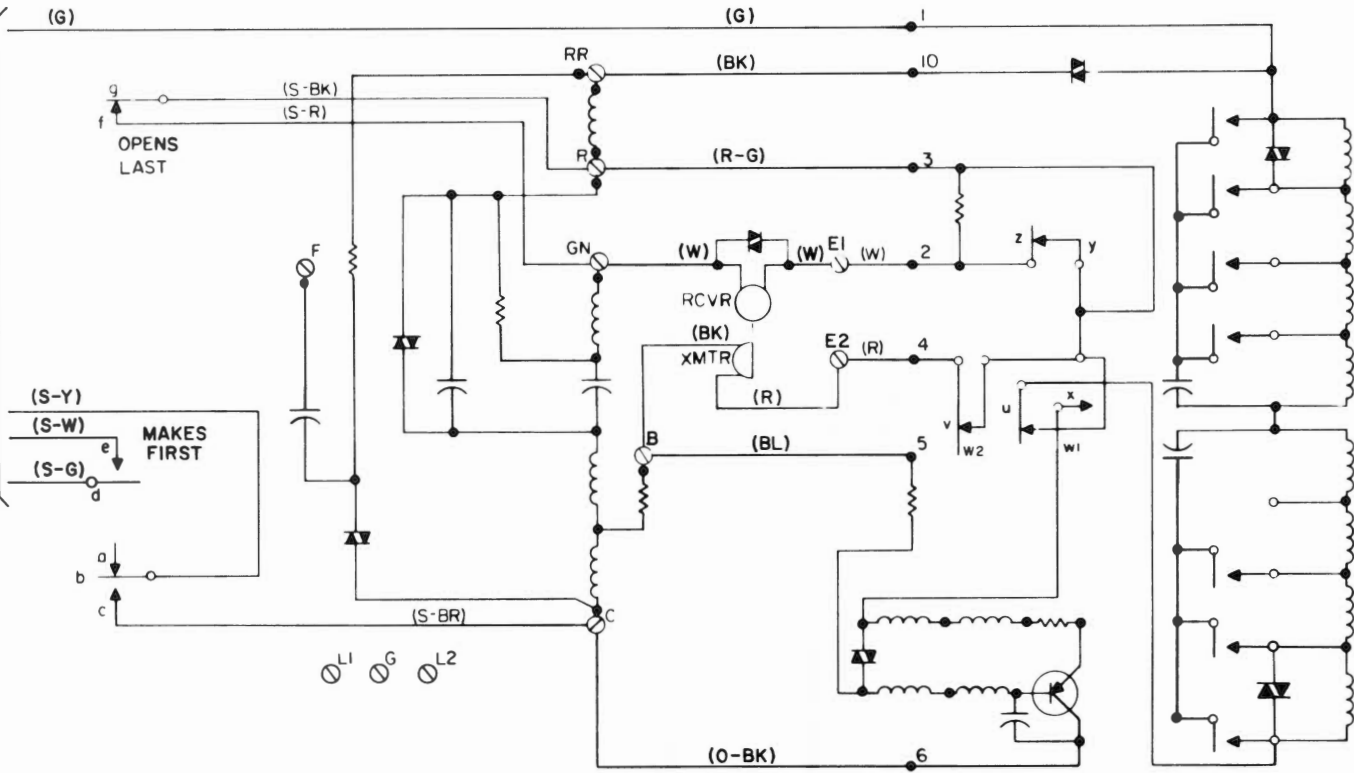

NOTE 1: WHEN RINGING CAPACITOR IS NOT REQUIRED,
MOVE (S) RINGER LEAD TO A OF NETWORK.
NOTE 2: THESE TERMINALS ARE ON THE 425E NETWORK.

TABLE A
LINE AND RINGER CONNECTIONS

FEATURE	CONNECTIONS IN SET										MTG CORD AT CONN BLK					
	MOUNTING CORD						RINGER LEADS				LINE	PVT. OR COM. RING	1A1 OR 1A2 KTS			
	G	R	Y	BK	BL	W	BK	R	S	S-R	TIP	RING	R-R1	B-B1	A1	A
SEPARATE RINGER CONTROL	1	2	3	4			3	4	K	A	G	R	Y	BK		
1A1 AND 1A2 KEY TEL SYSTEM	1	2	5	6			1	2	K	A	G	R			Y	BK
SEPARATE RING CONTROL AND 1A1 AND 1A2 KTS *	1	2	5	6	3	4	3	4	K	A	G	R	BL	W	Y	BK

* REPLACE D4BJ MOUNTING CORD WITH D6AA CORD

Fig. 1 - 1500M Telephone Set