

B&M# 748
OPERATOR TELEPHONE SETS

METHOD OF WRAPPING CORDS AND ASSOCIATED PARTS

1. GENERAL

1.01 This section covers standard methods of wrapping the cords and associated parts of operator telephone sets.

1.02 This section is reissued to revise wrapping information for 52-type head telephone sets, to cover the method of wrapping the cord equipped with the No. 396A plug, and to delete wrapping of breast-type sets. Issue 4 of this section was not given distribution.

1.03 52-type head telephone sets equipped with the No. 101A pad cannot be wrapped as outlined herein because of interference between the pad and the headband yoke. No standard method is provided for headsets so equipped since the pads are intended to be used infrequently and then for only short periods of time. Sets so equipped can be stored in any convenient manner until the pad is removed.

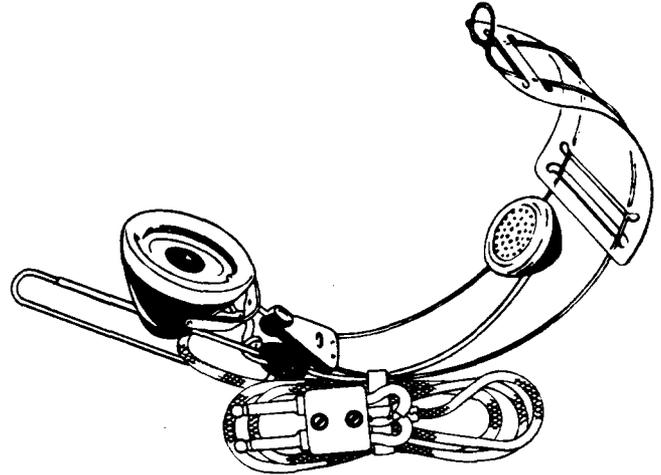


Fig. 2(A) – Cord Equipped With the 289-Type Plug

2. 52-TYPE HEAD TELEPHONE SETS

Head Telephone Sets With Nonspring Cords

2.01 When removing the set from the head and handling it, hold the receiver at the swivel posts as shown in Fig. 1.

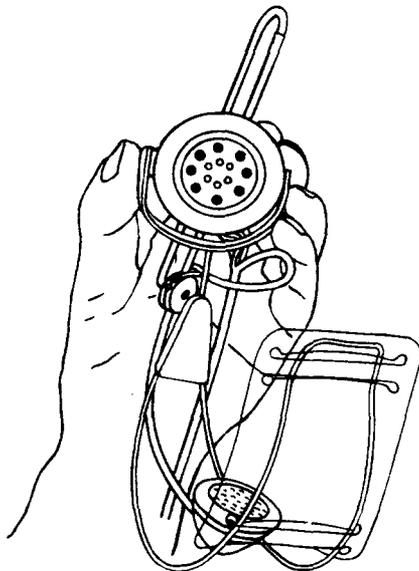


Fig. 1 – Handling the 52-Type Head Telephone Set

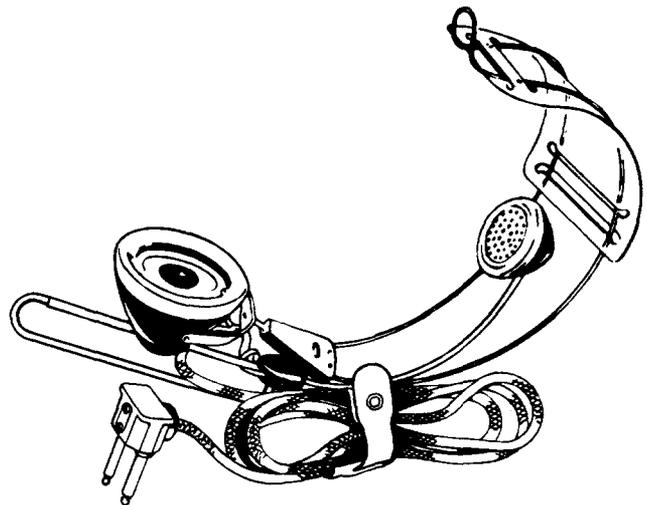


Fig. 2(B) – Cord Equipped With the No. 396A Plug

Fig. 2 – Wrapping the Cords Associated With the 52-Type Head Telephone Sets

SECTION 028-360-821

2.02 Wrap and store the set as follows.

2.03 Drop the headband yoke over and in front of the receiver and rotate the headband wires so that they lie along the transmitter arm, as shown in Fig. 2.

2.04 Bring the plug up to within several inches of the receiver and fold the cord as shown in Fig. 2. Then snap the fastener around the folds of the cord, transmitter arm, and one wire of the headband.

2.05 If difficulty is met in closing the fastener associated with the cord equipped with the 289-type plug, check whether the fastener is assembled over a No. 126 cord tip on the stay hook. If so, the cord tip should be removed and the fastener reassembled on the stay hook as covered in Section A504.004.

2.06 Place the set in the cabinet carefully with the transmitter and receiver faces up, as shown in Fig. 2. Avoid treating the set roughly.

Head Telephone Sets With Spring Cords

2.07 In the case of a head telephone set with a spring cord, the nonspring portion of the cord is folded as shown in Fig. 2(A). The spring portion of the cord is not included under the fastener, but is folded separately and the set placed in the cabinet so that the loose folds are toward the rear of the compartment.

3. 1020-TYPE HEADSETS

3.01 When removing the headset from the head, hold each receiver at the swivel posts.

3.02 Hold both receivers in one hand and wrap the cord around the set just above the receivers. Position the plug so that the plug fingers straddle about four turns of the cord adjacent to the plug. Avoid positioning the plug in such a way that the plug fingers rub against the adjacent receiver cap.

3.03 Place the headset in the cabinet in the position specified by local practice.