



2500 39 M TYPE TELEPHONE

WIRING DIAGRAM

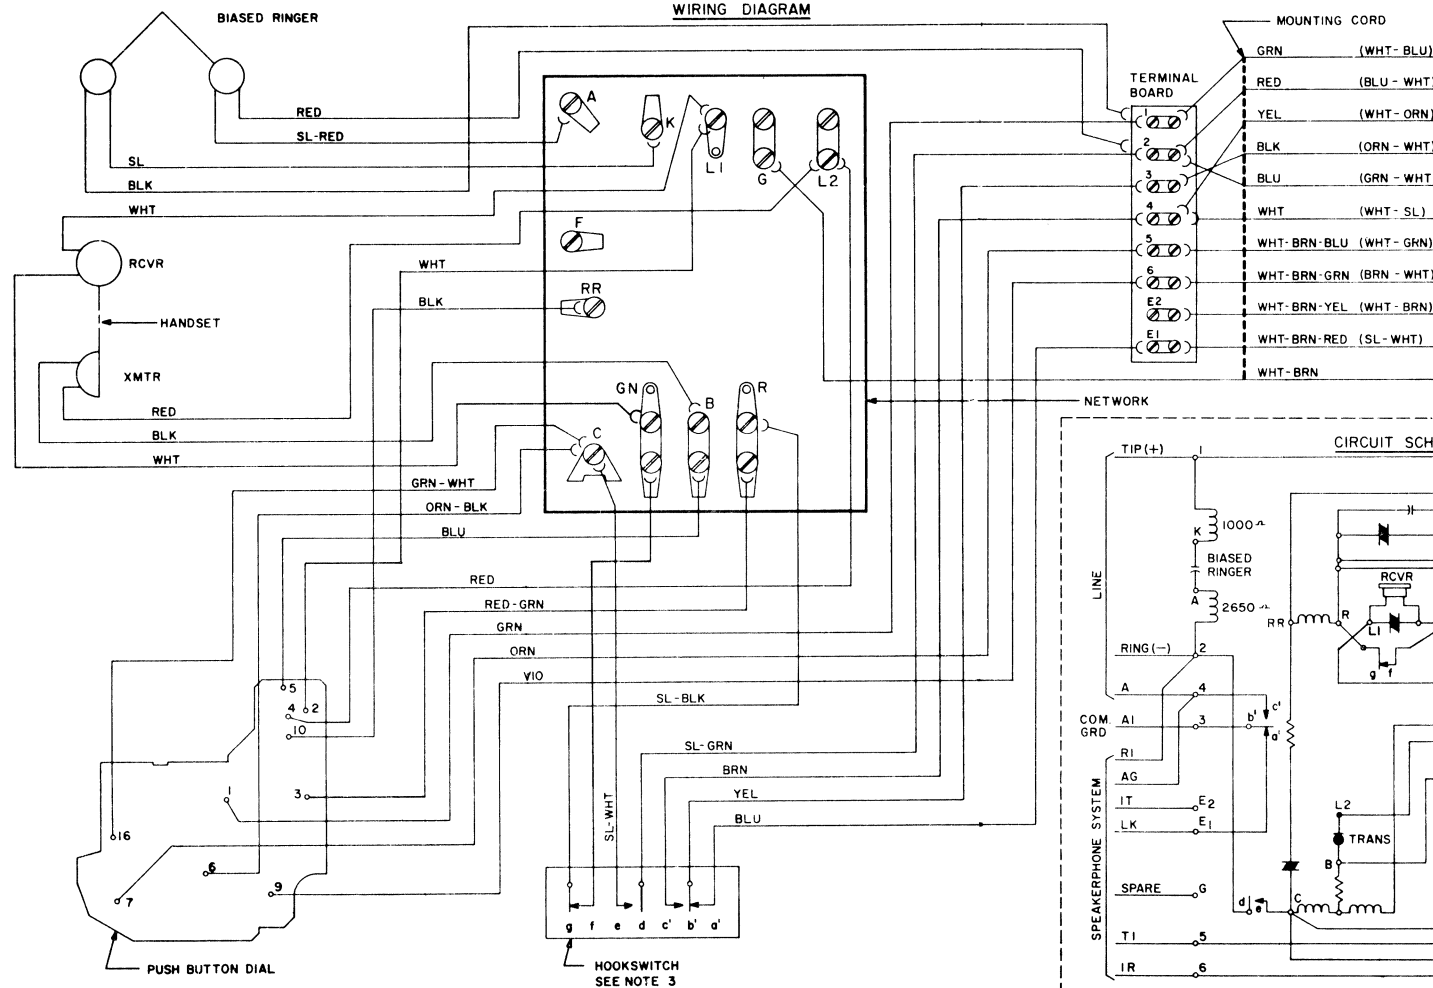

MOUNTING CORD



GRN	(WHT-BLU)
RED	(BLU-WHT)
YEL	(WHT-ORN)
BLK	(ORN-WHT)
BLU	(GRN-WHT)
WHT	(WHT-SL)
WHT-BRN-BLU	(WHT-GRN)
WHT-BRN-GRN	(BRN-WHT)
WHT-BRN-YEL	(WHT-BRN)
WHT-BRN-RED	(SL-WHT)
WHT-BRN	

NOTES:

1. RINGER CONNECTED FOR BRIDGED SERVICE FOR RING PARTY MOVE RINGER (BK) LEAD FROM TERM. 1 TO TERM. 3. FOR TIP PARTY MOVE RINGER (R) LEAD FROM TERM. 2 TO TERM. 3.
2. () INDICATES W.E. COLOR CODE
3. WHEN HANDSET IS REMOVED: CONTACTS (b'-d) MAKES BEFORE (a'-b) BREAKS, AND (d-e) MAKES (f-g) BREAKS AFTER ALL OTHER OPERATIONS
4. TAP AND STORE HOOKSWITCH LEADS SL-BRN, SL-YEL, & SL WHICH CORRESPONDS TO CONTACTS a, b, c, WHICH ARE NOT USED ON THIS SUBSET.

CIRCUIT SCHEMATIC

