


BRIDGING SUB. SET CIRCUIT A. C. GENERATOR CONVERTIBLE TO COMM. BATT.

20163

FIG. #1

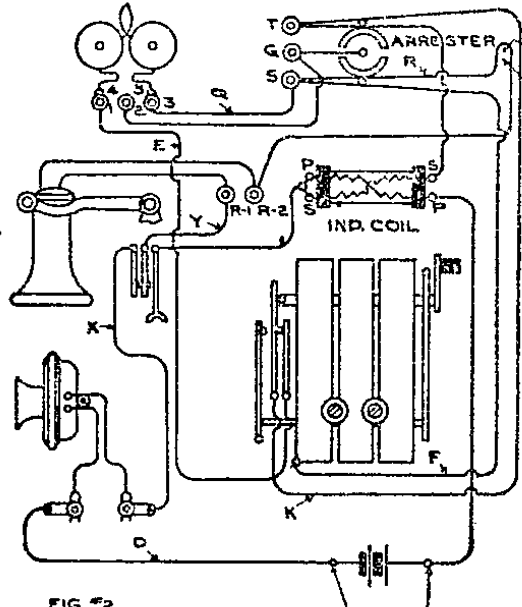

NOTE:
IF COND. IS SPECIFIED
CUT LOOP & INSERT HERE
COND. LOOP

FIG. #3





FIG. #4

FOR RING OWN BELL
STRAP LEADS 'K'
TOGETHER AT GEN.
SPRING.

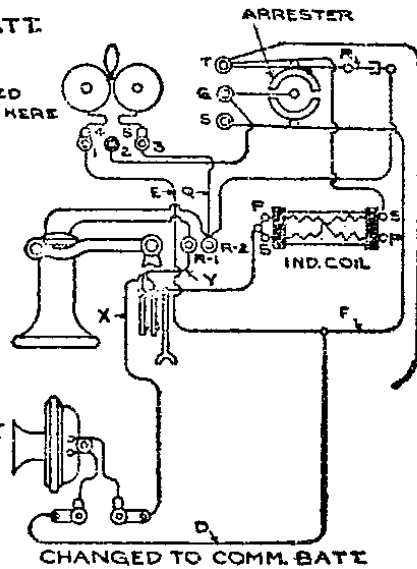

CHANGED TO COMM. BATT.


NOTE: WHEN CHANGING TO COMMON BATT.

1. REMOVE GEN. & BATTERIES.
2. IF COND. IS NOT ALREADY INSTALLED CUT A 1-M-F. COND. IN LOOP.
3. REMOVE 'R' FROM 'S' & SOLDER TO 'Y'.
4. REMOVE 'Q' FROM 'S' & SOLDER TO 'R-2' (IF NOT ALREADY DONE).
5. CONNECT 'D', 'E' & 'F'.
6. TO AVOID 'BAT IN EAR' REVERSE 'X' & 'Y' AT SW. HOOK.

FIG. #2

IF COND. IN RINGER &
SECONDARY CIRCUIT OR
FIG. #2 IS SPECIFIED CONNECT
'Q' TO 'R-2' INSTEAD OF 'S'

BATT. BLDG. POSTS NOT
FURNISHED WHEN BATT.
SPACE IS PROVIDED IN SET.

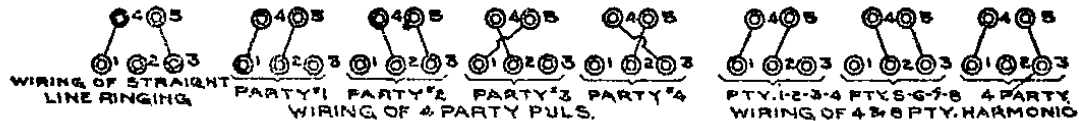

20163

3. 7. 18
1. 12. 17

A.B.