

TELEPHONE SETS — 711B

CONNECTIONS

I. GENERAL


I.01 This section includes schematics for the 711B telephone set when used with the following services:

- Exclusion on line 1, 2-line pickup, and signaling (Fig. 1).
- 3A Speakerphone (Fig. 1).
- 1-line pickup, cutoff extension station, or extension line ringer (Fig. 2).
- 1A HOME INTERPHONE (Fig. 3).
- 2A FARM INTERPHONE (Fig. 4).

I.02 This section is reissued to delete ground strap on Fig. 1, 3, and 4.


I.03 When using the 711B telephone set with the 1A HOME INTERPHONE and the 2A FARM INTERPHONE systems, refer to sections covering these systems for telephone set wiring modifications.

I.04 The dial light transformer can be damaged by lightning if a sufficient difference in ground potential occurs between the telephone plant and the power system. In all cases requiring lightning protection, be sure that the telephone and power grounds are interconnected. See section on protector and signaling grounds.

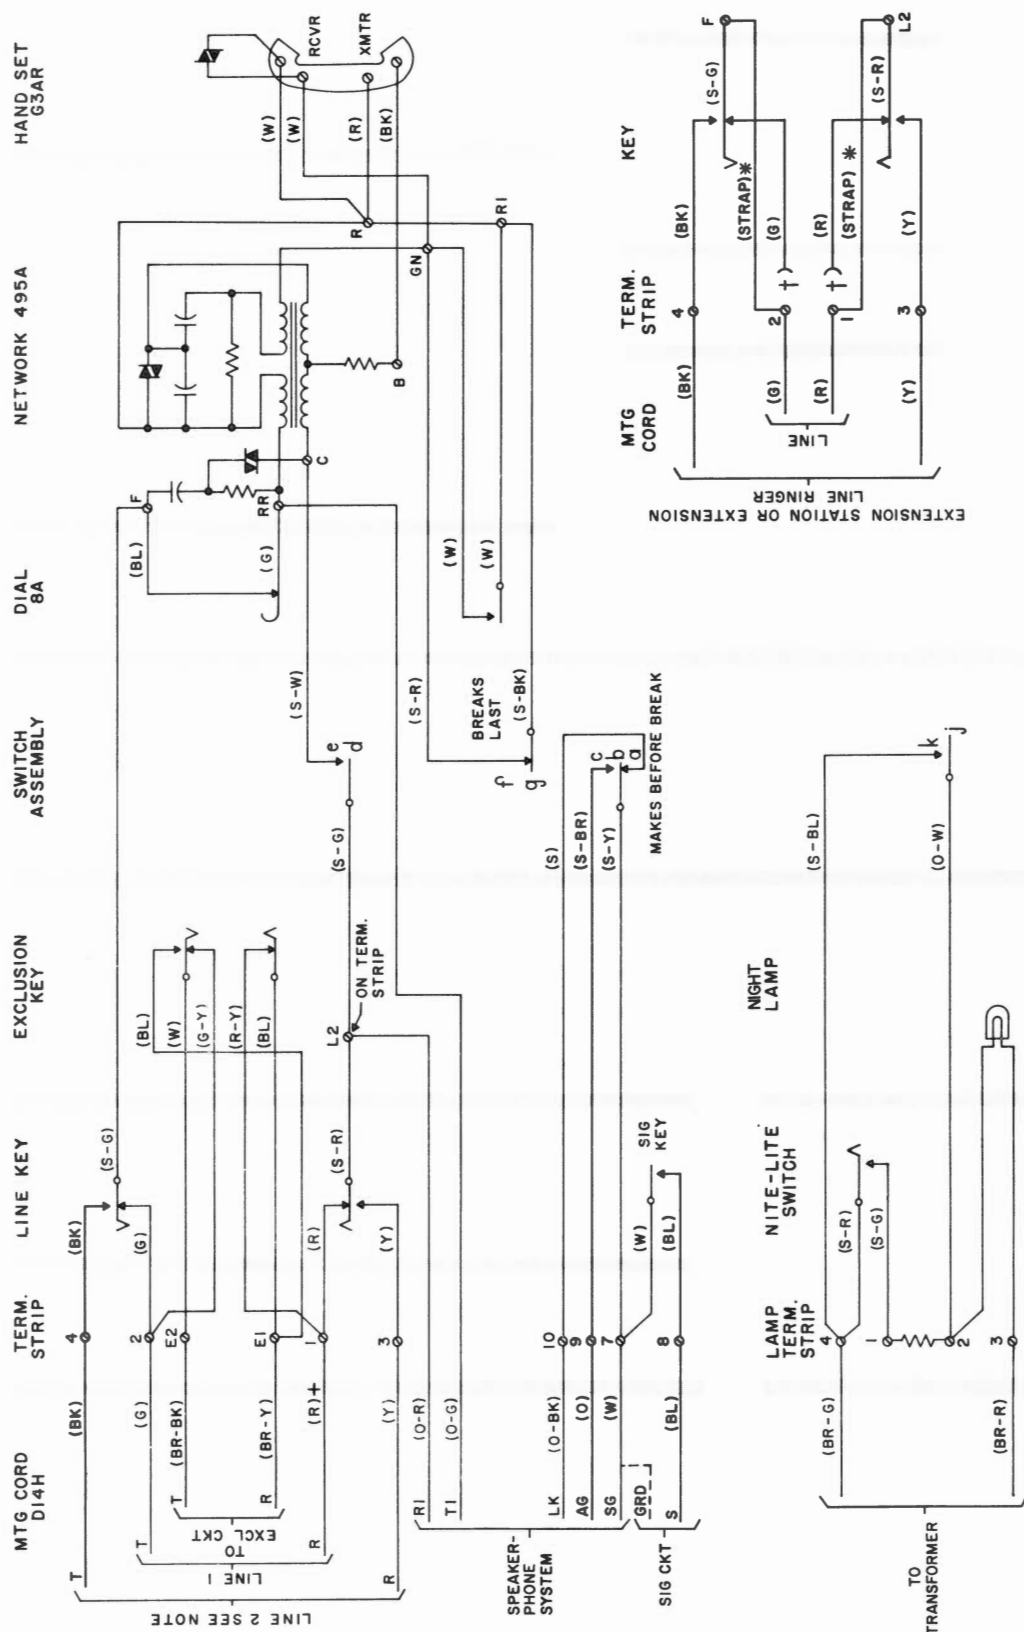

Note: Handset must be in "off hook" condition when dialing.
A 701-type telephone set can be used with speakerphone if signal, exclusion, or 2-line pickup is not needed.

Fig. 1 - 711B Telephone Set (2-Line Pickup, Exclusion, Signaling, and 3A Speakerphone)

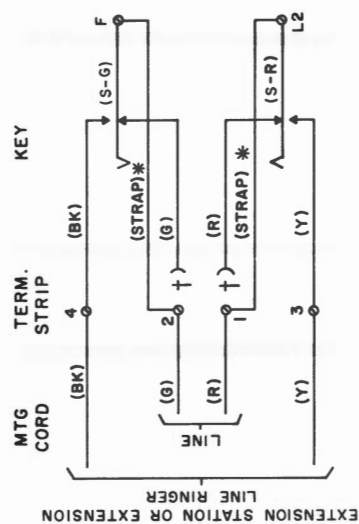

* PLACE STRAPS.

+ INSULATE INDIVIDUALLY AND STORE

Fig. 2 - 711B Telephone Set (1-Line Pickup, Cutoff Extension Station, or Extension Line Ringer)


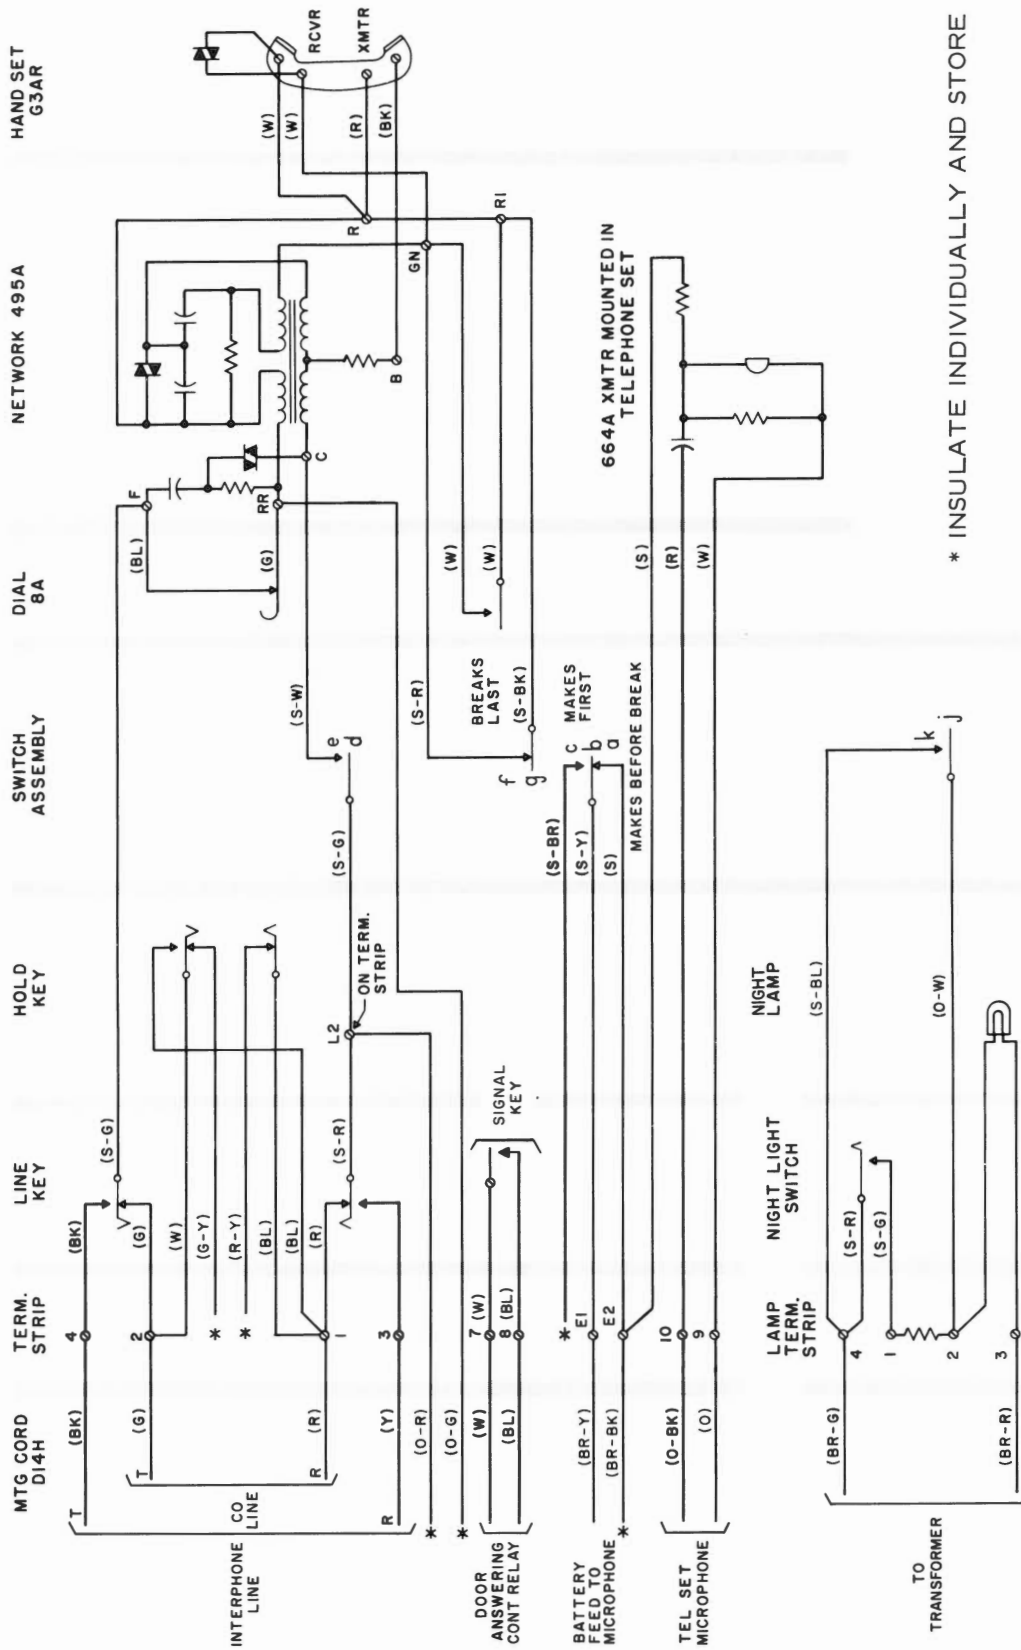


Fig. 3 - 711B Telephone Set — Connections To 1A HOME INTERPHONE

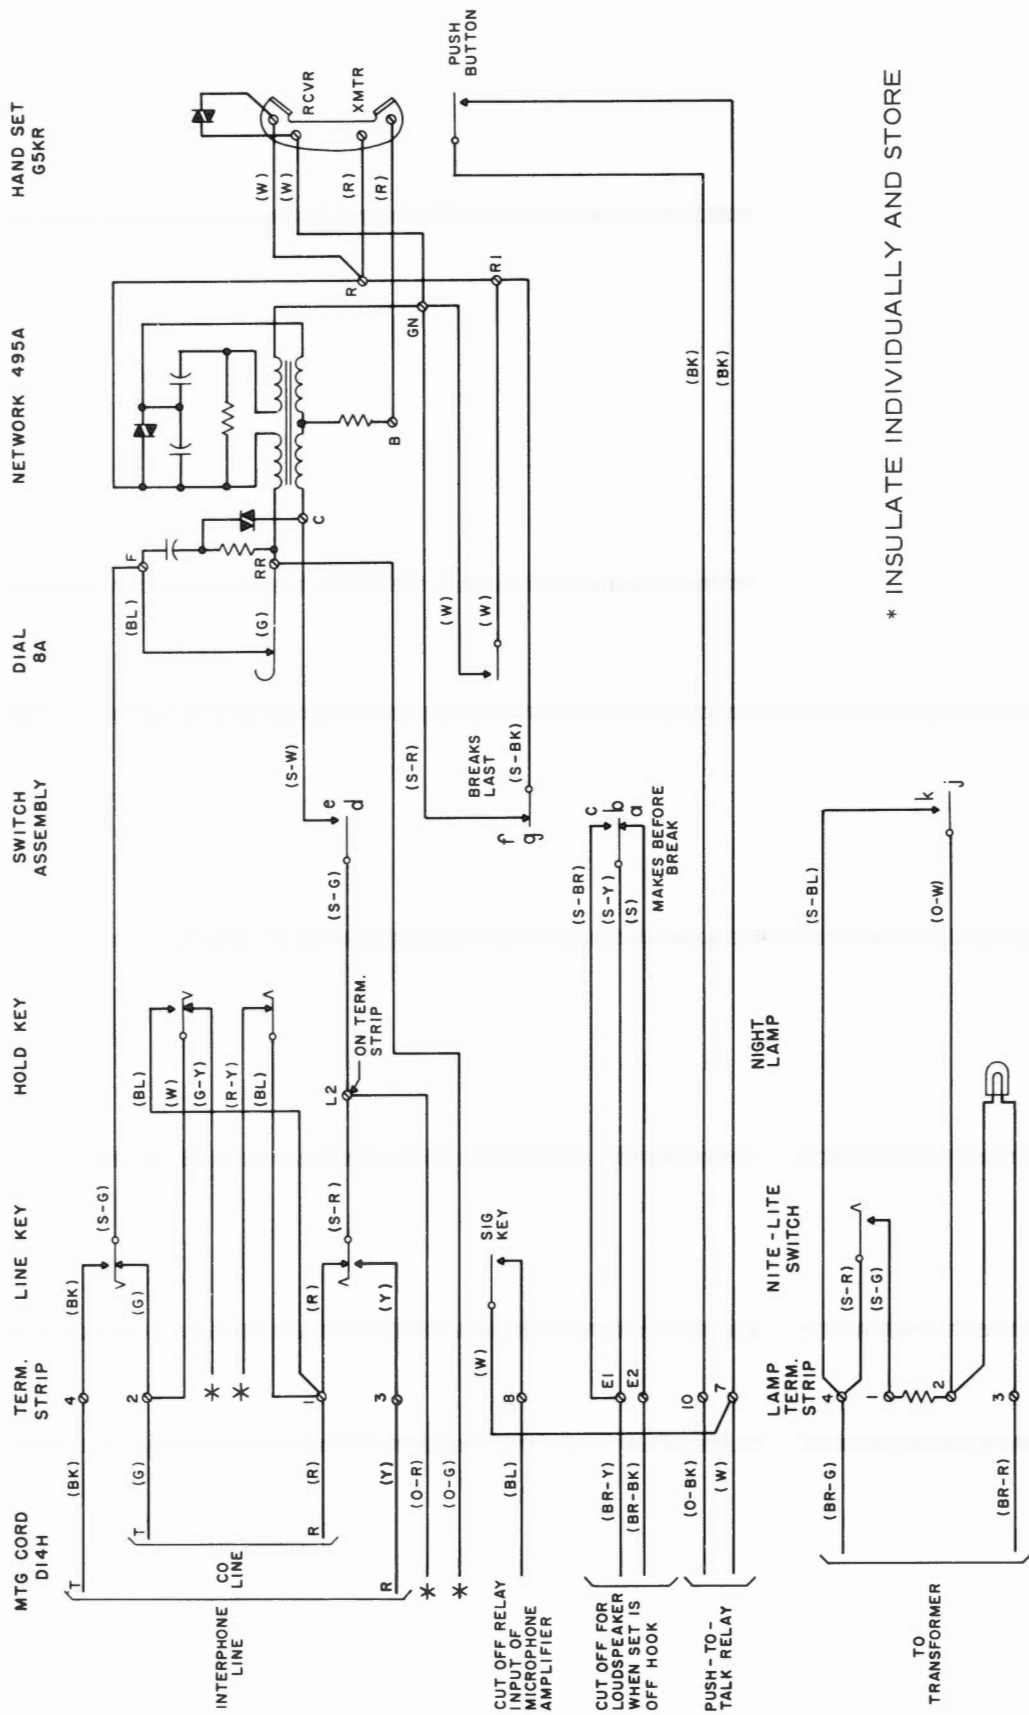

* INSULATE INDIVIDUALLY AND STORE

Fig. 4 - 711B Telephone Set — Connections To 2A FARM INTERPHONE